



www.eng.com.tw

AC-DC 6W


3A-066WPxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requiement
- 100% burn in test
- 1 year warranty
- **Meet UL,cUL,GS,CB,CE,FCC standard**
- Meet EPS 2.0 LEVEL V



Dimension:

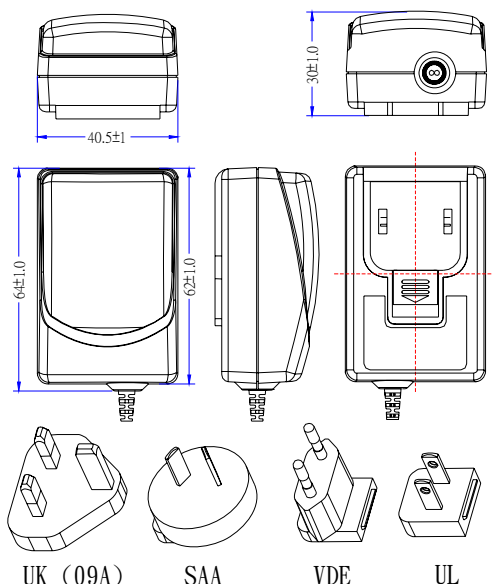

Model No.	Output		Additional Safety
3A-066WP05	5V	1.2A	
3A-066WP06	6V	1A	

Specification:

Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	300mA
	Leakage Current	< 0.1mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Conversing)
M.T.B.F	50k Hours	
Safety Meet	UL 60950,CSA C22.2 No.60950,EN60950,IEC 60950	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4

英格爾科技股份有限公司
ENG ELECTRIC CO.,LTD.

TEL:886-3-212-1122 FAX:886-3-2121570

台灣省桃園縣龜山鄉民生北路1段536號5樓
 5F, No. 536, Sec.1, Min Sheng N. Rd.,
 Kweishan Hsing, Taoyuan Hsiang, Taiwan

E-mail:eng@eng.com.tw http://www.eng.com.tw

