

Integrated Cabling System



Server standing cabinet 44U 600X1000MM -Flat Vented Front/Back Doors



- ◆ Front **flat perforated door**
- ◆ Back split meshed doors with handle lock
- ◆ Removable solid metal side panels, lock is optional
- ◆ Enhanced 130 degrees operation angle hinge
- ◆ Top&Bottom wire path, hole size can be customized
- ◆ Top can be fixed with 4 fans for cooling.
- ◆ With heavy duty swiveling wheels&adjustable feet
- ◆ RU marked 2.0 mm mounting rails, thickness for body 1.2mm



WWW.WEBIT.CC

- ◆ Disassemble or assemble packing
- ◆ Easily to assemble by air tool
- ◆ Max Static Bearing capacity: 800 KG
- ◆ Protection: IP20
- Complies with ANSI/EIA RS-310-D, IEC297-2, DIN41491; PART1, DIN41494; PART7, ETSI
- Surface Finish: Degrease, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity powder coating
- Color: **RAL9004**

Application

- Telecommunication equipment
- CCTV
- Security and broadcasting
- Active equipment
- DATA CENTER

Integrated Cabling System



SAMPLE gallery : 600*600 mm 42U


When front side opening

Solid metal back door



front flat meshed door

back single/split perforated

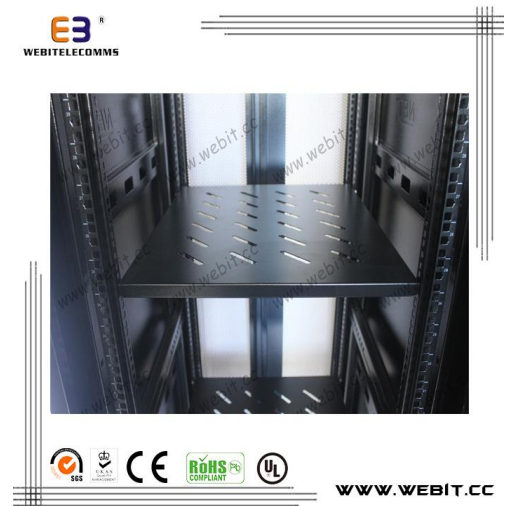

Removable side panels

Marked 19" Rails

Integrated Cabling System




Item NO.	Item	600 wide	800wide	Materials	Treatment	Note
1	Frame	2	2	1.2mm SPCC steel	Powder coating	
2	Front Door	1	1	1.2mm SPCC steel	\	metal border
3	Side Door	2	2	1.2mm SPCC steel	Powder coating	Removable
4	Back Door	2	2	1.2mm SPCC steel	Powder coating	
5	Lock	2	2	\	\	Handle Lock
6	Top cover	1	1	1.2mm SPCC steel	Powder coating	
7	Rear door panel	1	1	1.2mm SPCC steel	Powder coating	
8	Fan unit	1	1	1.2mm SPCC steel	Powder coating	
9	Ac fan	2 or 4	2 or 4	\	\	D>800,4 pcs
10	Bottom panel	1	1	SPCC T=1.2	Powder coating	Optional parts
11	Earthing cable	1	1	Y/G cable	\	25 cm
12	Castors tray	4	4	SPCC T=2.0	Powder coating	
13	Castors	4	4	\	\	
14	Ajustable feet	4	4	Steel	Brass plated	M12
15	Mounting angle	2	2	SPCC T=1.2	Powder coating	
16	19inch rails	4	4	SPCC T=2.0	Powder coating	
17	Vertical C/M	\	2	SPCC T=1.2	Powder coating	Only for 800 W

Integrated Cabling System



Explored view

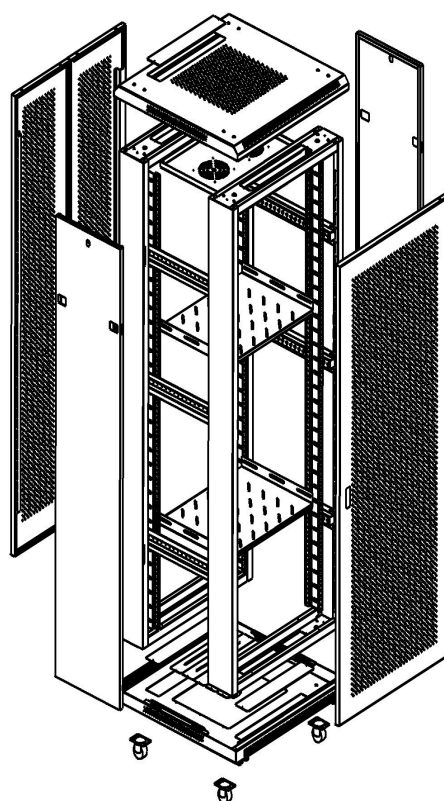


Integrated Cabling System



DISASSEMBLE PACKAG

Package A (Doors)

Front&Rear doors, side panels;

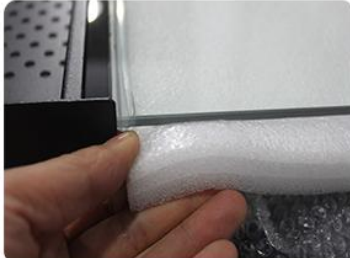

Package B (Frame)

Frame×2



Package C (Top&Bottom panel)

Top&Bottom panel, Screws&cage nuts, Locks,Castors&feet,Fan tray



Remarks: Vertical cable managers(If have) will be packed serpatedly