	Data sheet : Outdoor receiver kits KIT02		Page 1 of 4	
			Version:	1028
			Date:	2010-12-20

# Outdoor Receiver Kit

QN-Kit02




## Company Information:

Company Name:	Quanzhou Qينو Electronics Co., Ltd
Company Address:	5 Floor, Jingda Mansion, DongBin Development Area, Fengze District, Quanzhou City, Fujian Province, P.R. China
Postal Code:	362000
Tel:	+86-595-22569016
Fax:	+86-595-22901208


## Document Information:

Version	Update content	Operator	Date
1012	Initial version		Apr.15, 2011


	Data sheet : Outdoor receiver kits KIT02		Page 2 of 4	
			Version:	1028
			Date:	2010-12-20

## Description:

1. 2 Channels independent set-up
2. Frequency 433.92Mhz
3. Power supply: 9V-24V DC/AC
4. Can learn up to 100 transmitter
5. Relay Spec.: 12A 14 VDC or 7A 120 VAC
6. Fix code technology

	Data sheet : Outdoor receiver kits KIT02		Page 3 of 4	
			Version:	1028
			Date:	2010-12-20


## Programmer Manual:

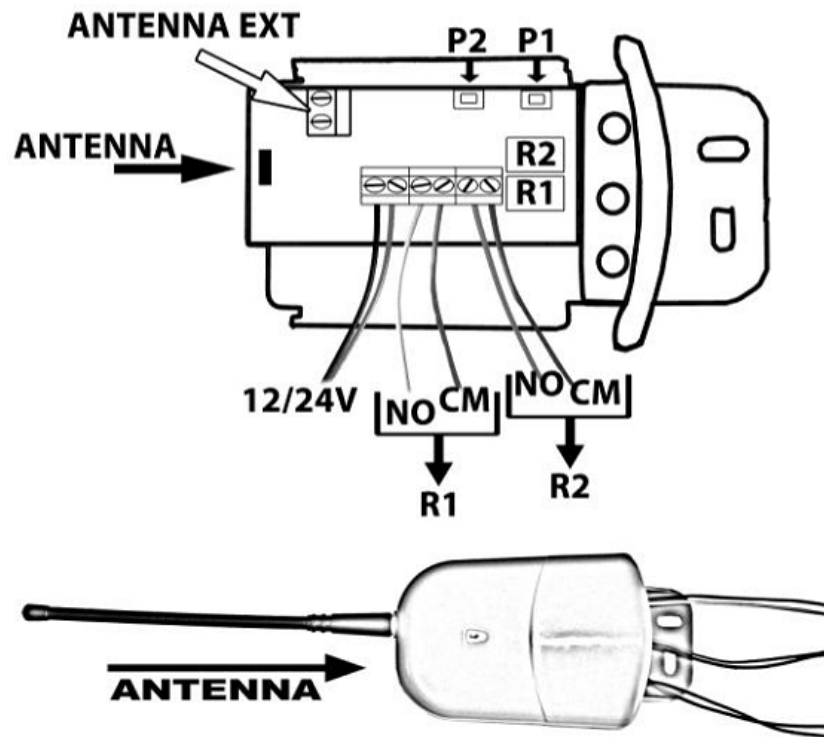

Press the P1:

- 1 time to program R1 in monostable mode
- 2 times to program R2 in monostable mode
- 3 times to program R1 in bistable mode
- 4 times to program R2 in bistable mode

Hold down the key of the radio remote control that you would like to acquire until the led blinks.

	Data sheet : Outdoor receiver kits KIT02		Page 4 of 4	
			Version:	1028
			Date:	2010-12-20

Deleting:

There are two ways of deleting

#### 1.Deleting a single code:

Press P2 for about two seconds(release the key); the LED will light up, press the key on the radio remote control that you want to delete.

#### 2.Deleting all codes acquired:

Press P2 until the LED turns on (about 8 seconds)