

GM-717, High Performance,

Compact, All-In-One

USB GPS Module

Overview

GM-717 is equipped with the latest **u-blox 7** low-power, high-sensitivity engine, antenna, and wire-to-board connector. The all-in-one design allows quick plug and play.

GM-717 supports GPS and GLONASS. It default works with GPS and QZSS.

Based on our experienced design, GM-717 provides not only excellent GPS performance but also quality and delivery assurance..


Applications

- POS / MID / UMPC / Driving Recorder
- Vehicle navigation device
- Tablet PC / Netbook PC / Notebook PC

Features

- Compact, USB GPS all-in-one module
 - 17 x 17 x 6.6 (mm) only with antenna
 - Connect to main board via a 6-pin connector
- Tiny – best solution for size demanding device
 - 15 x 15 x 4 (mm) antenna on top of PCB
 - 17 x 17 x 0.7(mm) PCB
 - 1.9 (mm) high connector under PCB
- Backup power for faster position fix.
- GNSS support: GPS, QZSS (default) and GLONASS
- SBAS (WAAS, EGNOS, MSAS) support
- High sensitivity⁺: -161dBm tracking/-147dBm acquisition
- Up to 10Hz update rate (default 1Hz)

RoHS
Compliant



- OMA SUPL compliant A-GPS support
- Windows **location sensor** support
- Excellent EMI protection

Technical Specifications

Receiver Performance Data⁺

Receiver Type	56-channel u-blox 7 engine GPS & QZSS:L1 C/A,1575.42MHz, GLONASS:L1OF,1598.0625~1605.375MHz SBAS: WAAS, EGNOS, MSAS
Horizontal Position Accuracy	Autonomous:2.5m (GPS), 4m (GLONASS) SBAS: 2.0m (GPS) (CEP, 50%, 24-hour static, -130dBm)
Velocity Accuracy	<0.1 m/s (speed) <0.5° (heading) (50% @ 30 m/s)
Time Pulse Signal Accuracy	RMS: 30ns (GPS), 50ns (GLONASS) 99%: 60ns (GPS), 100ns (GLONASS)
Time To First Fix (TTFF)	Autonomous (All at -130dBm) Hot start 1sec (GPS), 1sec (GLONASS) Warm start 28sec (GPS), 25sec (GLONASS) Cold start 30sec (GPS), 32 sec (GLONASS)
Sensitivity, dBm (Autonomous)	Acquisition: -147 (GPS), -139 (GLONASS) Tracking: -161 (GPS), -158 (GLONASS)
Navigation. Update Rate	Max. 10Hz Default 1Hz
Max. Altitude	50,000 m
Max. Velocity	500 m/s

NaviSys Technology Corp.

Tel : +886-3-5632598

Sales contact: sales@navisys.com.tw

Address: 2F, No.56, Park Ave. II, Science-Based Industrial Park, Hsinchu 300, Taiwan (R.O.C.)

<http://www.navisys.com.tw/>

Fax: +886-3-5632597

Technical support: service@navisys.com.tw

Protocol	NMEA 0183 v2.3(compatible to 3.0)
Support	GGA, GLL, GSA, GSV, RMC, VTG, TXT
Dynamics	< 4g

*** Note. According to IC Spec**

Electrical Data

Power Supply (VCC)	3.1 ~ 5.5 V
Backup power (V_BAT)	1.5 ~ 3.5 V
Power Consumption	36 mA / average tracking 13.5uA / backup power
USB I/O (V)	V _{IH} : 0.7*VCC ~ VCC+0.5 V _{IL} : 0 ~ 0.2*VCC V _{OH} : >= VCC-0.4 V _{OL} <= 0.4
Digital I/O (V)	V _{IH} : 0.7*VCC~VCC+0.5, V _{IL} : 0 ~ 0.2*VCC V _{OH} : >= VCC-0.4, V _{OL} <= 0.4

3	DP	USB positive	I/O
4	DM	USB negative	I/O
5	V_BAT	Backup power (1.5 ~ 3.5V)	Input
6	PWR_CTRL	Module power control High or disconnected: power ON Low: power OFF	Input

Ordering Information

GM-717X,


X=A	Standard module
-----	-----------------

*This document is subject to change without notice.

Environmental Data

Operating temperature	-40 ~ 85°C
Storage temperature	-40 ~ 85°C

Mechanical Data – 17 x 17 x 6.6 (mm)

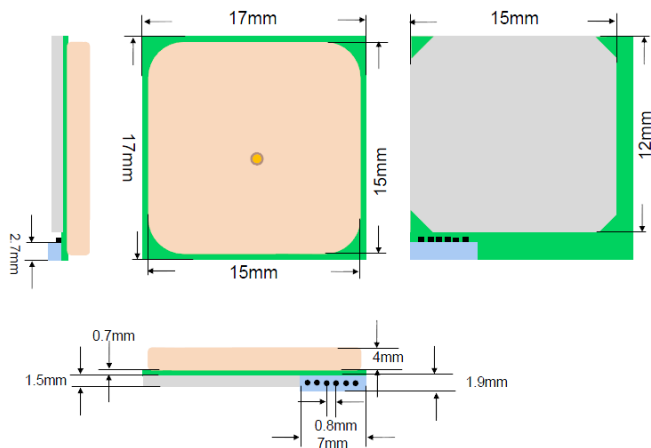

6-pin Interface (USB), pitch 0.8 mm

Pin	Name	Function	I/O
1	GND	Ground	Input
2	VCC	Power supply,	Input

Navisys Technology Corp.

Tel : +886-3-5632598

Sales contact: sales@navisys.com.tw

Address: 2F, No.56, Park Ave. II, Science-Based Industrial Park, Hsinchu 300, Taiwan (R.O.C.)

<http://www.navisys.com.tw/>

Fax: +886-3-5632597

Technical support: service@navisys.com.tw