

- Tinned ,annealed,stranded or solid copper conductor.
- Color -coded Semi-rigid PVC insulation.
- Rated temperature:80°C .Rated voltage:300volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CSA FT1 vertical flamt test
- **Top coated conductor is avaiable**

说明:

- 导体使用单股或绞线裸铜或镀锡铜
- 半硬质PVC绝缘
- 额定温度: 80°C 额定电压: 300Volts
- 使用标准厚度, 易剥, 截断容易。
- 可通过UL VW-1 及 CSA FT1 , 垂直燃烧测试
- 可使用先绞后镀 (TC) 为导体


- Internal wiring in electronic Machine and Electronic Equipments

应用:

- 用于电子机器设备内部配线

Construction:

构造:

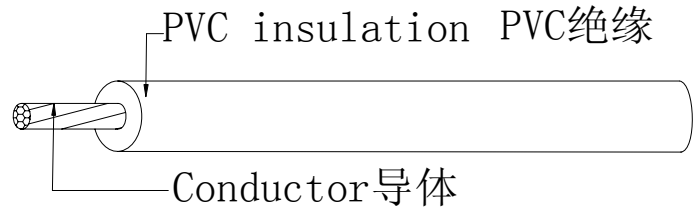

UL Style& CSA Type	Conductor		Insulation Thickness	Overall Diameter	Stand Put-up		Conductor Resistance at 20°C
	AWG	No/mm			mm	mm	
UL1095 CSA AWM I A (Stranded)	30	7/0.102	0.3	0.95	2000	610	381.00
	28	7/0.127	0.3	1.05	2000	610	239.00
	26	7/0.16	0.3	1.15	2000	610	150.00
	24	11/0.16	0.3	1.30	2000	610	94.20
	22	17/0.16	0.3	1.45	2000	610	59.40
	20	21/0.178	0.3	1.65	2000	610	36.70
	18	34/0.178	0.3	1.90	2000	610	23.20
	16	26/0.25	0.3	2.10	2000	610	14.60
UL1095 CSA AWM I A (Solid)	30	1/0.254	0.3	0.90	2000	610	361.00
	28	1/0.32	0.3	1.00	2000	610	227.00
	26	1/0.404	0.3	1.05	2000	610	143.00
	24	1/0.511	0.3	1.20	2000	610	89.30
	22	1/0.643	0.3	1.30	2000	610	56.40
	20	1/0.813	0.3	1.50	2000	610	35.20
	18	1/1.024	0.3	1.70	2000	610	22.20
	16	1/1.29	0.3	1.90	2000	610	14.00