

- Tinned ,annealed,stranded or solid copper conductor.PVC insulation
- Tinned copper wire spiral shield
- PVC jacketed single core
- Use of spiral shield allows for fast and simple termination
- Rated temperature:80°C .Rated voltage:300Vvoltage
- Passes UL VW-1&CSA FT1 vertical flamt test


- For use in recording studios,sound systems and electronic circuits and power adaptor for portable pc

应用:

- 用于录音, 录影设备, 音响系统, 电子电路及手提电脑的变压器

Construction:

构造:

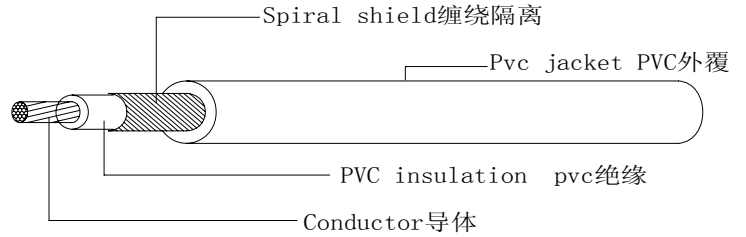

说明:

- 导体使用单股或绞线裸铜或镀锡铜,PVC绝缘
- 镀锡铜线缠绕
- 单芯PVC被覆
- 缠绕隔离
- 额定温度: 80°C 额定电压: 300V
- 可通过UL VW-1 及 CSA FT1 , 垂直燃烧测试

UL Style& CSA Type	Conductor		Insulation Thickness mm	Nom.Dia mm	Spiral shield NO/mm	Jacket Thickness mm	Overall Diameter mm	Conductor Resistance at 20°C Ω/KM
	AWG	No/mm						
UL1347 CSA (Stranded)	30	7/0.102	0.41	1.15	38/0.1	0.41	2.20	381.00
	28	7/0.127	0.41	1.20	40/0.1	0.41	2.30	239.00
	26	7/0.16	0.41	1.25	42/0.1	0.41	2.40	150.00
	24	11/0.16	0.41	1.30	44/0.1	0.41	2.50	94.20
	22	17/0.16	0.41	1.35	46/0.1	0.41	2.60	59.40
	20	21/0.178	0.41	1.40	47/0.1	0.41	2.70	36.70
	18	34/0.178	0.41	1.45	50/0.1	0.41	2.80	23.20
	16	26/0.25	0.41	1.50	52/0.10	0.41	2.90	14.60