


DIN CAST IRON LIFT CHECK VALVE PN16

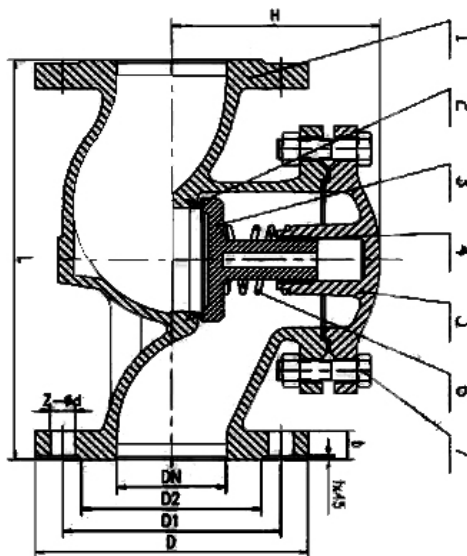

DESCRIPTION:

Available Medium: Water, Steam

Working Temperature: $\cong 200^{\circ}\text{C}$

Face to Face Dimensions: DIN3202 F1

Flange Dimensions: DIN2533

DIMENSIONS(MM)									
DN	L	D	D1	D2	b	Z-φd	f	H	KG
20	150	105	75	58	16	4-14	2	73	3.3
25	160	115	85	68	16	4-14	2	75	4.1
32	180	140	100	78	18	4-18	2	84	6.3
40	200	150	110	88	18	4-18	3	95	7.8
50	230	165	125	102	20	4-18	3	109	11.1
65	290	185	145	122	20	4-18	3	129	16
80	310	200	160	138	22	8-18	3	153	26.2
100	350	220	180	158	24	8-18	3	170	35.9
125	400	250	210	188	26	8-18	3	200	51.2
150	480	285	240	212	26	8-23	3	253	77.8
200	600	340	295	268	30	12-23	3	398	133.9
250	730	405	355	320	32	12-27	3	485	177

MATERIALS

ITEM	PARTS NAME	MATERIAL
1	BODY	CAST IRON
2	SEAT RING	BRASS/STAINLESS STEEL
3	DISC	CAST IRON +BRASS/ STAINLESS STEEL
4	VALVE GUIDE	BRASS
5	BONNET	CAST IRON
6	SPRING	STAINLESS STEEL
7	BOLT/NUT	CARBON STEEL