


抽芯铆钉规格 TABLE OF BLIND RIVET

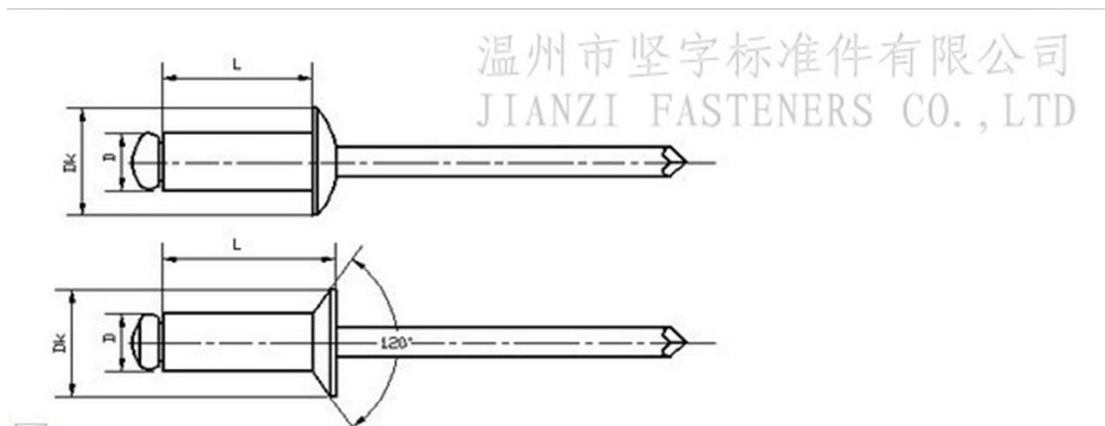

JIANZI FASTENERS CO., LTD

D(mm)	Hole Dia.(mm)	DK(mm)	Tensile N(min)	Shear N(min)
2.4	2.5-2.6	4.8	350	250
3.2	3.3-3.4	6.0	700	500
4.0	4.1-4.2	8.0	1200	850
4.8	4.9-5.0	9.5(14、16)	1700	1200
6.4	6.5-6.6	12.7	3150	2200

铆接厚度参数表: RIVET THICKNESS PARAMETER TABLE

Unit: mm

温州市坚字标准件有限公司 JIANZI STANDARD PARTS CO., LTD

DxL	Grip Range	DxL	Grip Range	DxL	Grip Range	DxL	Grip Range	DxL	Grip Range
2.4*5	0.5~2.5	3.2*5	~2						
2.4*7	2.5~4.5	3.2*6.4	2~4	4.0*6	0.5~2.5	4.8*6.4	1~3		
2.4*9	4.5~6.5	3.2*8.0	4~6	4.0*8	2.5~4.5	4.8*8	3~5		
2.4*11	6.5~8.5	3.2*10	6~8	4.0*10	4.5~6.5	4.8*10	5~7	6.4*10	0.5~0.4
		3.2*12	8~10	4.0*13	7.5~9.5	4.8*12	7~9	6.4*13	3.0~7.0
		3.2*14	10~12	4.0*16	10.5~12.5	4.8*14	9~12	6.4*15	5.0~9.0
		3.2*16	12~14	4.0*18	12.5~14.5	4.8*18	12~14	6.4*18	8.0~12.0
		3.2*19	14~16	4.0*20	14.5~16.5	4.8*20	14~16	6.4*20	10.0~14.0
						4.8*16	9~11		
						4.8*22	15~17		
						4.8*25	20~22	6.4*26	16.0~20.0
						4.8*28	22~24	6.4*28	18.0~22.0
						4.8*30	24~26	6.4*30	20.0~24.0