

- Tinned ,annealed, stranded or solid copper conductor.PVC insulation
- Tinned copper wire spiral shield
- PVC jacketed single core
- Use of spiral shield allows for fast and simple termination
- Rated temperature:105℃.Rated voltage:600 voltage
- Passes UL VW-1&CSA FT1 vertical flamt test

说明:

- 导体使用单股或绞线裸铜或镀锡铜,PVC绝缘
- 镀锡铜线缠绕
- 单芯PVC被覆
- 缠绕隔离
- 额定温度: 105℃ 额定电压: 600V
- 可通过UL VW-1 及 CSA FT1 , 垂直燃烧测试


- For use in recording studios,sound systems and electronic circuits and power adaptor for portable pc

应用:

- 用于录音, 录影设备, 音响系统, 电子电路及手提电脑的变压器

Construction:

构造:

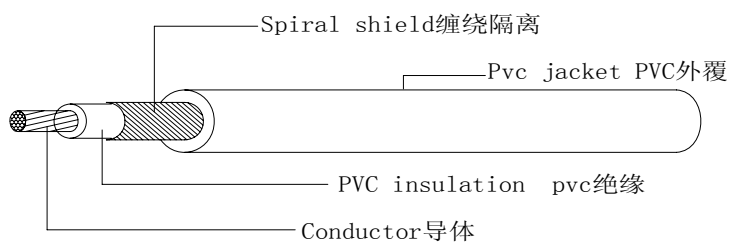

UL Style& CSA Type	Conductor		Insulation Thickness mm	Nom.Dia mm	Spiral shield NO/mm	Jacket Thickness mm	Overall Diameter mm	Conductor Resistance at 20℃ Ω/KM
	AWG	No/mm						
UL1120 CSA (Stranded)	28	7/0.127	0.76	2.00	55/0.12	0.76	3.80	239.00
	26	7/0.16	0.76	2.10	58/0.12	0.76	4.00	150.00
	24	11/0.16	0.76	2.20	60/0.12	0.76	4.20	94.20
	22	17/0.16	0.76	2.40	65/0.12	0.76	4.40	59.40
	20	21/0.178	0.76	2.50	68/0.12	0.76	4.50	36.70
	18	34/0.178	0.76	2.80	76/0.12	0.76	4.70	23.20
	16	26/0.25	0.76	3.10	84/0.12	0.76	5.00	14.60
	14	41/0.25	0.76	3.50	95/0.12	0.76	5.50	8.96
	12	65/0.25	0.76	4.00	107/0.12	0.76	5.8	5.64
10	105/0.25	0.76	4.60	124/0.12	0.76	6.5	3.55	