

Product Description:

- Tinned, annealed, stranded or solid copper conductor.
- PP PE OR TPE insulation
- MPPE-PE jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature: 80°C. Rated voltage: 30V
- Passes UL VW-1 & CUL FT1 vertical flame test

说明:

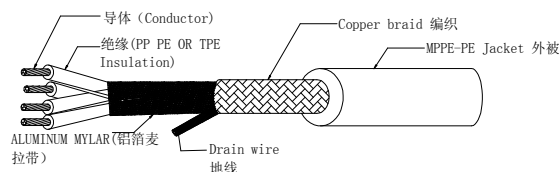
- 导体使用单股或绞线裸铜或镀锡铜。
- PP PE 或 TPE 绝缘
- MPPE-PE 被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：80°C 额定电压：30V
- 可通过 UL VW-1 及 CUL FT1，垂直燃烧测试

Applications:

- Internal wiring in Class 2 circuits and both ends are terminated in connectors.

应用:

- 2级电路及两端的内部布线终止连接。

Construction:**构造:**

UL Style & CUL Type	Cores	Conductor		Insulation Thickness	Nom. Dia	Shield Coverage	Jacket Thickness	Overall Diameter	Conductor Resistance at 20°C
		AWG	No/mm	mm	mm	%	mm	mm	Ω /KM
UL21456 CUL (Stranded)	2C	30	7/0.100	0.23	0.80	>=65	0.38	3.60	381.00
		28	7/0.127	0.23	0.90	>=65	0.38	3.80	239.00
		26	7/0.16	0.23	1.00	>=65	0.38	3.90	150.00
		24	11/0.16	0.23	1.10	>=65	0.38	4.00	94.20
		22	17/0.16	0.23	1.30	>=65	0.38	4.40	59.40
		20	21/0.178	0.23	1.50	>=65	0.38	4.80	36.70
		18	34/0.178	0.23	1.80	>=65	0.38	5.40	23.20
		16	26/0.25	0.23	2.00	>=65	0.38	4.60	14.60
UL21456 CUL (Stranded)	3C	30	7/0.100	0.23	0.80	>=65	0.38	3.80	381.00
		28	7/0.127	0.23	0.90	>=65	0.38	4.00	239.00
		26	7/0.16	0.23	1.00	>=65	0.38	4.20	150.00
		24	11/0.16	0.23	1.10	>=65	0.38	4.40	94.20
		22	17/0.16	0.23	1.30	>=65	0.38	5.00	59.40
		20	21/0.178	0.23	1.50	>=65	0.38	5.30	36.70
		18	34/0.178	0.23	1.80	>=65	0.38	5.90	23.20
		16	26/0.25	0.23	2.00	>=65	0.38	4.60	14.60
UL21456 CUL (Stranded)	4C	30	7/0.100	0.23	0.80	>=65	0.38	4.00	381.00
		28	7/0.127	0.23	0.90	>=65	0.38	4.20	239.00
		26	7/0.16	0.23	1.00	>=65	0.38	4.50	150.00
		24	11/0.16	0.23	1.10	>=65	0.38	4.90	94.20
		22	17/0.16	0.23	1.30	>=65	0.38	5.20	59.40
		20	21/0.178	0.23	1.50	>=65	0.38	5.70	36.70
UL21456 CUL (Stranded)	5C	30	7/0.100	0.23	0.80	>=65	0.38	4.20	381.00
		28	7/0.127	0.23	0.90	>=65	0.38	4.40	239.00
		26	7/0.16	0.23	1.00	>=65	0.38	4.50	150.00
		24	11/0.16	0.23	1.10	>=65	0.38	4.90	94.20
		22	17/0.16	0.23	1.30	>=65	0.38	5.50	59.40
UL21456 CUL (Stranded)	6C	30	7/0.100	0.23	0.80	>=65	0.38	4.40	381.00
		28	7/0.127	0.23	0.90	>=65	0.38	4.80	239.00
		26	7/0.16	0.23	1.00	>=65	0.38	5.20	150.00
		24	11/0.16	0.23	1.10	>=65	0.38	5.50	94.20