



Fx-US04A ADSL POTS Splitter For CPE Side



★ Compact package, includes connectors for ease of installation


★ Design for Glite Application

★ 100 mA DCI Loop Current Capacity

Specifications

POTS Port Impedance	600 Ω	POTS Tip and Ring DC Voltage	0~105V
Insertion Loss @1KHz	0.3dB Max	DC Resistance each Line	12.5 Ω Max
Insertion distortion @200~4 KHz	±1.0dB Max	Return Loss @300Hz~500Hz	14 dB Min
Attenuation @30~450KHz	30dB Min	@500Hz~2KHz	18 dB Min
@450KHz~1.104MHz	55dB Min	@2KHz~3.4KHz	14 dB Min
Longitudinal Balance @200Hz~3K	50dB Min	Isolation resistance tip/ring	10MΩ Min

Wiring & Dimension Schematic

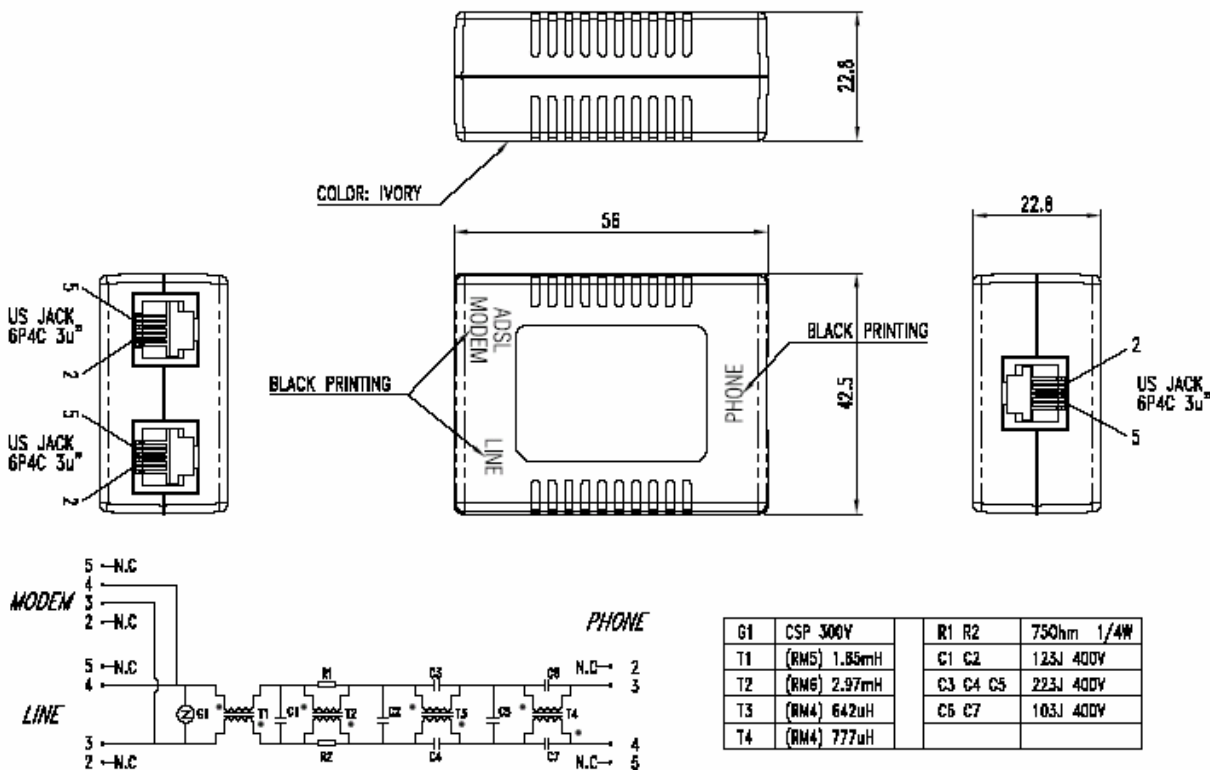

Head Office & Factory

SHAN-SIA DEVELOPMENT INDUSTRY AREA, HENG-LI TOWN, DONGGUAN CITY, GUANGDONG PROVINCE, CHINA

Tel: +86-769-3791376/7/8/9

Postal: 523467

Http: www.dgfuxin.com

Fax: +86-769-3713728