

Product Description:

- Tinned ,annealed, stranded or solid copper conductor.TPE XL-PE insulation
- Tinned copper wire spiral shield
- TPE jacketed single core
- Use of spiral shield allows for fast and simple termination
- Rated temperature:105°C.Rated voltage:300V
- Passes UL VW-1&CUL FT1 vertical flame test

说明:

- 导体使用单股或绞线裸铜或镀锡铜,TPE XL-PE绝缘
- 镀锡铜线缠绕
- 单芯TPE被覆
- 编织隔离
- 额定温度：105℃额定电压：300V
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试

Applications:


- Internal wiring

应用:

- 内部布线。

Construction:

构造:

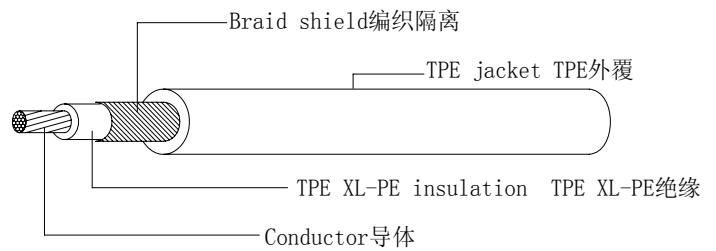

UL Style& CUL Type	Conductor		Insulation Thickness mm	No.of core	Shielded Coverage	Jacket Thickness	Overall Diameter	Conductor Resistance at 20°C
	AWG	No/mm			%	mm	mm	Ω/KM
UL10733 CUL (Stranded)	30	7/0.10	0.38	1	≥65	0.38	2.40	381.00
	28	7/0.127	0.38	1	≥65	0.38	2.50	239.00
	26	7/0.16	0.38	1	≥65	0.38	2.60	150.00
	24	11/0.16	0.38	1	≥65	0.38	2.80	94.20
	22	17/0.16	0.38	1	≥65	0.38	3.00	59.40
	20	21/0.178	0.38	1	≥65	0.38	3.50	36.70
	18	34/0.178	0.38	1	≥65	0.38	4.20	23.20
	16	26/0.25	0.38	1	≥65	0.38	4.40	14.60
	14	41/0.25	0.38	1	≥65	0.38	5.00	8.96