

# CDD系列宽视野全电动堆垛车

CDD SERIES WIDE SIGHT FULL-ELECTRIC STACKER

## 主要特点

MAIN CHARACTER

- 1、美国CURTIS控制器，质量可靠，性能优异，使整车性能达到最佳状态
  - 2、进口液压站，低噪音，小振动，密封性能好，确保起升下降平稳可靠
  - 3、高强度车身设计和“H”型钢门架，坚固耐用，使用寿命长
  - 4、配置大容量牵引电池，电量持久，并选用智能充电器，德国REMA充电插件，充电方便快捷
  - 5、可选配人性化的护臂结构和折叠式踏板，关闭操作方便
  - 6、可选配EPS电动转向系统，使操作更轻便。
1. Top quality controller system from CURTIS, high reliability, ensures best performance in different states
  2. WINNER hydraulic power pack, low noise, few vibration and excellent leak tightness, ensures smooth lifting
  3. High-strength frame design and "H" shaped mast, strong and durable, ensures longer service life
  4. Configure with 240Ah large capacity battery, intelligent charger, REMA plug from Germany
  5. Optional humanized design of handrail and folded pedal, easy operating
  6. Optional EPS electric power steering system, light and nimble operation.

## 可选配置 OPTIONAL



F型手把  
F Type Handle




踏板扶手  
Pedal and Handrail




交流电机  
AC Driving Motor



电动转向系统  
Electric Power Steering

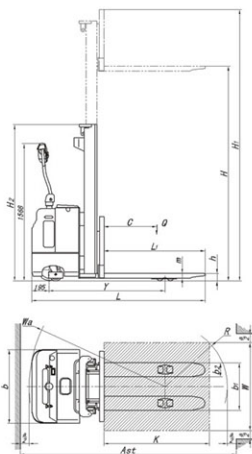

BT12/BT15/BT20

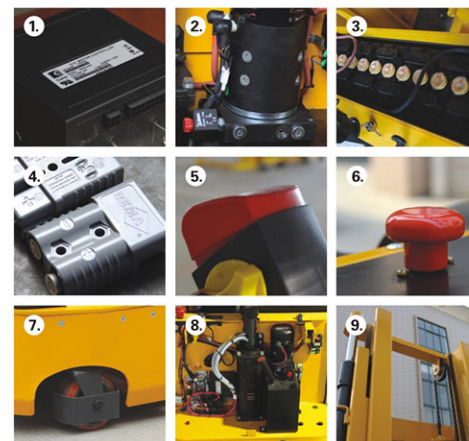

- 1、美国CURTIS控制器
  - 2、WINNER液压泵站
  - 3、240Ah大容量蓄电池
  - 4、德国REMA充电插件
  - 5、紧急反向行驶功能，按下此按钮，车子可反向行驶
  - 6、紧急情况下可按下红色断电开关，切断所有电源，车子立即停止
  - 7、平衡轮带护罩，保证操作者安全
  - 8、超大维护保养空间，打开后罩后内部部件一览无余
  - 9、宽视野门架，使操作者的视野更加开阔
1. CURTIS controller from America
  2. WINNER pump station from Taiwan
  3. 240Ah large capacity battery
  4. REMA plug from Germany
  5. Reverse button, press this button, the truck will travel in reverse
  6. Press the red button in an emergency, cut down all the power, stop the truck
  7. Balance wheel with cover, protect the operator
  8. Large maintenance room
  9. Wide view mast design, make the operator has a fine view

## 技术参数

TECHNICAL DATA

特性 Identification	产品型号 Model		CDD15					
	配置号 Config-code	标准型 Standard type	B12/B15/B20					
驱动形式 Drive Unit	带踏板扶手 With pedal and handrail		BT12/BT15/BT20					
驾驶方式 Operation type	步行式 Pedestrian / 站驾式 Standing							
额定载重 Load capacity	Q	kg	1200/1500/2000					
载荷中心 Load center	C	mm	600					
总长 Overall length	L	mm	1970					
总宽 Overall width	b	mm	940	940	940	940	940	
总高 Overall height	H2	mm	1800	2025	2125	2225	2325	
起升高度 Lift height	H	mm	2450	2900	3100	3300	3500	
作业时最大高度 Max working height	H1	mm	3094	3544	3744	3944	4144	
货叉最小离地高度 Lowered fork height	h	mm	90					
货叉尺寸 Fork dimensions	L1 x b2 x m	mm	1150 x 160 x 56					
货叉外宽 Maximum fork width	b1	mm	540/680					
轴距 Wheelbase	Y	mm	1319					
转弯半径 Turning radius	Wa	mm	1560					
性能 Performance	行驶速度 Travel speed	满载 Loaded	Km/h	5.0(B12)/4.8(B15)/5.3(B20)				
		空载 Unloaded	Km/h	6.0(B12)/6.0(B15)/6.4(B20)				
	提升速度 Lift speed	满载 Loaded	mm/s	105(B12)/95(B15)/83(B20)				
		空载 Unloaded	mm/s	144(B12)/144(B15)/170(B20)				
下降速度 Lowering speed	满载 Loaded	mm/s	94(B12)/98(B15)/120(B20)					
	空载 Unloaded	mm/s	120(B12)/120(B15)/160(B20)					
制动方式 Brake type	电磁制动 Electric-magnetic							
电机 Electric Motor	驱动电机功率 Drive motor power	B12/B15	KW	1.2				
		B20	KW	1.5 AC				
	提升电机功率 Lift motor power	B12/B15	KW	2.0				
		B20	KW	3.0				
蓄电池容量/电压 Battery capacity/voltage	Ah/V	240/24						
重量 Weight	自重(不含电池)	B12/B15	kg	730	758	770	782	794
	Weight without battery	B20	kg	875	897	910	919	932
	电池重量 Battery weight	kg	235					

注：最小堆垛通道Ast的计算请参附录 Note: Min. stacking aisle width(Ast), please refer to Appendix