

RA-DC8025(80x80x25mm)

DESIGN FEATURES


- ※BEARING SYSTEM:SLEEVE BEARING & BALL BEARING
- ※IMPELLER:PLASTIC WITH FIBER GLASS FILED UL 94V-0
- ※HOUSING:PLASTIC WITH FIBER GLASS FILED UL 94V-0
- ※MOTOR:BRUSHLESS DC
- ※CONNECTING:WIRE LEADS
- RED WIRE POSITIVE(+)
- BLACK WIRE NEGATIVE(-)
- ※SPEED: H : HIGH SPEED TYPE
- M : MEDIUM SPEED TYPE
- L : LOW SPEED TYPE



DATA SHEET

MODEL NO	VOLTAGE (V)	CURRENT (A)	POWER (W)	SPEED (RPM)	AIR (CFM)	STATIC PRESSURE (mm-H ₂ O)	NOISE dB(A)
DC8025L	12	0.12	1.44	2200	27.8	2.3	25
	24	0.09	2.16	2200	27.8	2.3	25
DC8025M	12	0.16	1.96	2600	33	4.1	32
	24	0.11	2.64	2600	33	4.1	32
DC8025H	12	0.20	2.40	3200	40	5.6	35
	24	0.13	3.12	3200	40	5.6	35

DIMENSIONS DRAWING (mm)

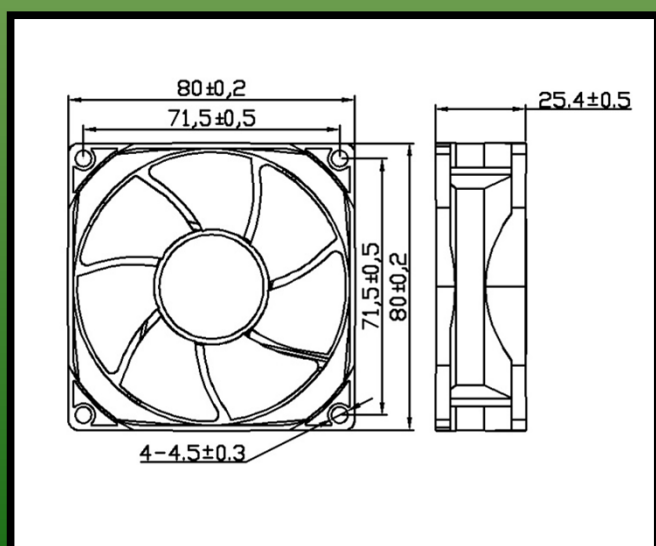

P & Q CURVE (AT RATED VOLTAGE)

