


○ Function



○ Purchase option

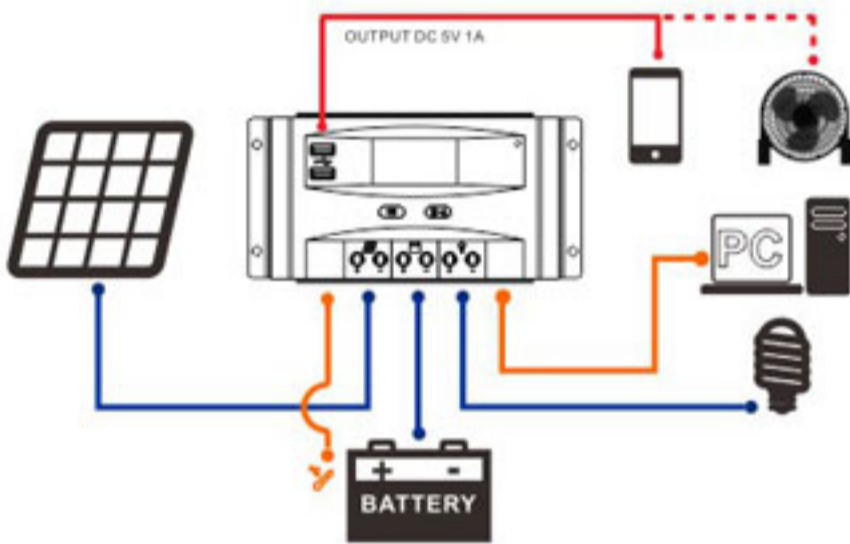

Model: TK20DU-10A 12V/24V
TK20DU-20A 12V/24V



Rated Voltage: 12V/24V Auto identified
Rated Current: 10A, 20A
USB Port: 5V, 1A × 2

Packing info: 40pcs/carton
Carton size: 535mm×425mm×200mm
Gross weight: 15Kg
Volume: 0.045m³



Model: TK30DU-30A 12V/24V



Rated Voltage: 12V/24V Auto identified
Rated Current: 30A
USB Port: 5V, 1A × 2
LCD screen size: 2.2"

Packing info: 30pcs/carton
Carton size: 535mm×425mm×200mm
Gross weight: 15Kg
Volume: 0.046m³



Model: TK40DU-40A 12V/24V
TK4048D-40A 48V

Rated Voltage: 12V/24V Auto identified or 48V
Rated Current: 40A
USB Port: 5V, 1A × 2
LCD screen size: 2.6"
Temperature sensor port: ×1
Communication port: RJ45(Optional)

Packing info: 30pcs/carton
Carton size: 605mm×440mm×200mm
Gross weight: 16Kg
Volume: 0.054m³



Model: TK50D-50A 12V/24V
TK5048D-50A 48V
TK60D-60A 12V/24V
TK6048D-60A 48V

Rated Voltage: 12V/24V Auto identified or 48V
Rated Current: 50A, 60A

LCD screen size: 2.6"
Temperature sensor port: ×1
Communication port: RJ45(Optional)

Packing info: 24pcs/carton
Carton size: 545mm×415mm×190mm
Gross weight: 14Kg(50A), 17Kg(60A)
Volume: 0.043m³



Farm
Solar Generation System




Off-grid
Home Solar System



Rv, Boat & Field
Power Supply Solar System

○ Function

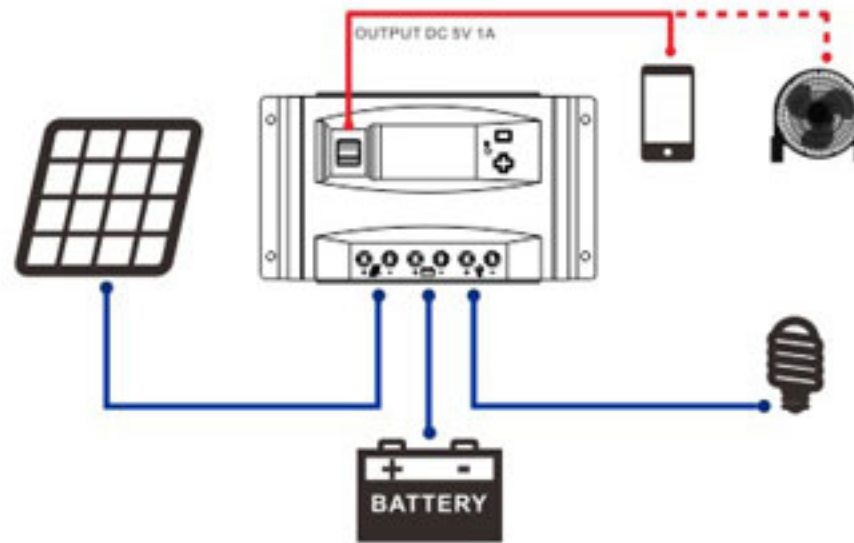

○ Purchase option



Model: TK20DU-10A 12V/24V
TK20DU-20A 12V/24V



Rated Voltage: 12V/24V Auto identified
Rated Current: 10A, 20A
USB Port: 5V, 1A x 2

Packing info: 40pcs/carton
Carton size: 535mm×425mm×200mm
Gross weight: 15Kg
Volume: 0.045m³



Model: TK30DU-30A 12V/24V



Rated Voltage: 12V/24V Auto identified
Rated Current: 30A
USB Port: 5V, 1A x 2
LCD screen size: 2.2"

Packing info: 30pcs/carton
Carton size: 535mm×425mm×200mm
Gross weight: 15Kg
Volume: 0.046m³



Model: TK40DU-40A 12V/24V
TK4048D-40A 48V

Rated Voltage: 12V/24V Auto identified or 48V
Rated Current: 40A
USB Port: 5V, 1A x 2
LCD screen size: 2.6"
Temperature sensor port: x1
Communication port: RJ45(Optional)

Packing info: 30pcs/carton
Carton size: 605mm×440mm×200mm
Gross weight: 16Kg
Volume: 0.054m³



Model: TK50D-50A 12V/24V
TK5048D-50A 48V
TK60D-60A 12V/24V
TK6048D-60A 48V

Rated Voltage: 12V/24V Auto identified or 48V
Rated Current: 50A, 60A

LCD screen size: 2.6"
Temperature sensor port: x1
Communication port: RJ45(Optional)

Packing info: 24pcs/carton
Carton size: 545mm×415mm×190mm
Gross weight: 14Kg(50A), 17Kg(60A)
Volume: 0.043m³



Farm
Solar Generation System



Off-grid
Home Solar System



Rv, Boat & Field
Power Supply Solar System

○ Function



LCD

LCD display



**12/24V
AUTO**

12V/24V
Auto




PWM

PWM



**Simple button
operation**

Simple button
operation



SOC

Protections



**Working
mode of Load**

Working
mode of Load



Battery

Battery type



**Remote
monitoring
and control**

Remote
monitoring
and control



**Parameters
adjustable**

Parameters
adjustable



Ah

Accumulated
ampere hours



**Temperature
compensation**

Temperature
compensation



Vivid, real-time LCD shows all the working statements



Bigger connection port & Reserved communication port



Heat dissipation efficiency increased by 50% with newly designed AL alloy plate



System connection diagram showing solar panel, controller, battery, and load (PC, light bulb) connections.



Product image showing the green and black solar controller unit.

○ Purchase option



Model: TK20DU-10A 12V/24V
TK20DU-20A 12V/24V



Rated Voltage: 12V/24V Auto identified
Rated Current: 10A, 20A
USB Port: 5V, 1A x 2

Packing info: 40pcs/carton
Carton size: 535mm x 425mm x 200mm
Gross weight: 15Kg
Volume: 0.045m³



Model: TK30DU-30A 12V/24V



Rated Voltage: 12V/24V Auto identified
Rated Current: 30A
USB Port: 5V, 1A x 2
LCD screen size: 2.2"

Packing info: 30pcs/carton
Carton size: 535mm x 425mm x 200mm
Gross weight: 15Kg
Volume: 0.046m³



Model: TK40DU-40A 12V/24V
TK4048D-40A 48V

Rated Voltage: 12V/24V Auto identified or 48V
Rated Current: 40A
USB Port: 5V, 1A x 2
LCD screen size: 2.6"
Temperature sensor port: x1
Communication port: RJ45(Optional)

Packing info: 30pcs/carton
Carton size: 605mm x 440mm x 200mm
Gross weight: 16Kg
Volume: 0.054m³



Model: TK50D-50A 12V/24V
TK5048D-50A 48V
TK60D-60A 12V/24V
TK6048D-60A 48V

Rated Voltage: 12V/24V Auto identified or 48V
Rated Current: 50A, 60A
LCD screen size: 2.6"
Temperature sensor port: x1
Communication port: RJ45(Optional)

Packing info: 24pcs/carton
Carton size: 545mm x 415mm x 190mm
Gross weight: 14Kg(50A), 17Kg(60A)
Volume: 0.043m³



Farm
Solar Generation System



Off-grid
Home Solar System



Rv, Boat & Field
Power Supply Solar System