

# CQD系列站驾式前移式电动叉车

## CQD SERIES STANDING TYPE REACH TRUCK

### 主要特点 MAIN CHARACTER


1. 美国CURTIS交流控制器，质量可靠，性能优异，使整车性能达到最佳状态
2. WINNER液压站，低噪音，小振动，密封性能好，确保起升下降平稳可靠
3. 交流驱动电机，免维护，提供强大动力，具有更强的满载爬坡能力
4. 高强度车身设计，特殊压制工艺制造的“C”型钢门架，坚固耐用，使用寿命长
5. 采用立式驱动，使电机、刹车等的检测、维修直接方便
6. 配置大容量牵引电池，电量持久，并选用智能充电器，德国REMA充电插件，充电方便快捷
7. EPS电动转向系统，转向轻便
8. 可选配折叠式踏板，具有缓震功能，可消除操作者在行驶过程中路面给予的冲击
9. 可选配人性化的护臂结构，开闭操作方便，并具备较强的抗撞击力，真正起到护臂作用
1. Top quality AC controller system from CURTIS, high reliability, ensures best performance in different states
2. WINNER hydraulic power pack, low noise, few vibration and excellent leak tightness, ensures smooth lifting.
3. AC traveling motor, maintenance-free, provides stronger power and climbing capability
4. High-strength frame design and "C" shaped mast, strong and durable, ensures longer service life
5. Vertical motor designing, ensures inspection and maintenance of motor and brake system conveniently
6. Configure with 240Ah large capacity battery, intelligent charger, REMA plug from Germany
7. EPS electric power steering system, turning lightly
8. Optional folded pedal, with buffering function, avoid shake while traveling
9. Optional humanized design of handrail, protect the operator when operating



AZ10/AZ13/AZ15





AZT10/AZT13/AZT15

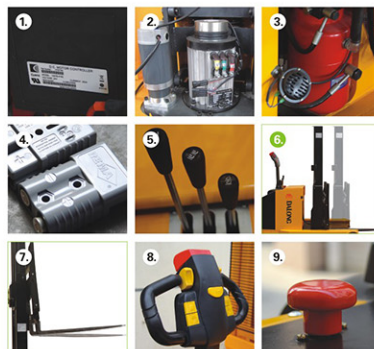

1. 美国CURTIS控制器
2. 交流立式驱动，带电转向
3. WINNER液压泵站
4. 德国REMA充电插件
5. 操纵杆控制货叉和门架的移动，操作方便
6. 门架前后移动功能
7. 货叉前倾后仰功能
8. 人性化设计的操作手柄，带紧急反向行驶按钮
9. 紧急情况下可按下红色断电开关，切断所有电源，车子立即停止

1. CURTIS controller from America
2. Vertical AC traveling and steering motor, maintenance conveniently
3. WINNER pump station from Taiwan
4. REMA plug from Germany
5. The levers control moves of forks and mast, easy operation
6. Mast can move forward and backward
7. Forks can tilt forward and backward
8. Humanized design of handle, with red reverse button
9. Press the red button in an emergency, cut down all the power, stop the truck



### 技术参数 TECHNICAL DATA

特性 Identification	产品型号 Model		CQD10											
	配置号 Config-code	无踏板 Without pedal	AZ10/AZ13		AZ15									
驱动形式 Drive Unit	带踏板 With pedal		AZT10/AZT13 AZT15											
	驱动形式 Drive Unit		电动 Electric											
额定载重 Load capacity	Q kg		1000/1300		1500									
	C mm		500											
基本尺寸 Dimension	L mm		1900		2015									
	b mm		1000		1080									
	H2 mm		1840		2240		2140		1840		2240		2140	
	L2 mm		550											
	H mm		2500		3300		4500		2500		3300		4500	
	H1 mm		3431		4231		5535		3431		4231		5535	
	H3 mm		200											
	L1 x b2 x m mm		900 x 100 x 35											
	b1 mm		230-670可调(Adjustable)		230-610可调(Adjustable)									
	α/β °		3/5											
电机 Electric Motor	m1 mm		60											
	Wa mm		1485		1600									
	KW		2.0		2.0									
	KW		0.2		0.2									
重量 Weight	Ah/V		240/24		300/24									
	kg		120/135/8		125/114/8		137/8/1535		1418		1468		1595	
kg		235		275										