



Category

- SWITCH
- SOCKET
- INDICATOR
- SENSOR
- ELECTRO-MODULE
- BREAKER
- FUSE HOLDER
- FUSE
- ENCODER
- POTENTIOMETER
- CONNECTOR
- WIRE HARNESS
- NEW PRODUCT

Products Search

Search



OUR PRODUCT

Home » Our Product » RL-BI002, RL-BI001 » RL-BI002, RL-BI001

INDICATOR / SNAP IN TYPE

RL-BI002, RL-BI001
LED battery indicator/battery fuel gauge
for dc powered equipment

12V to 72V battery indicator voltage range
Battery status indicator with 1 red, 2 yellow, 7 green
Automatic identification of the battery is not properly
charged
Key switch connection or direct connection
Sealed protection to IP65 rating



ZOOM IN

PDF Download Get Information


Print this page

Feature


- Battery type: Lead-acid battery
- Voltage rage: DC 12V/24V, 36V, 48V/72V
- LED display mode: 10 Segment LED Bar Graph
- LED color selection: 1 red, 2 yellow, 7 green
- Display mode: Single display
- Discharge mode: Gear down, default: 155s
- Charging mode: Gear up, default: 200s
- Voltage display accuracy: < +/- 5%
- Operating voltage: DC 9~85V
- Working current: ≤20mA nominal
- Working temperature: -20°C ~ 65°C
- Application: Fork lifts, golf carts, floor care equipment, and any other battery powered equipment

Specification

Panel cutout




RL-BI002

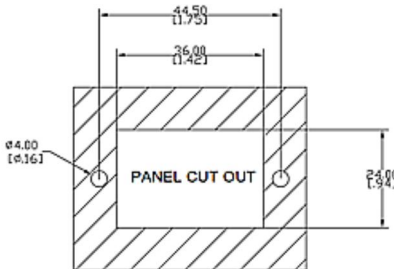

RL-BI001

Terminal spec



RL-BI002



RL-BI001

2/24V	Power input positive terminal and connect positive pole of power supply, range DC 9~28V
36V	Power input positive terminal and connect positive pole of power supply, range DC 15~45V
48/72V	Power input positive terminal and connect positive pole of power supply, range DC 20~85V
-	Power input negative terminal and connect negative pole of power supply
C	Key switch · connect the positive pole of battery

Battery level

Battery type (customizable)		Battery level									
		1	2	3	4	5	6	7	8	9	10
Lead Acid	12V	10.38	10.59	10.80	11.01	11.22	11.43	11.64	11.85	12.30	>12.3
	24V	20.76	21.18	21.60	22.02	22.44	22.86	23.28	23.70	24.60	>24.6
	36V	31.14	31.77	32.40	33.03	33.66	34.29	34.92	35.55	36.90	> 36.9
	48V	41.52	42.36	43.20	44.04	44.88	45.72	46.56	47.40	49.20	> 49.2
	72V	62.28	63.54	64.80	66.06	67.32	68.58	69.84	71.10	73.80	> 73.8

Note:

1. Display: Battery display mode: 10 LED lights, 1 red, 2 yellow and 7 green.
2. Power function:
- Automatically identify the current remaining power when powered on.
 - Power delay function (can be customized: discharge step by step, delay 155S to drop a step, charge step by step, delay 200S to rise a step.
 - Different battery types can be customized.




Downlaod operating instructions



Item




RL-BI002





RL-BI001-1

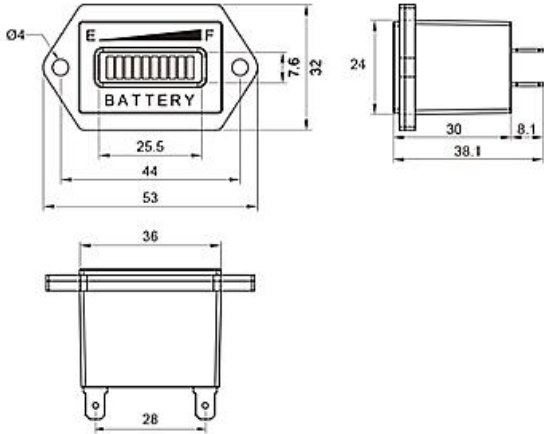

 BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.

Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved