MICROCHIP

PIC16F87XA

28/40/44-Pin Enhanced Flash Microcontrollers

Devices Included in this Data Sheet:

- PIC16F873A
- PIC16F874A
- PIC16F876A
- PIC16F877A

High-Performance RISC CPU:

- Only 35 single-word instructions to learn
- All single-cycle instructions except for program branches, which are two-cycle
- Operating speed: DC – 20 MHz clock input
  DC – 200 ns instruction cycle
- Up to 8K x 14 words of Flash Program Memory, Up to 368 x 8 bytes of Data Memory (RAM), Up to 256 x 8 bytes of EEPROM Data Memory
- Pinout compatible to other 28-pin or 40/44-pin PIC16CXXX and PIC16FXXX microcontrollers

Peripheral Features:

- Timer0: 8-bit timer/counter with 8-bit prescaler
- Timer1: 16-bit timer/counter with prescaler, can be incremented during Sleep via external crystal/clock
- Timer2: 8-bit timer/counter with 8-bit period register, prescaler and postscaler
- Two Capture, Compare, PWM modules
  - Capture is 16-bit, max. resolution is 12.5 ns
  - Compare is 16-bit, max. resolution is 200 ns
  - PWM max. resolution is 10-bit
- Synchronous Serial Port (SSP) with SPI (Master mode) and I^2C™ (Master/Slave)
- Universal Synchronous Asynchronous Receiver Transmitter (USART/SCI) with 9-bit address detection
- Parallel Slave Port (PSP) – 8 bits wide with external $\overline{RD}$, $\overline{WR}$ and $\overline{CS}$ controls (40/44-pin only)
- Brown-out detection circuitry for Brown-out Reset (BOR)

Analog Features:

- 10-bit, up to 8-channel Analog-to-Digital Converter (A/D)
- Brown-out Reset (BOR)
- Analog Comparator module with:
  - Two analog comparators
  - Programmable on-chip voltage reference (V_{REF}) module
  - Programmable input multiplexing from device inputs and internal voltage reference
  - Comparator outputs are externally accessible

Special Microcontroller Features:

- 100,000 erase/write cycle Enhanced Flash program memory typical
- 1,000,000 erase/write cycle Data EEPROM memory typical
- Data EEPROM Retention > 40 years
- Self-reprogrammable under software control
- In-Circuit Serial Programming™ (ICSP™) via two pins
- Single-supply 5V In-Circuit Serial Programming
- Watchdog Timer (WDT) with its own on-chip RC oscillator for reliable operation
- Programmable code protection
- Power saving Sleep mode
- Selectable oscillator options
- In-Circuit Debug (ICD) via two pins

CMOS Technology:


- Low-power, high-speed Flash/EEPROM technology
- Fully static design
- Wide operating voltage range (2.0V to 5.5V)
- Commercial and Industrial temperature ranges
- Low-power consumption

Device	Program Memory		Data SRAM (Bytes)	EEPROM (Bytes)	I/O	10-bit A/D (ch)	CCP (PWM)	MSSP		USART	Timers 8/16-bit	Comparators
	Bytes	# Single Word Instructions						SPI	Master I^2C			
PIC16F873A	7.2K	4096	192	128	22	5	2	Yes	Yes	Yes	2/1	2
PIC16F874A	7.2K	4096	192	128	33	8	2	Yes	Yes	Yes	2/1	2
PIC16F876A	14.3K	8192	368	256	22	5	2	Yes	Yes	Yes	2/1	2
PIC16F877A	14.3K	8192	368	256	33	8	2	Yes	Yes	Yes	2/1	2


© 2001-2013 Microchip Technology Inc.

Pin Diagrams


28-Pin PDIP, SOIC, SSOP

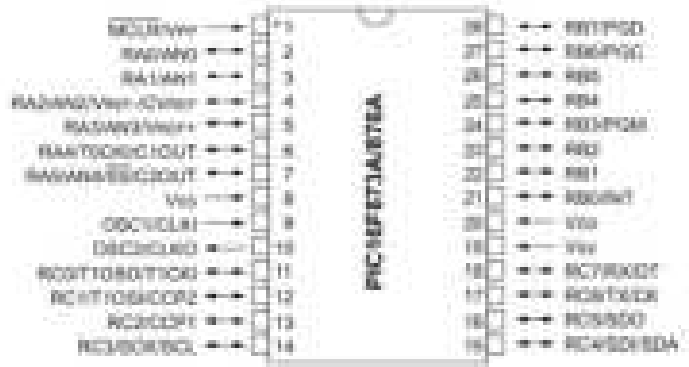

28-Pin QFN

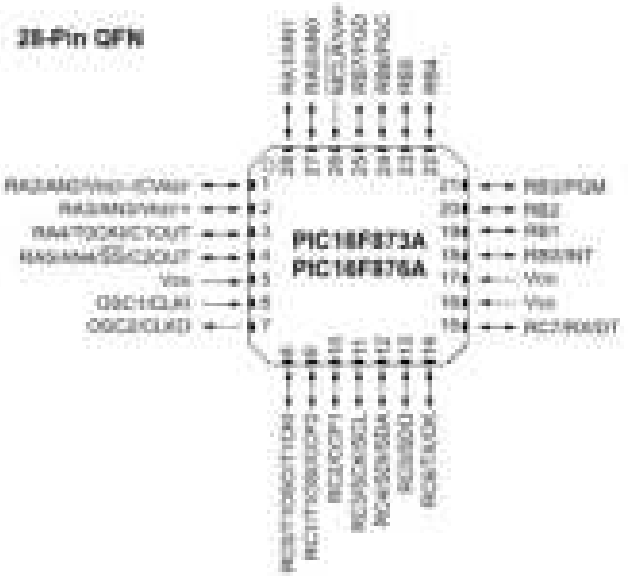

44-Pin QFN

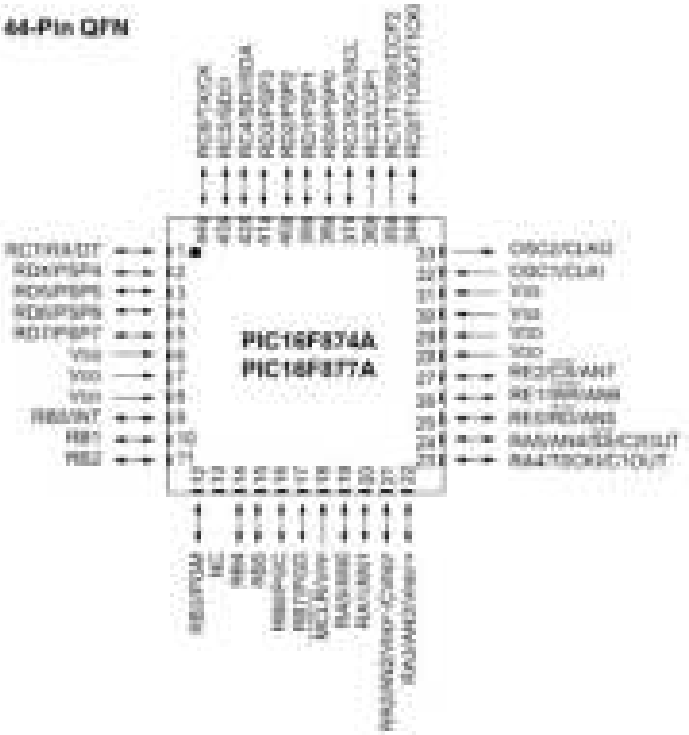

© 2001-2013 Microchip Technology Inc.

Pin Diagrams (Continued)

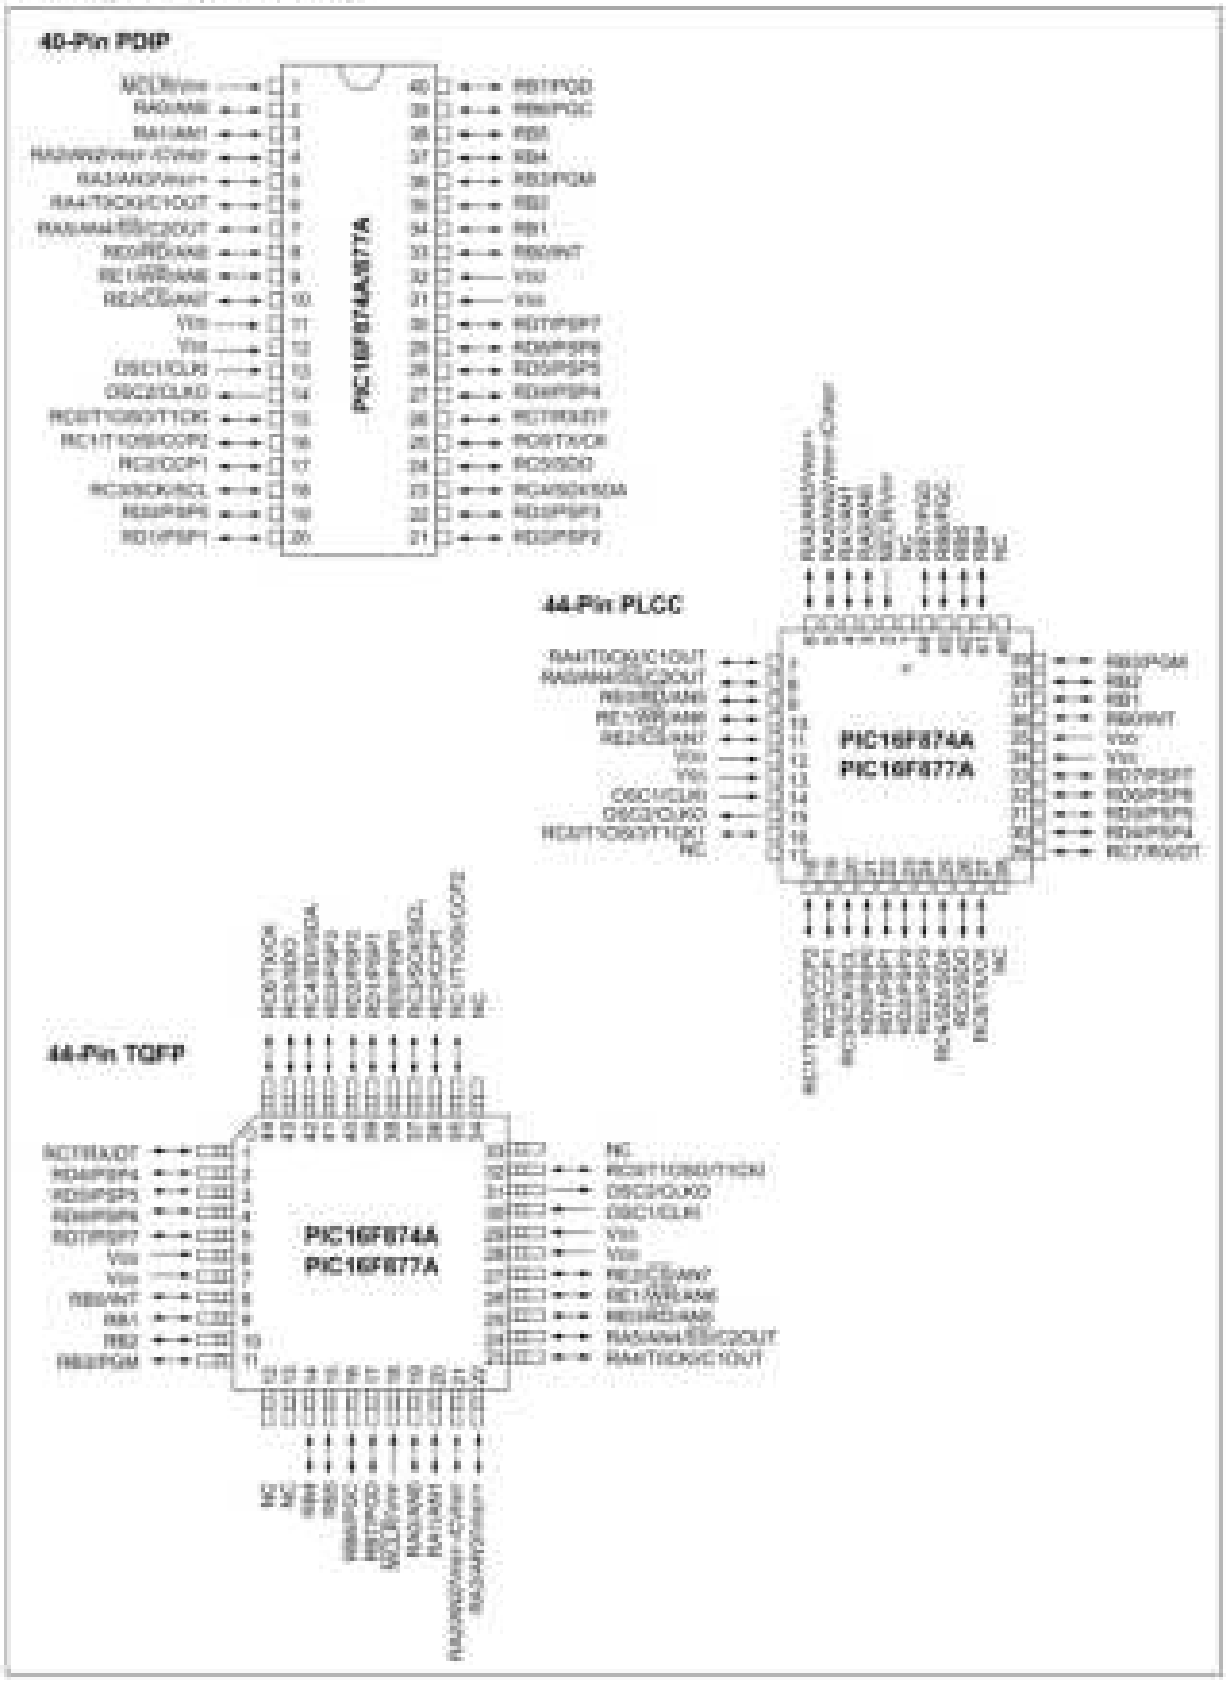


Table of Contents

1.0 Device Overview 5
2.0 Memory Organization 15
3.0 Data EEPROM and Flash Program Memory 33
4.0 I/O Ports 41
5.0 Timer0 Module 53
6.0 Timer1 Module 57
7.0 Timer2 Module 61
8.0 Capture/Compare/PWM Modules 63
9.0 Master Synchronous Serial Port (MSSP) Module 71
10.0 Addressable Universal Synchronous Asynchronous Receiver Transmitter (USART) 111
11.0 Analog-to-Digital Converter (A/D) Module 127
12.0 Comparator Module 135
13.0 Comparator Voltage Reference Module 141
14.0 Special Features of the CPU 143
15.0 Instruction Set Summary 159
16.0 Development Support 167
17.0 Electrical Characteristics 173
18.0 DC and AC Characteristics Graphs and Tables 197
19.0 Packaging Information 209
Appendix A: Revision History 219
Appendix B: Device Differences 219
Appendix C: Conversion Considerations 220
Index 221
On-Line Support 229
Systems Information and Upgrade Hot Line 229
Reader Response 230
PIC16F87XA Product Identification System 231

TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at **docerrors@mail.microchip.com** or fax the **Reader Response Form** in the back of this data sheet to (480) 792-4150. We welcome your feedback.

Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

http://www.microchip.com

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000A is version A of document DS30000).

Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; http://www.microchip.com
- Your local Microchip sales office (see last page)
- The Microchip Corporate Literature Center; U.S. FAX: (480) 792-7277

When contacting a sales office or the literature center, please specify which device, revision of silicon and data sheet (include literature number) you are using.

Customer Notification System

Register on our Web site at **www.microchip.com/cn** to receive the most current information on all of our products.

© 2001-2013 Microchip Technology Inc.

1.0 DEVICE OVERVIEW

This document contains device specific information about the following devices:

- PIC16F873A
- PIC16F874A
- PIC16F876A
- PIC16F877A

PIC16F873A/876A devices are available only in 28-pin packages, while PIC16F874A/877A devices are available in 40-pin and 44-pin packages. All devices in the PIC16F87XA family share common architecture with the following differences:

- The PIC16F873A and PIC16F874A have one-half of the total on-chip memory of the PIC16F876A and PIC16F877A
- The 28-pin devices have three I/O ports, while the 40/44-pin devices have five
- The 28-pin devices have fourteen interrupts, while the 40/44-pin devices have fifteen
- The 28-pin devices have five A/D input channels, while the 40/44-pin devices have eight
- The Parallel Slave Port is implemented only on the 40/44-pin devices

The available features are summarized in Table 1-1. Block diagrams of the PIC16F873A/876A and PIC16F874A/877A devices are provided in Figure 1-1 and Figure 1-2, respectively. The pinouts for these device families are listed in Table 1-2 and Table 1-3.


Additional information may be found in the PIC® Mid-Range Reference Manual (DS33023), which may be obtained from your local Microchip Sales Representative or downloaded from the Microchip web site. The Reference Manual should be considered a complementary document to this data sheet and is highly recommended reading for a better understanding of the device architecture and operation of the peripheral modules.

TABLE 1-1: PIC16F87XA DEVICE FEATURES

Key Features	PIC16F873A	PIC16F874A	PIC16F876A	PIC16F877A
Operating Frequency	DC – 20 MHz	DC – 20 MHz	DC – 20 MHz	DC – 20 MHz
Resets (and Delays)	POR, BOR (PWRT, OST)	POR, BOR (PWRT, OST)	POR, BOR (PWRT, OST)	POR, BOR (PWRT, OST)
Flash Program Memory (14-bit words)	4K	4K	8K	8K
Data Memory (bytes)	192	192	368	368
EEPROM Data Memory (bytes)	128	128	256	256
Interrupts	14	15	14	15
I/O Ports	Ports A, B, C	Ports A, B, C, D, E	Ports A, B, C	Ports A, B, C, D, E
Timers	3	3	3	3
Capture/Compare/PWM modules	2	2	2	2
Serial Communications	MSSP, USART	MSSP, USART	MSSP, USART	MSSP, USART
Parallel Communications	—	PSP	—	PSP
10-bit Analog-to-Digital Module	5 input channels	8 input channels	5 input channels	8 input channels
Analog Comparators	2	2	2	2
Instruction Set	35 Instructions	35 Instructions	35 Instructions	35 Instructions
Packages	28-pin PDIP 28-pin SOIC 28-pin SSOP 28-pin QFN	40-pin PDIP 44-pin PLCC 44-pin TQFP 44-pin QFN	28-pin PDIP 28-pin SOIC 28-pin SSOP 28-pin QFN	40-pin PDIP 44-pin PLCC 44-pin TQFP 44-pin QFN

© 2001-2013 Microchip Technology Inc.

FIGURE 1-1: PIC16F873A/876A BLOCK DIAGRAM

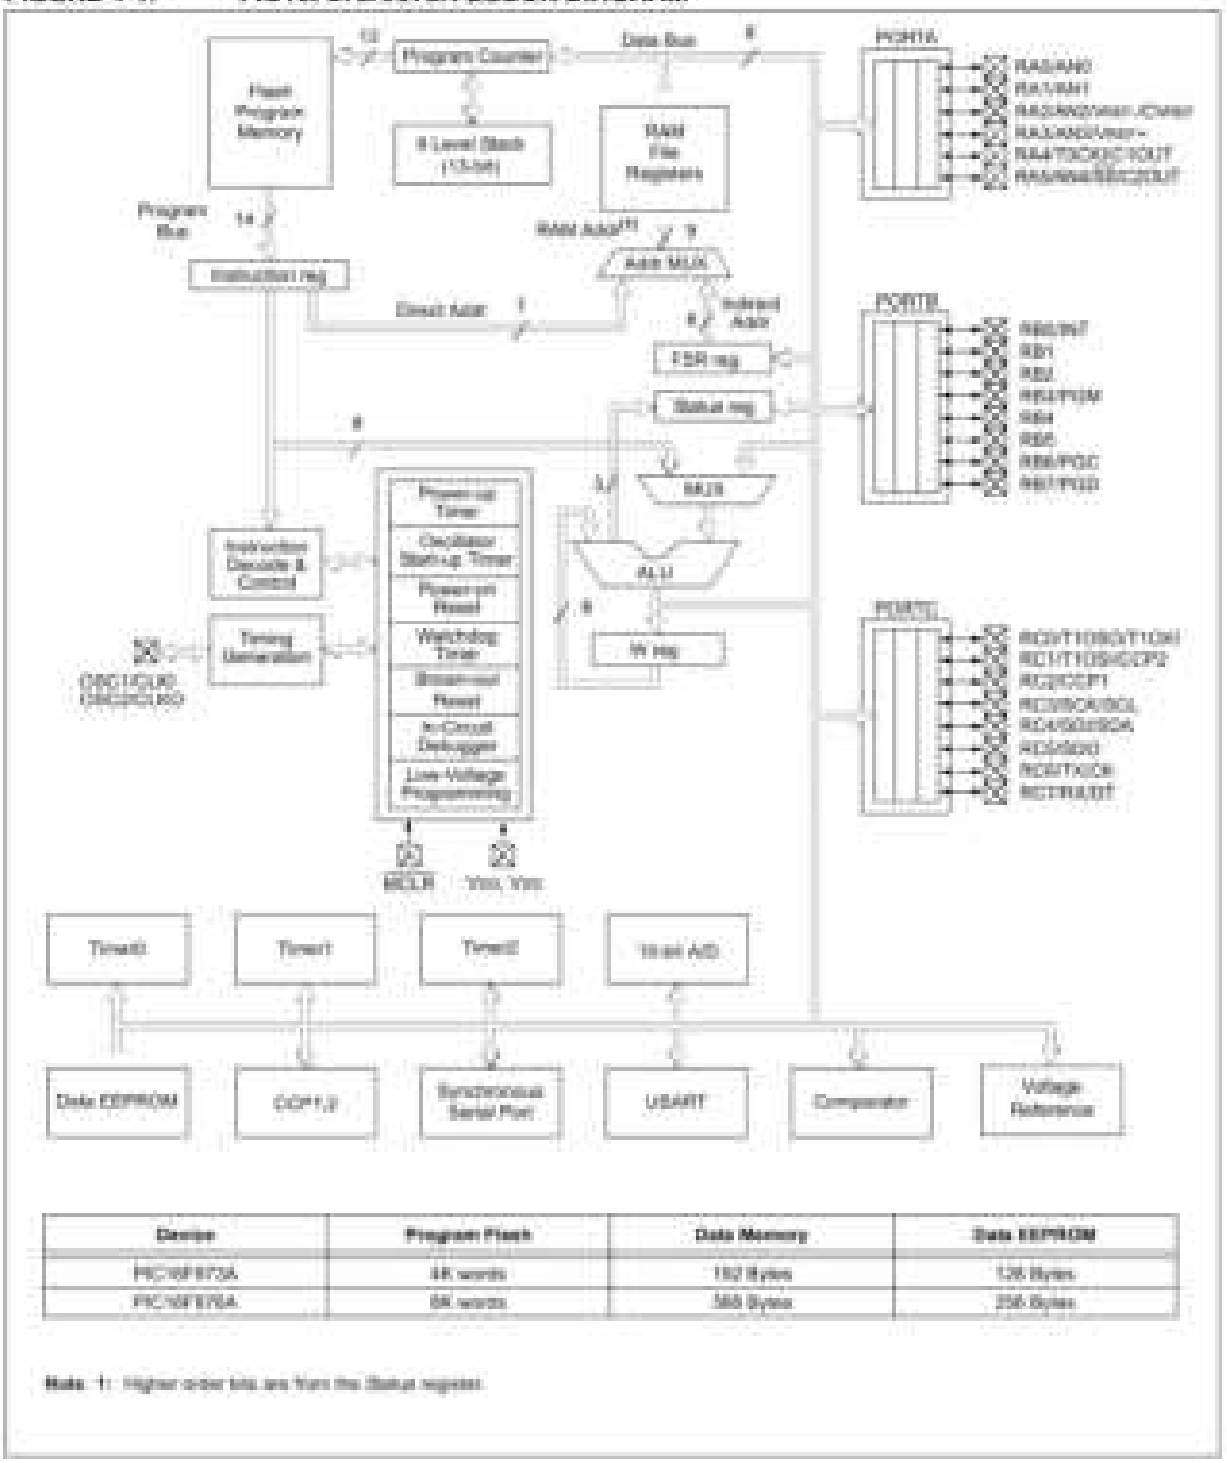


Device	Program Flash	Data Memory	Data EEPROM
PIC16F873A	4K words	192 Bytes	128 Bytes
PIC16F876A	8K words	368 Bytes	256 Bytes

Note 1: Higher order bits are from the Status register.

© 2001-2013 Microchip Technology Inc.

FIGURE 1-2: PIC16F874A/877A BLOCK DIAGRAM

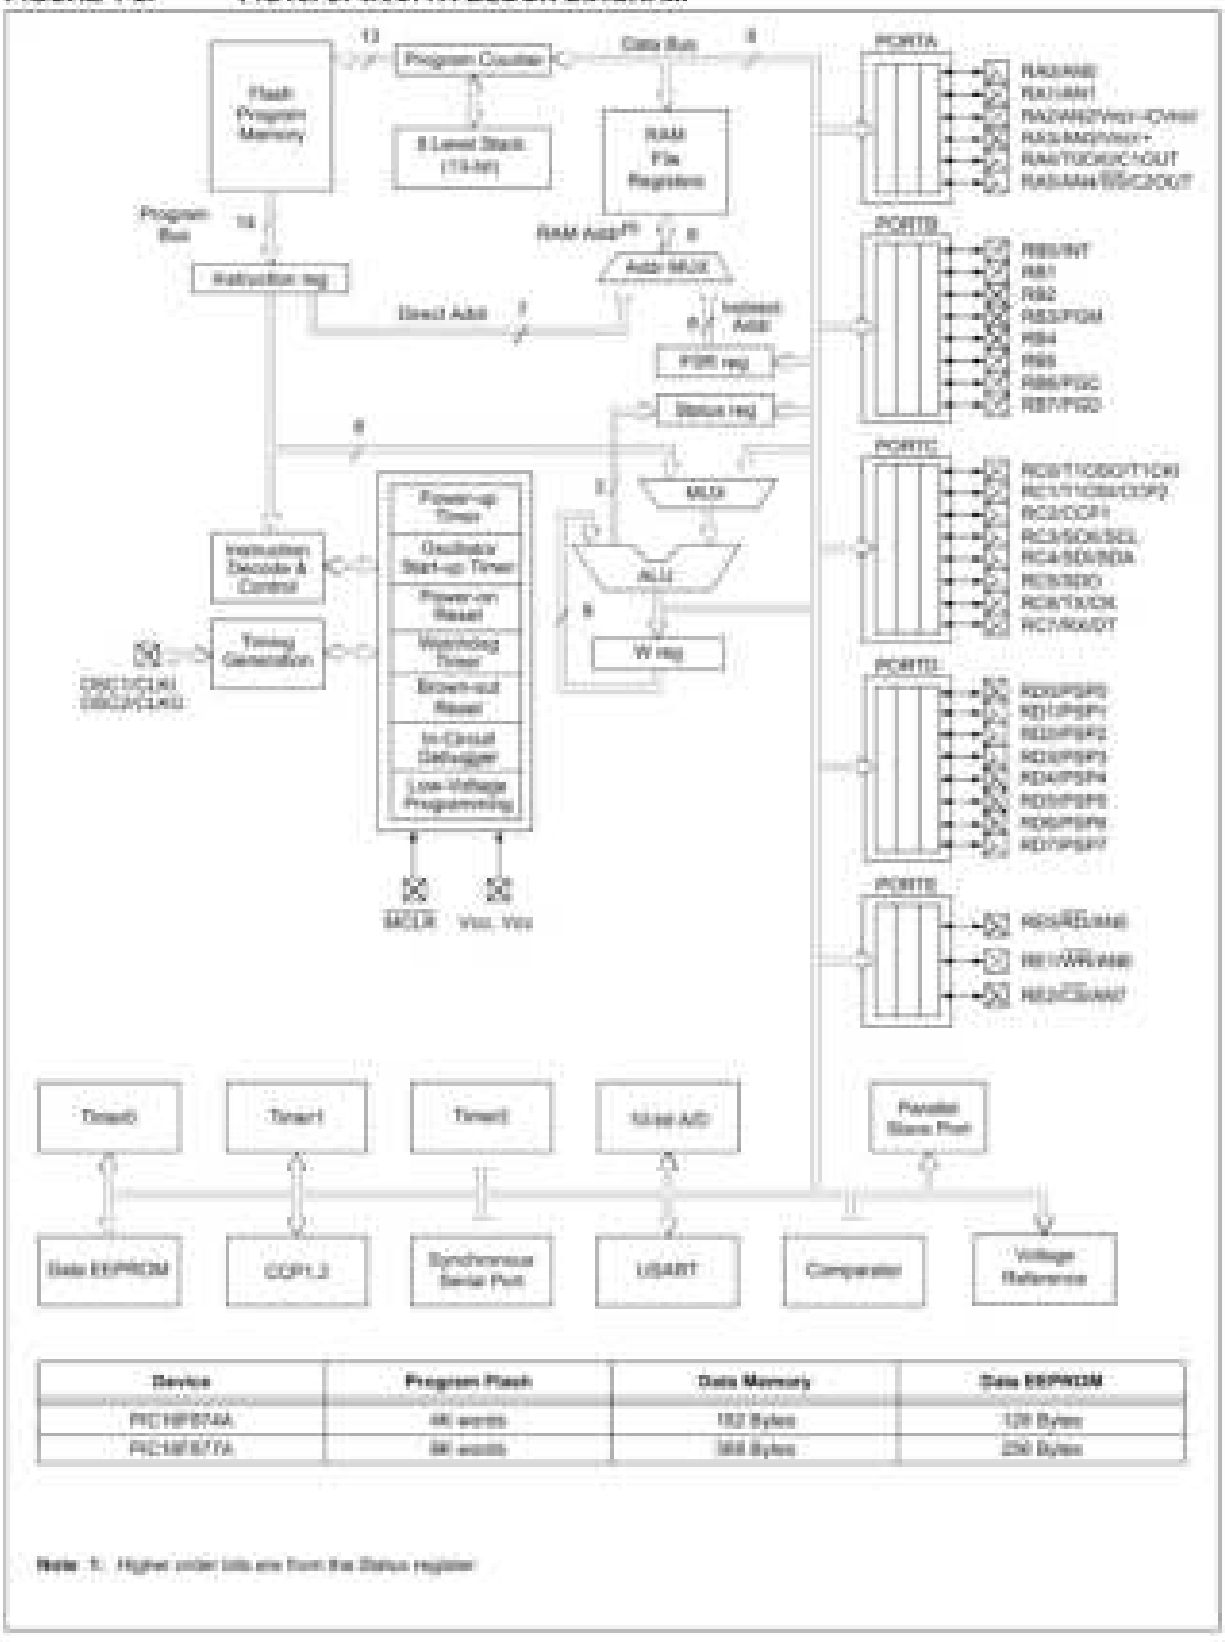

Device	Program Flash	Data Memory	Data EEPROM
PIC16F874A	4K words	192 Bytes	128 Bytes
PIC16F877A	8K words	368 Bytes	256 Bytes

Note 1: Higher order bits are from the Status register.

TABLE 1-2: PIC16F873A/876A PINOUT DESCRIPTION

Pin Name	PDIP, SOIC, SSOP Pin#	QFN Pin#	I/O/P Type	Buffer Type	Description
OSC1/CLKI	9	6		ST/CMOS(3)	Oscillator crystal or external clock input.
OSC1			I		Oscillator crystal input or external clock source input. ST buffer when configured in RC mode; otherwise CMOS.
CLKI			I		External clock source input. Always associated with pin function OSC1 (see OSC1/CLKI, OSC2/CLKO pins).
OSC2/CLKO	10	7		—	Oscillator crystal or clock output.
OSC2			O		Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode.
CLKO			O		In RC mode, OSC2 pin outputs CLKO, which has 1/4 the frequency of OSC1 and denotes the instruction cycle rate.
$\overline{MCLR}$/VPP	1	26		ST	Master Clear (input) or programming voltage (output).
$\overline{MCLR}$			I		Master Clear (Reset) input. This pin is an active low Reset to the device.
VPP			P		Programming voltage input.
					PORTA is a bidirectional I/O port.
RA0/AN0	2	27		TTL	
RA0			I/O		Digital I/O.
AN0			I		Analog input 0.
RA1/AN1	3	28		TTL	
RA1			I/O		Digital I/O.
AN1			I		Analog input 1.
RA2/AN2/VREF-/CVREF	4	1		TTL	
RA2			I/O		Digital I/O.
AN2			I		Analog input 2.
VREF-			I		A/D reference voltage (Low) input.
CVREF			O		Comparator VREF output.
RA3/AN3/VREF+	5	2		TTL	
RA3			I/O		Digital I/O.
AN3			I		Analog input 3.
VREF+			I		A/D reference voltage (High) input.
RA4/T0CKI/C1OUT	6	3		ST	
RA4			I/O		Digital I/O – Open-drain when configured as output.
T0CKI			I		Timer0 external clock input.
C1OUT			O		Comparator 1 output.
RA5/AN4/$\overline{SS}$/C2OUT	7	4		TTL	
RA5			I/O		Digital I/O.
AN4			I		Analog input 4.
$\overline{SS}$			I		SPI slave select input.
C2OUT			O		Comparator 2 output.

Legend: I = input O = output I/O = input/output P = power
— = Not used TTL = TTL input ST = Schmitt Trigger input

Note 1: This buffer is a Schmitt Trigger input when configured as the external interrupt.
2: This buffer is a Schmitt Trigger input when used in Serial Programming mode.
3: This buffer is a Schmitt Trigger input when configured in RC Oscillator mode and a CMOS input otherwise.

© 2001-2013 Microchip Technology Inc.

TABLE 1-2: PIC16F873A/876A PINOUT DESCRIPTION (CONTINUED)

Pin Name	PDIP, SOIC, SSOP Pin#	QFN Pin#	I/O/P Type	Buffer Type	Description
					PORTB is a bidirectional I/O port. PORTB can be software programmed for internal weak pull-ups on all inputs.
RB0/INT	21	18		TTL/ST(1)	
RB0			I/O		Digital I/O.
INT			I		External interrupt.
RB1	22	19	I/O	TTL	Digital I/O.
RB2	23	20	I/O	TTL	Digital I/O.
RB3/PGM	24	21		TTL	
RB3			I/O		Digital I/O.
PGM			I		Low-voltage (single-supply) ICSP programming enable pin.
RB4	25	22	I/O	TTL	Digital I/O.
RB5	26	23	I/O	TTL	Digital I/O.
RB6/PGC	27	24		TTL/ST(2)	
RB6			I/O		Digital I/O.
PGC			I		In-circuit debugger and ICSP programming clock.
RB7/PGD	28	25		TTL/ST(2)	
RB7			I/O		Digital I/O.
PGD			I/O		In-circuit debugger and ICSP programming data.
					PORTC is a bidirectional I/O port.
RC0/T1OSO/T1CKI	11	8		ST	
RC0			I/O		Digital I/O.
T1OSO			O		Timer1 oscillator output.
T1CKI			I		Timer1 external clock input.
RC1/T1OSI/CCP2	12	9		ST	
RC1			I/O		Digital I/O.
T1OSI			I		Timer1 oscillator input.
CCP2			I/O		Capture2 input, Compare2 output, PWM2 output.
RC2/CCP1	13	10		ST	
RC2			I/O		Digital I/O.
CCP1			I/O		Capture1 input, Compare1 output, PWM1 output.
RC3/SCK/SCL	14	11		ST	
RC3			I/O		Digital I/O.
SCK			I/O		Synchronous serial clock input/output for SPI mode.
SCL			I/O		Synchronous serial clock input/output for I²C mode.
RC4/SDI/SDA	15	12		ST	
RC4			I/O		Digital I/O.
SDI			I		SPI data in.
SDA			I/O		I²C data I/O.
RC5/SDO	16	13		ST	
RC5			I/O		Digital I/O.
SDO			O		SPI data out.
RC6/TX/CK	17	14		ST	
RC6			I/O		Digital I/O.
TX			O		USART asynchronous transmit.
CK			I/O		USART1 synchronous clock.
RC7/RX/DT	18	15		ST	
RC7			I/O		Digital I/O.
RX			I		USART asynchronous receive.
DT			I/O		USART synchronous data.
Vss	8, 19	5, 6	P	—	Ground reference for logic and I/O pins.
VDD	20	17	P	—	Positive supply for logic and I/O pins.

Legend: I = input O = output I/O = input/output P = power
— = Not used TTL = TTL input ST = Schmitt Trigger input

Note 1: This buffer is a Schmitt Trigger input when configured as the external interrupt.
2: This buffer is a Schmitt Trigger input when used in Serial Programming mode.
3: This buffer is a Schmitt Trigger input when configured in RC Oscillator mode and a CMOS input otherwise.

TABLE 1-3: PIC16F874A/877A PINOUT DESCRIPTION

Pin Name	PDIP Pin#	PLCC Pin#	TQFP Pin#	QFN Pin#	I/O/P Type	Buffer Type	Description
OSC1/CLKI	13	14	30	32		ST/CMOS(3)	Oscillator crystal or external clock input.
OSC1					I		Oscillator crystal input or external clock source input. ST buffer when configured in RC mode; otherwise CMOS.
CLKI					I		External clock source input. Always associated with pin function OSC1 (see OSC1/CLKI, OSC2/CLKO pins).
OSC2/CLKO	14	15	31	33		—	Oscillator crystal or clock output.
OSC2					O		Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode.
CLKO					O		In RC mode, OSC2 pin outputs CLKO, which has 1/4 the frequency of OSC1 and denotes the instruction cycle rate.
MCLR/VPP	1	2	18	18		ST	Master Clear (input) or programming voltage (output).
MCLR					I		Master Clear (Reset) input. This pin is an active low Reset to the device.
VPP					P		Programming voltage input.
							PORTA is a bidirectional I/O port
RA0/AN0	2	3	19	19		TTL	
RA0					I/O		Digital I/O.
AN0					I		Analog input 0.
RA1/AN1	3	4	20	20		TTL	
RA1					I/O		Digital I/O.
AN1					I		Analog input 1.
RA2/AN2/VREF-/CVREF	4	5	21	21		TTL	
RA2					I/O		Digital I/O.
AN2					I		Analog input 2.
VREF-					I		A/D reference voltage (Low) input.
CVREF					O		Comparator VREF output.
RA3/AN3/VREF+	5	6	22	22		TTL	
RA3					I/O		Digital I/O.
AN3					I		Analog input 3.
VREF+					I		A/D reference voltage (High) input.
RA4/T0CKI/C1OUT	6	7	23	23		ST	
RA4					I/O		Digital I/O – Open-drain when configured as output.
T0CKI					I		Timer0 external clock input.
C1OUT					O		Comparator 1 output.
RA5/AN4/SS/C2OUT	7	8	24	24		TTL	
RA5					I/O		Digital I/O.
AN4					I		Analog input 4.
SS					I		SPI slave select input.
C2OUT					O		Comparator 2 output.

Legend: I = input O = output I/O = input/output P = power
— = Not used TTL = TTL input ST = Schmitt Trigger input

Note 1: This buffer is a Schmitt Trigger input when configured as the external interrupt.
2: This buffer is a Schmitt Trigger input when used in Serial Programming mode.
3: This buffer is a Schmitt Trigger input when configured in RC Oscillator mode and a CMOS input otherwise.

© 2001-2013 Microchip Technology Inc.

TABLE 1-3: PIC16F874A/877A PINOUT DESCRIPTION (CONTINUED)

Pin Name	PDIP Pin#	PLCC Pin#	TQFP Pin#	QFN Pin#	I/O/P Type	Buffer Type	Description
							PORTB is a bidirectional I/O port. PORTB can be software programmed for internal weak pull-up on all inputs.
RB0/INT	33	36	8	9		TTL/ST(1)	
RB0					I/O		Digital I/O.
INT					I		External interrupt.
RB1	34	37	9	10	I/O	TTL	Digital I/O.
RB2	35	38	10	11	I/O	TTL	Digital I/O.
RB3/PGM	36	39	11	12		TTL	
RB3					I/O		Digital I/O.
PGM					I		Low-voltage ICSP programming enable pin.
RB4	37	41	14	14	I/O	TTL	Digital I/O.
RB5	38	42	15	15	I/O	TTL	Digital I/O.
RB6/PGC	39	43	16	16		TTL/ST(2)	
RB6					I/O		Digital I/O.
PGC					I		In-circuit debugger and ICSP programming clock.
RB7/PGD	40	44	17	17		TTL/ST(2)	
RB7					I/O		Digital I/O.
PGD					I/O		In-circuit debugger and ICSP programming data.

Legend: I = input O = output I/O = input/output P = power
— = Not used TTL = TTL input ST = Schmitt Trigger input

Note 1: This buffer is a Schmitt Trigger input when configured as the external interrupt.
2: This buffer is a Schmitt Trigger input when used in Serial Programming mode.
3: This buffer is a Schmitt Trigger input when configured in RC Oscillator mode and a CMOS input otherwise.

TABLE 1-3: PIC16F874A/877A PINOUT DESCRIPTION (CONTINUED)

Pin Name	PDIP Pin#	PLCC Pin#	TQFP Pin#	QFN Pin#	I/O/P Type	Buffer Type	Description
							PORTC is a bidirectional I/O port.
RC0/T1OSO/T1CKI	15	16	32	34		ST	
RC0					I/O		Digital I/O.
T1OSO					O		Timer1 oscillator output.
T1CKI					I		Timer1 external clock input.
RC1/T1OSI/CCP2	16	18	35	35		ST	
RC1					I/O		Digital I/O.
T1OSI					I		Timer1 oscillator input.
CCP2					I/O		Capture2 input, Compare2 output, PWM2 output.
RC2/CCP1	17	19	36	36		ST	
RC2					I/O		Digital I/O.
CCP1					I/O		Capture1 input, Compare1 output, PWM1 output.
RC3/SCK/SCL	18	20	37	37		ST	
RC3					I/O		Digital I/O.
SCK					I/O		Synchronous serial clock input/output for SPI mode.
SCL					I/O		Synchronous serial clock input/output for I^2C mode.
RC4/SDI/SDA	23	25	42	42		ST	
RC4					I/O		Digital I/O.
SDI					I		SPI data in.
SDA					I/O		I^2C data I/O.
RC5/SDO	24	26	43	43		ST	
RC5					I/O		Digital I/O.
SDO					O		SPI data out.
RC6/TX/CK	25	27	44	44		ST	
RC6					I/O		Digital I/O.
TX					O		USART asynchronous transmit.
CK					I/O		USART1 synchronous clock.
RC7/RX/DT	26	29	1	1		ST	
RC7					I/O		Digital I/O.
RX					I		USART asynchronous receive.
DT					I/O		USART synchronous data.

Legend: I = input O = output I/O = input/output P = power
— = Not used TTL = TTL input ST = Schmitt Trigger input

Note 1: This buffer is a Schmitt Trigger input when configured as the external interrupt.
2: This buffer is a Schmitt Trigger input when used in Serial Programming mode.
3: This buffer is a Schmitt Trigger input when configured in RC Oscillator mode and a CMOS input otherwise.

© 2001-2013 Microchip Technology Inc.

TABLE 1-3: PIC16F874A/877A PINOUT DESCRIPTION (CONTINUED)

Pin Name	PDIP Pin#	PLCC Pin#	TQFP Pin#	QFN Pin#	I/O/P Type	Buffer Type	Description
							PORTD is a bidirectional I/O port or Parallel Slave Port when interfacing to a microprocessor bus.
RD0/PSP0	19	21	38	38		ST/TTL(3)	
RD0					I/O		Digital I/O.
PSP0					I/O		Parallel Slave Port data.
RD1/PSP1	20	22	39	39		ST/TTL(3)	
RD1					I/O		Digital I/O.
PSP1					I/O		Parallel Slave Port data.
RD2/PSP2	21	23	40	40		ST/TTL(3)	
RD2					I/O		Digital I/O.
PSP2					I/O		Parallel Slave Port data.
RD3/PSP3	22	24	41	41		ST/TTL(3)	
RD3					I/O		Digital I/O.
PSP3					I/O		Parallel Slave Port data.
RD4/PSP4	27	30	2	2		ST/TTL(3)	
RD4					I/O		Digital I/O.
PSP4					I/O		Parallel Slave Port data.
RD5/PSP5	28	31	3	3		ST/TTL(3)	
RD5					I/O		Digital I/O.
PSP5					I/O		Parallel Slave Port data.
RD6/PSP6	29	32	4	4		ST/TTL(3)	
RD6					I/O		Digital I/O.
PSP6					I/O		Parallel Slave Port data.
RD7/PSP7	30	33	5	5		ST/TTL(3)	
RD7					I/O		Digital I/O.
PSP7					I/O		Parallel Slave Port data.
							PORTE is a bidirectional I/O port.
RE0/$\overline{RD}$/AN5	8	9	25	25		ST/TTL(3)	
RE0					I/O		Digital I/O.
$\overline{RD}$					I		Read control for Parallel Slave Port.
AN5					I		Analog input 5.
RE1/$\overline{WR}$/AN6	9	10	26	26		ST/TTL(3)	
RE1					I/O		Digital I/O.
$\overline{WR}$					I		Write control for Parallel Slave Port.
AN6					I		Analog input 6.
RE2/$\overline{CS}$/AN7	10	11	27	27		ST/TTL(3)	
RE2					I/O		Digital I/O.
$\overline{CS}$					I		Chip select control for Parallel Slave Port.
AN7					I		Analog input 7.
VSS	12, 31	13, 34	6, 29	6, 30, 31	P	—	Ground reference for logic and I/O pins.
VDD	11, 32	12, 35	7, 28	7, 8, 28, 29	P	—	Positive supply for logic and I/O pins.
NC	—	1, 17, 28, 40	12,13, 33, 34	13	—	—	These pins are not internally connected. These pins should be left unconnected.

Legend: I = input O = output I/O = input/output P = power
— = Not used TTL = TTL input ST = Schmitt Trigger input

Note 1: This buffer is a Schmitt Trigger input when configured as the external interrupt.
2: This buffer is a Schmitt Trigger input when used in Serial Programming mode.
3: This buffer is a Schmitt Trigger input when configured in RC Oscillator mode and a CMOS input otherwise.

NOTES:

© 2001-2013 Microchip Technology Inc.

2.0 MEMORY ORGANIZATION

There are three memory blocks in each of the PIC16F87XA devices. The program memory and data memory have separate buses so that concurrent access can occur and is detailed in this section. The EEPROM data memory block is detailed in **Section 3.0 "Data EEPROM and Flash Program Memory"**.

Additional information on device memory may be found in the PIC® Mid-Range MCU Family Reference Manual (DS33023).

2.1 Program Memory Organization

The PIC16F87XA devices have a 13-bit program counter capable of addressing an 8K word x 14 bit program memory space. The PIC16F876A/877A devices have 8K words x 14 bits of Flash program memory, while PIC16F873A/874A devices have 4K words x 14 bits. Accessing a location above the physically implemented address will cause a wraparound.

The Reset vector is at 0000h and the interrupt vector is at 0004h.

FIGURE 2-1: PIC16F876A/877A PROGRAM MEMORY MAP AND STACK


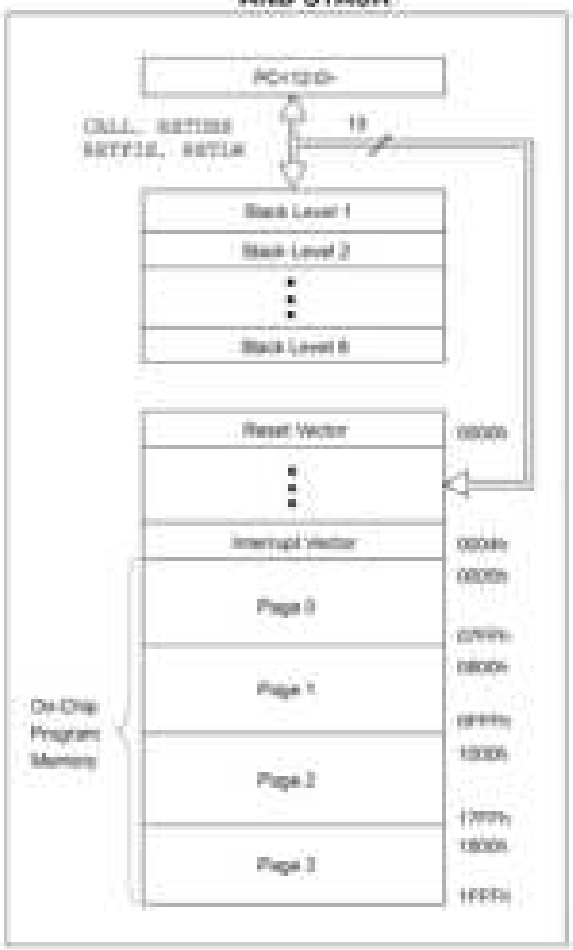


FIGURE 2-2: PIC16F873A/874A PROGRAM MEMORY MAP AND STACK

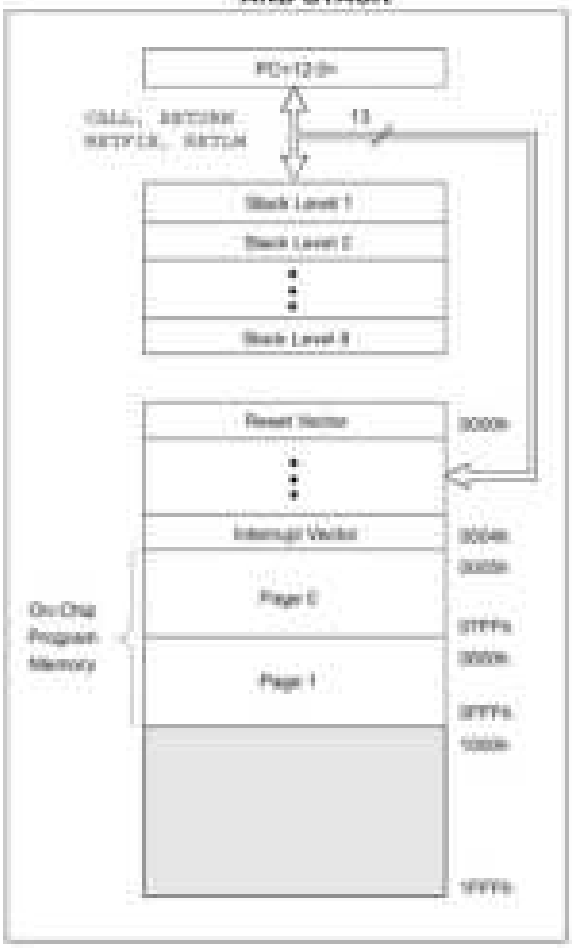

2.2 Data Memory Organization

The data memory is partitioned into multiple banks which contain the General Purpose Registers and the Special Function Registers. Bits RP1 (Status<6>) and RP0 (Status<5>) are the bank select bits.

RP1:RP0	Bank
0 0	0
0 1	1
1 0	2
1 1	3

Each bank extends up to 7Fh (128 bytes). The lower locations of each bank are reserved for the Special Function Registers. Above the Special Function Registers are General Purpose Registers, implemented as static RAM. All implemented banks contain Special Function Registers. Some frequently used Special Function Registers from one bank may be mirrored in another bank for code reduction and quicker access.

Note:	The EEPROM data memory description can be found in **Section 3.0 "Data EEPROM and Flash Program Memory"** of this data sheet.

2.2.1 GENERAL PURPOSE REGISTER FILE

The register file can be accessed either directly, or indirectly, through the File Select Register (FSR).

© 2001-2013 Microchip Technology Inc.