


MODEL: NaCRX14S

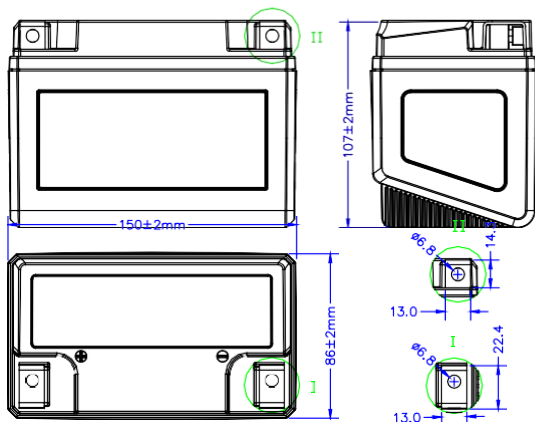

PARAMETER

Volts	12V	
Rated Capacity	9Ah(10 hours rate)	
Charging cut-off voltage	15V	
Starts	≥80000times	
Power(25°C)	10 hours rate	108Wh
Appx.Dimension	Length	150±2mm(5.91inch)
	Width	86±2mm(3.39inch)
	Height	107±2mm(4.21inch)
Weight	1.30±5%Kg(2.87pound)	
Using ambient temperature	Charge Temperature 0°C~55°C(32°F~131°F)	
	Discharge temperature -40°C~66°C(-40°F~140°F)	
Starting ability	Ambient temperature 25°C(77°F),Pulse discharge time ≤5 seconds	315.0A
	Ambient temperature -18°C(-0.4°F),Pulse discharge time ≤5 seconds	180A
Self discharge	Approximately 1.5%, Every month, 25°C(77°F)	
Charging method	Constant current and constant voltage charging	Temperature 25°C(77°F)
	Standard charge current:0.5C	
	Maximum charging current:3C	
	Charging Voltage:15V	

Replace lead-acid battery type

YTZ14S, YTZ14S, YTZ14S, YTX9, YTX9-BS, YT120-BS, YTX9-BS

1.Ultra-strong starting performance
Support up to 35C pulse discharge at room temperature, Quick and reliable starting in -25°C low temperature environment.

3.Long shelf-life time
Full charge lasts for 18 months without recharging.

5.Super over-discharge resistance
Extreme over-discharge to 0 volts, no damage to the battery.

7.360° flexible installation
No risk of leakage, easily mounted in any direction.

2.Excellent safety protection
The first internal protection device of the battery core electively prevents thermal runaway and ensures the usage safety.


4.Ultra-long life
Starting times ≥ 80,000 times.

6.Extremely fast charging
3 minutes to meet the starting needs under the deficit state.


BATTERY STORAGE ENVIRONMENT

Suggested storage temperature	1 month	-20~45°C(-4°F~113°F)
	3 months	0~45°C(32°F~113°F)
	1 year	0~25°C(32°F~77°F)

TEMPERATURE AND CAPACITY(0.2C)

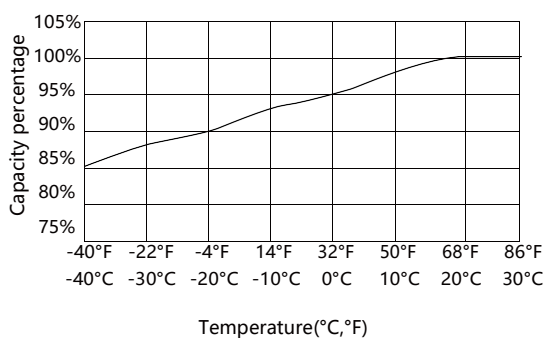

CHARGE DISCHARGE CURVE AND CHARGE DISCHARGE TIME 25°C(77°F)

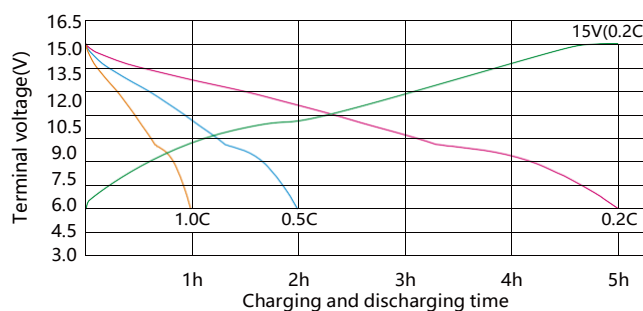

PRECAUTIONS

- ★ Store the cell in a cool, dry and well-ventilated area.
- ★ The above parameters are for reference only, the accurate parameters shall be based on the actual production order.
- ★ During usage, it is strictly prohibited to reverse the positive and negative terminals of the battery.
- ★ Please use a special charger for Sodium-ion batteries when charging.
- ★ If other types of 12V chargers are used, there may be a deviation in charging capacity.
- ★ Do not overcharge, otherwise, it may cause overheating and fire accident.