



Win-Kare Technology Company Ltd.

Unit 305,Block B, Danzhutou Hi-Tech Park, No.58 Yuandun Road ,
Nanwan Street,Longgang District, Shenzhen, Duangdong, China
Tel: 86 755 25003075; mail: service@win-kare.com

User Manual

Product Name: Foot Operated Slide Dimmer
Product Model: WK-300S
Electrical Ratings: 220-240VAC; 50/60hz; 1.6A;Max.300W; Ta: 45℃
Output: Dimmable LED lamp: 3-100W or Incandescent lamp/Halogen:75-300W.


User Instructions:

1. WK-300S is suitable for halogen lamp, incandescent lamp and LED lamp with dimmerable driver.
2. The dimmer contains a replaceable fuse with rating 1.6A, 250V.
3. The wire dimension is: 3x0,75/3x1,0mm², the max. external diameter of wire is 6.5mm.


Installation:

1. Required parts for installation: 6 pcs of screws; 2pcs of binding post. 2pcs of non-slip mats.
2. Read the wiring drawing in **picture 1**;
3. Connect lamp wire to the line out port on the terminal.
4. Connect input wire to the line in port on the terminal.
5. Use the screw and binding post to fix the line according to **picture 2**.

Picture 1

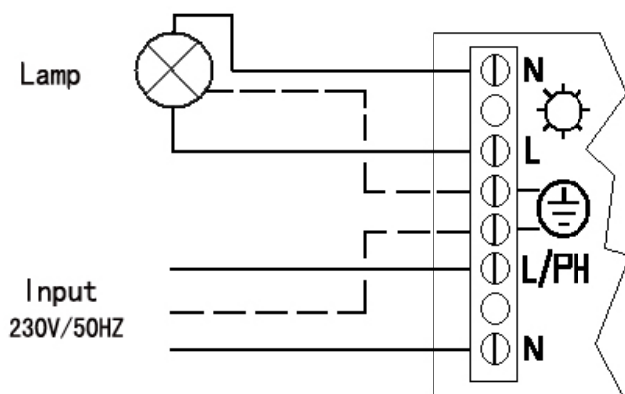

Picture 2

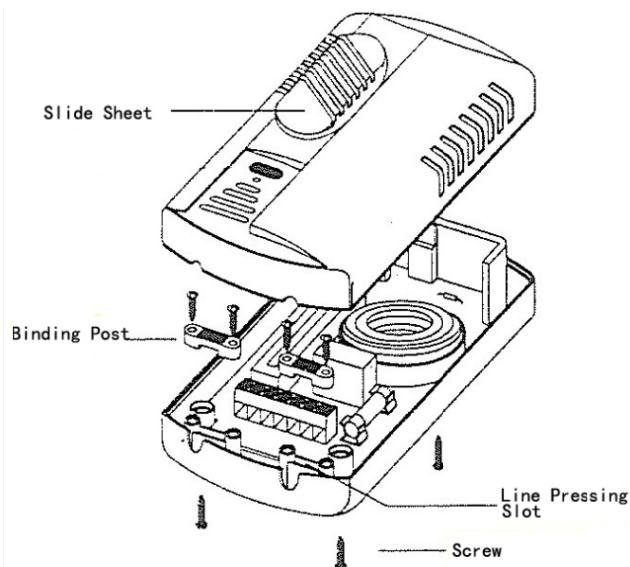

Warning!

Always disconnect the power before you do any operation to the dimmer.

