

1080P HIGH DEFINITION PTZ COLOR VIDEO CAMERAS




Order Models:
MCC-K2001: up to 1080p, 20X, 2.2MP

Specifications

- ※ 1080P HD zoom module, 20x, 2.2 MegaPixel;
- ※ 1080p/1080i HD video format, suitable for HD TV transmission;
- ※ Compatible with various video formats, including 59.94Hz, 50Hz and SD video etc;
- ※ Video interfaces: Video, DVI and SDI optional;
- ※ IR remote control of P/T/Z and other camera functions;
- ※ Compact design with excellent mechanical design;
- ※ Back light compensation;
- ※ RS232 in, RS232 out, RS485, RS422 interfaces;
- ※ Pelco D/P, VISCA protocol.


Dimensions

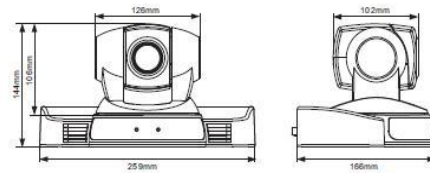


Rear View



Accessories

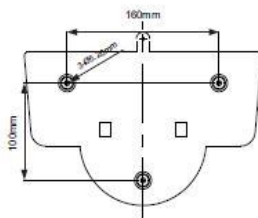

Ceiling Plate



Wall Bracket

Specifications

Model	MCC-K2001
Image Sensor	1/2.8" Exmor CMOS, 2.2MP
HD Signal Format	1080p/60, 1080p/50, 1080p/30, 1080p/29.97, 1080p/25, 1080i/60, 1080i/59.94, 1080i/50, 1080i/25, 1080i/30, 720p/60, 20p/50, 720p/30, 720P/25
SD Signal Format	NTSC(CROP), NTSC(SQUEEZE), PAL(CROP), PAL(SQUEEZE)
Field of View	55.4° - 2.9°
Shortest Focus Distance	10mm(tele), 1,000mm(wide)
Illumination	0.1Lux
Lens	f=4.7-94mm, F=1.6-F3.5

Shuter	1/2-1/10,000sec
Optical Zoom	20X
Digital Zoom	12X
BLC	On/Off
Focus	Auto,Manual,One Push,Trigger AF
S/N Ratio	≥50dB
P/T Range	Pan:150° ,Tilt:-30° -90° auto flip
P/T Speed	Pan:0.1° -200° /sec,Tilt:0.1° -150° /sec
Preset Number	256
HD Video Output	HD-SDI,DVI-I
SD Video Output	CVBS
Image Flip	Yes
Comm.Port	RS-485/RS422,RS-232 in, RS-232 out
Baud Rate	1200bps,2400bps,4800bps,9600bps,19200bps
Protocol	Pelco-D,Pelco-p,VISCA
Spectra Address	0-255
Operating Temperature	0° C-+45° C
Storage Temperature	-20°C-+60° C
Humidity	≤95%(non-condensation)
Power	12VDC, <15W
Dimension(W X H X L)	260mm x 166mm x 140mm
Body Color	Black/Sliver

*** Product specification are subject to change without notice ***

www.winsafecctv.com