



92 Series

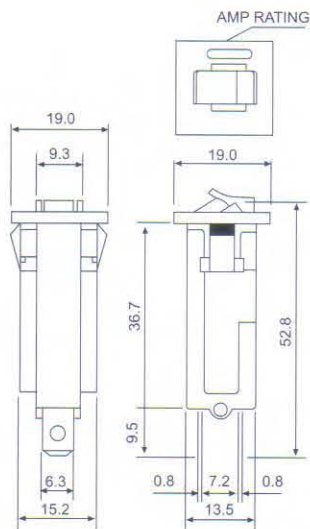

Dimension in mm

Recommended Panel Cutouts

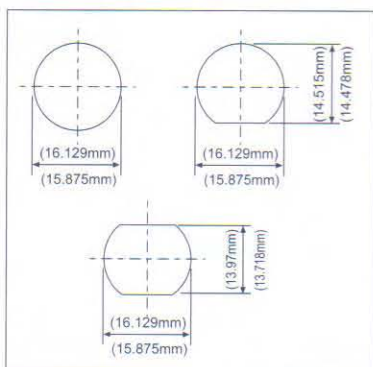

Specifications


- * Standard Rating: 1.5-20 AMPERE.
- * Input Power: 125 VAC/250 VAC/32 VDC.
- * Dielectric Strength: 1500 VAC/1 Minute.
- * Interrupt Capacity: 125 VAC x1000 A, 250 VAC x 200 A.
- * Insulation Resistance: >100 MΩ
- * Calibration: 25°C-105°C of Rated Current-Continuously Carried.
25°C-Between 101% to 134%-May Trip or Not.
25°C-135% of Rated Current-Trip Within 1 Hour.
25°C-200% of Rated Current-Trip Within 1 Minute.
- * Contact Endurance:
125 VAC x 150% of Rated Current-500 Cycles.
- * Reset: Manual Push Reset/Auto Reset.

Approvals

- * Approval: 2-18 A 125/250 VAC
- * Approval: 3-15 A 125 VAC
- * Approval: 2A-15 A 125/250 VAC/32 VDC

Trip Time Curve

Interrupting Characteristics @ +25 °C

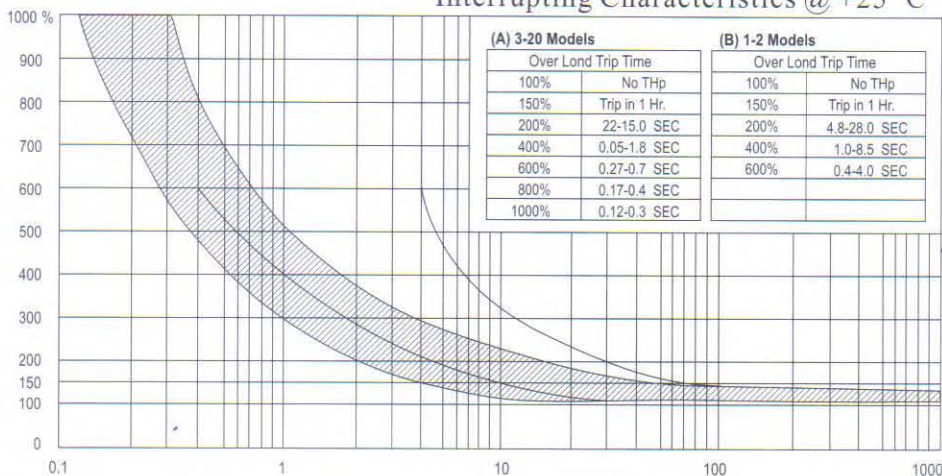

MAX Internal Resistance	
1.5A-2 A	0.150 Ω
2.5A-3 A	0.120 Ω
3A-4A	0.080 Ω
4A-5 A	0.040 Ω
5A-6 A	0.025 Ω
6A-7A	0.020 Ω
8A-9 A	0.016 Ω
10A-11 A	0.012 Ω
12A-13A	0.010 Ω
14A-16A	0.008 Ω
18A-20A	0.006 Ω