


Digital to Analog Audio Converter

Quick Installation Guide Ver. 1.0

All brand names and trademarks are properties of their respective owners

PANEL DESCRIPTIONS:

Study the panel drawings below and become familiar with the signal input(s),output(s) and power requirements.

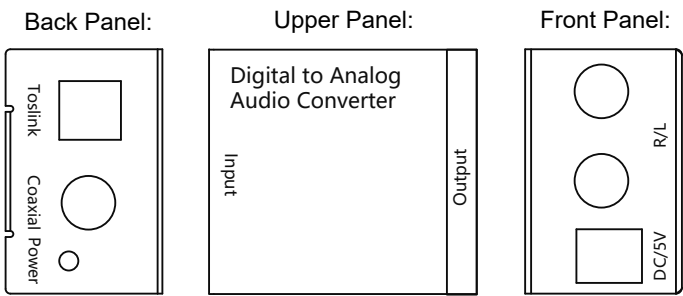


Before installation, please make sure all devices you wish to connect have been turned off.

- 1) Connect the audio source device to the Converter using appropriate Toslink or Coaxial cables.
- 2) Connect the A/V Receivers or Amplifiers to the Converter using appropriate L/R cable.
- 3) Insert the DC side of 5V power supply into the converter and then connect the AC side of the power supply into the wall outlet.

Note: When connected to the Toslink and Coaxial cables at the same time, the product will give priority to Toslink input.

CONNECTION DIAGRAM:

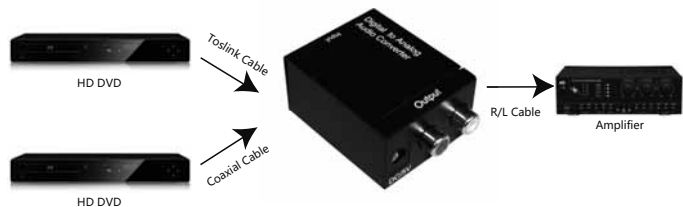

INTRODUCTION:

This Digital to Analog Audio Converter is designed for either home or professional audio switching. It converts Coaxial or Toslink digital audio signals to analog L/R audio and is available for connection to an external device such as an amplifier via standard RCA-style jacks. This Converter is small in size and quite easy to install.

FEATURES:

This Converter has many features that enable it to perform in a superior manner. Among those features you will find:

- Converts Coaxial or Toslink digital audio signals to analog L/R audio.
- Supports sampling rate at 32, 44.1, 48 and 96KHz.
- 24-bit S/PDIF incoming bit stream on left and right channels.
- Provides electromagnetic-noise-free transmission.
- Easy to install and simple to operate.

PACKAGE CONTENTS:

- 1x Main unit
- 1x 5V DC Power
- 1x User Manual

SPECIFICATIONS:

Signal Inputs/Output	
Input Audio	Coaxial or Toslink digital audio
Output Audio	L/R audio
Connector	
Input Audio Connector	Toslink, 1XRCA(Coaxial)
Output Audio Connector	2XRCA(R/L)
Frequency Response	<0.5db
Sampling rate	32, 44.1, 48 and 96KHz
Signal to Noise	<-109db
Degree of Separation	<-100db
Mechanical	
Size(L-W-H)	51X41X26MM
Weight	75g
Warranty	
Limited Warranty	1 Year Parts and Labor
Environmental	
Operating Temperature	0 ℃ to +40℃
Operating Humidity	20% to 90 % RH (no condensation)
Storage Temperature	-10℃ to +80℃
Storage Humidity	5% to 90 % RH (no condensation)
Power Requirement	
External Power Supply	5V DC@1A
Power Consumption	0.5watts(max)
Regulatory Approvals	
Converter Unit	FCC, CE, UL
Power Supply	UL, CE, FCC
Accessories Adapter	
AC Power Adapter	US standard, UK standard and so on
User Manual	English Version