


Q15P启动电源规格书
Q15P Jump Starter Specification

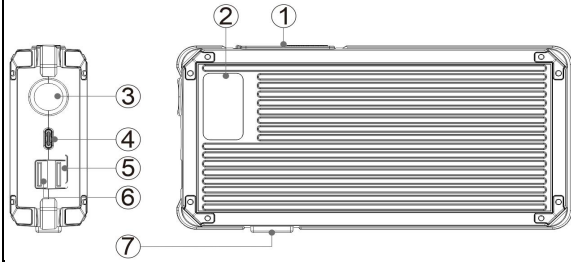

启动输出电压:	Starting Voltage
12-16.8V	12-16.8V
启动电流:	Starting Current
600A	600A
峰值启动电流:	Peak Current
2500A	2500A
启动输出接口	Jump start output
EC5	EC5
电池容量:	Battery Capacity
20000mah 3.7V	20000mah 3.7V
显示屏	Display
1.2寸数码管	1.2inch digital tube
usb1输出:	usb1 output:
5V 2A	5V 2A
usb2输出:	usb2 output:
QC3.0 5V 9V 12V	QC3.0 5V 9V 12V
照明	LED Flashlight
led 1瓦聚光手电	1 watt spotlight flashlight
充电电压电流:	Charging voltage and current:
QC2.0 5V 9V	QC2.0 5V 9V
充电时间	Charging time
9V 2A约5小时	9V 2A about 5 hours
外壳材质	Shell material
ABS V0防火料	ABS V0 Fire-resistant material
工作温度:	working temperature:
-20—60℃	-20—60℃
① 电源开关键Power button	净重:
② 显示屏 Display	640g
③ LED手电 LED Flashlight	毛重:
④ type-c充电输入接口 Type-C input	1.1kg
⑤ USB1输出接口 USB output	尺寸 (长宽高):
⑥ QC3.0快充输出接口	175*86*38mm
⑦ 汽车启动EC5输出接口Car jump start EC5 output	包装尺寸 (长宽高):
	175*86*38mm
	认证列表
	FCC CE ROHS UL2743
	Certificates:
	FCC CE ROHS UL2743

标配配件清单 (图片以实物为准)
Standard Accessories List

1 智能夹 Smart cable with clamps	
2 充电线 USB to micro USB charging c.	
3 eva包 EVA bag	

4	说明书 User manual	智能夹子	充电线	EVA包
---	-----------------	------	-----	------