

- Tinned ,annealed, stranded or solid copper conductor.
- Color -coded PVC insulation.
- Rated temperature:105℃.Rated voltage:600volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CSA FT1 vertical flamt test
- **Top coated conductor is available**

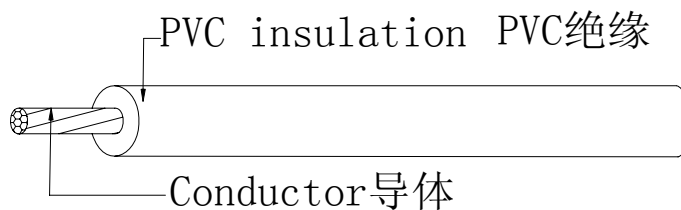
说明:

- 导体使用单股或绞线裸铜或镀锡铜
- PVC绝缘
- 额定温度: 105℃ 额定电压: 600Volts
- 使用标准厚度, 易剥, 截断容易。
- 可通过UL VW-1 及 CSA FT1, 垂直燃烧测试
- 可使用先绞后镀 (TC) 为导体

- For general purpose internal wiring of electronic and electrical equipment

应用:

- 用于电子、电器设备内部配线

Construction:**构造:**

| UL Style& CSA Type | Conductor | | Insulation Thickness mm | Overall Diameter mm | Stand Put-up | | Conductor Resistance at 20℃ Ω/KM |
|-------------------------------|-----------|----------|----------------------------|------------------------|--------------|--------|-------------------------------------|
| | AWG | No/mm | | | Ft/coil | M/Coil | |
| UL1056 CSA (Stranded) | 20 | 21/0.178 | 1.524 | 4.00 | 1000 | 305 | 36.70 |
| | 18 | 34/0.178 | 1.524 | 4.30 | 1000 | 305 | 23.20 |
| | 16 | 26/0.25 | 1.524 | 4.50 | 1000 | 305 | 14.60 |
| | 14 | 41/0.25 | 1.524 | 4.90 | 1000 | 305 | 8.96 |
| | 12 | 65/0.25 | 1.524 | 5.40 | 1000 | 305 | 5.64 |
| | 10 | 105/0.25 | 1.524 | 6.20 | 1000 | 305 | 3.55 |
| UL1056 CSA (Top-coated) | 20 | 7/0.32 | 1.524 | 4.00 | 1000 | 305 | 37.10 |
| | 18 | 7/0.4 | 1.524 | 4.30 | 1000 | 305 | 23.70 |
| | 16 | 7/0.488 | 1.524 | 4.50 | 1000 | 305 | 14.20 |
| UL1028 CSA (Solid) | 22 | 1/0.634 | 1.524 | 3.70 | 1000 | 305 | 56.40 |
| | 20 | 1/0.813 | 1.524 | 3.90 | 1000 | 305 | 35.20 |
| | 18 | 1/1.024 | 1.524 | 4.10 | 1000 | 305 | 22.20 |
| | 16 | 1/1.29 | 1.524 | 4.40 | 1000 | 305 | 14.00 |