

HFS40A(JGX-40FA)

SOLID STATE RELAY



Features

- 2500V dielectric strength
- LED status indicator
- Photo isolation
- Built-in snubber
- Zero cross or random turn-on
- Printed circuit board mount
- RoHS compliant

INPUT

Control voltage range	05D	4 to 6VDC
	12D	9.6 to 14.4VDC
	24D	19.2 to 28.8VDC
Must operate voltage	05D	4VDC
	12D	9.6VDC
	24D	19.2VDC
Must release voltage	05D	1.0VDC
	12D	
	24D	
Max. reverse protection voltage	05D	-6VDC
	12D	-14.4VDC
	24D	-28.8VDC
Max. input current		20mA

OUTPUT

Load voltage range		220A: 75 to 264VAC 380A: 75 to 400VAC
Load current range		2A type: 0.1 to 2A 3A type: 0.1 to 3A
Max. surge current (10ms)		10 times of rated current
Max. leakage current		1.5mA
Max. on-state voltage drop		1.5VAC
turn-on time	Zero cross turn-on	1/2 cycle + 1ms
	Random turn-on	1ms
turn-off time		1/2 cycle + 1ms
Max. transient over voltage	HFS40A/□□-220A□□□	600Vpk
	HFS40A/□□-380A□□□	800Vpk
Min. off-state dv/dt		100V/μs
Min. power factor		0.5

GENERAL

Dielectric strength (input to output)		2500VAC, 50/60Hz, 1min.
Insulation resistance		1000MΩ (at 500VDC)
Max. capacitance (input to output)		8pF
Vibration resistance		5g 10 to 55Hz
Shock resistance		1000m/s ²
Ambient temperature	Operating	-30°C to +80°C
	Storage	-30°C to +100°C
Ambient humidity		45 to 85% RH
Unit weight		Typ. 18g

DESCRIPTION

This SPST-NO printed circuit board mount SSR provides AC output switching in a high density package. The HFS40A's DC input is compatible with 5,12 and 24V logic systems. The relays include a LED indicator to provide input status information. All models include an internal snubber. The relays provide 2500VAC opto-isolation, between input and output. Encapsulation, thermally conductive epoxy.


APPLICATIONS

- I/O interface
- Programmable controllers

PRECAUTIONS

1. Soldering must be completed within 10 seconds at 260°C or less or within 5 seconds at 350°C or less.
2. The SSR case serves to dissipate heat. Install the relays so that they are adequately ventilated. If poor ventilation is unavoidable, reduce the load current by half.
3. When using the HFS40A series for an AC load with a peak voltage of more than the rated, connect the load terminals of the relay to an inrush absorber(varistor). The recommended varistor voltage as follow:

The rated voltage	The recommended varistor voltage
200VAC	470VAC
380VAC	750VAC



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2006 Rev. 2.00

ORDERING INFORMATION


Type	HFS40A / 05 D- 220 A 2 Z- L XXX							
Input voltage	05: 4 to 6V 12: 9.6 to 14.4V 24: 19.2 to 28.8V							
Input voltage form	D: DC							
Load voltage	220: 220V 380: 380V							
Load voltage form	A: AC							
Load current	02: 2A 03: 3A							
Zero cross function	Z: Zero cross turn-on P: Random turn-on							
LED indicator	L: With LED							
Special request code	(Only for special requirements, e.g. 555 stand for RoHS compliant)							

Notes: HFS40A is an environmental friendly product, please mark special code (555) when order.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


Outline Dimensions

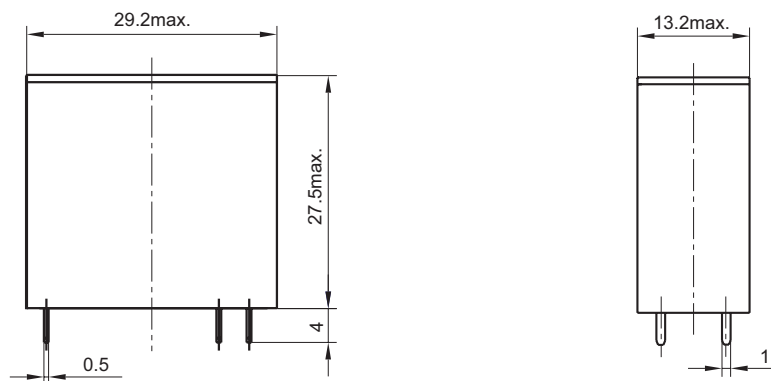



PCB Layout



Wiring Diagram

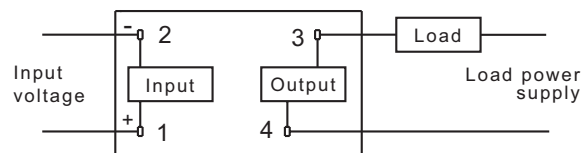

CHARACTERISTIC CURVE

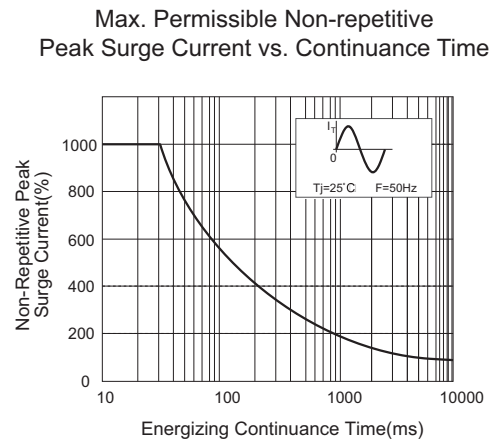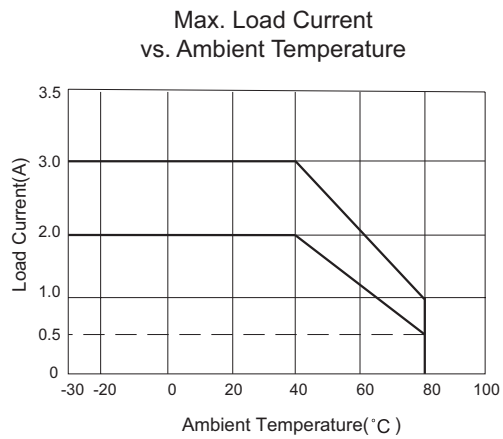

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.