



Model	Voltage	Current		Model	Voltage	Current	
		Min.	Max.			Min.	Max.
ASSA1-042YYY	4.2V	100mA	2000mA	ASSA1-091YYY	9.1V	100mA	1300mA
ASSA1-045YYY	4.5V	100mA	2000mA	ASSA1-100YYY	10.0V	100mA	1200mA
ASSA1-048YYY	4.8V	100mA	2000mA	ASSA1-112YYY	11.2V	100mA	1050mA
ASSA1-050YYY	5.0V	100mA	2000mA	ASSA1-115YYY	11.5V	100mA	1040mA
ASSA1-052YYY	5.2V	100mA	2000mA	ASSA1-118YYY	11.8V	100mA	1000mA
ASSA1-055YYY	5.5V	100mA	2000mA	ASSA1-120YYY	12.0V	100mA	1000mA
ASSA1-060YYY	6.0V	100mA	1800mA	ASSA1-125YYY	12.5V	100mA	960mA
ASSA1-065YYY	6.5V	100mA	1800mA	ASSA1-135YYY	13.5V	100mA	880mA
ASSA1-070YYY	7.0V	100mA	1700mA	ASSA1-140YYY	14.0V	100mA	850mA
ASSA1-072YYY	7.2V	100mA	1650mA	ASSA1-150YYY	15.0V	100mA	800mA
ASSA1-075YYY	7.5V	100mA	1600mA	ASSA1-160YYY	16.0V	100mA <td 750mA	
ASSA1-080YYY	8.0V	100mA	1500mA	ASSA1-175YYY	17.5V	100mA	680mA
ASSA1-085YYY	8.5V	100mA	1400mA	ASSA1-180YYY	18.0V	100mA	660mA
ASSA1-090YYY	9.0V	100mA	1330mA				

Other models and configurations on request.

**Mechanical**


**LxWxH**

**66.2\*43.6\*27mm**

**Output Connector**

**DC Plug**

**Drawing (mm)**

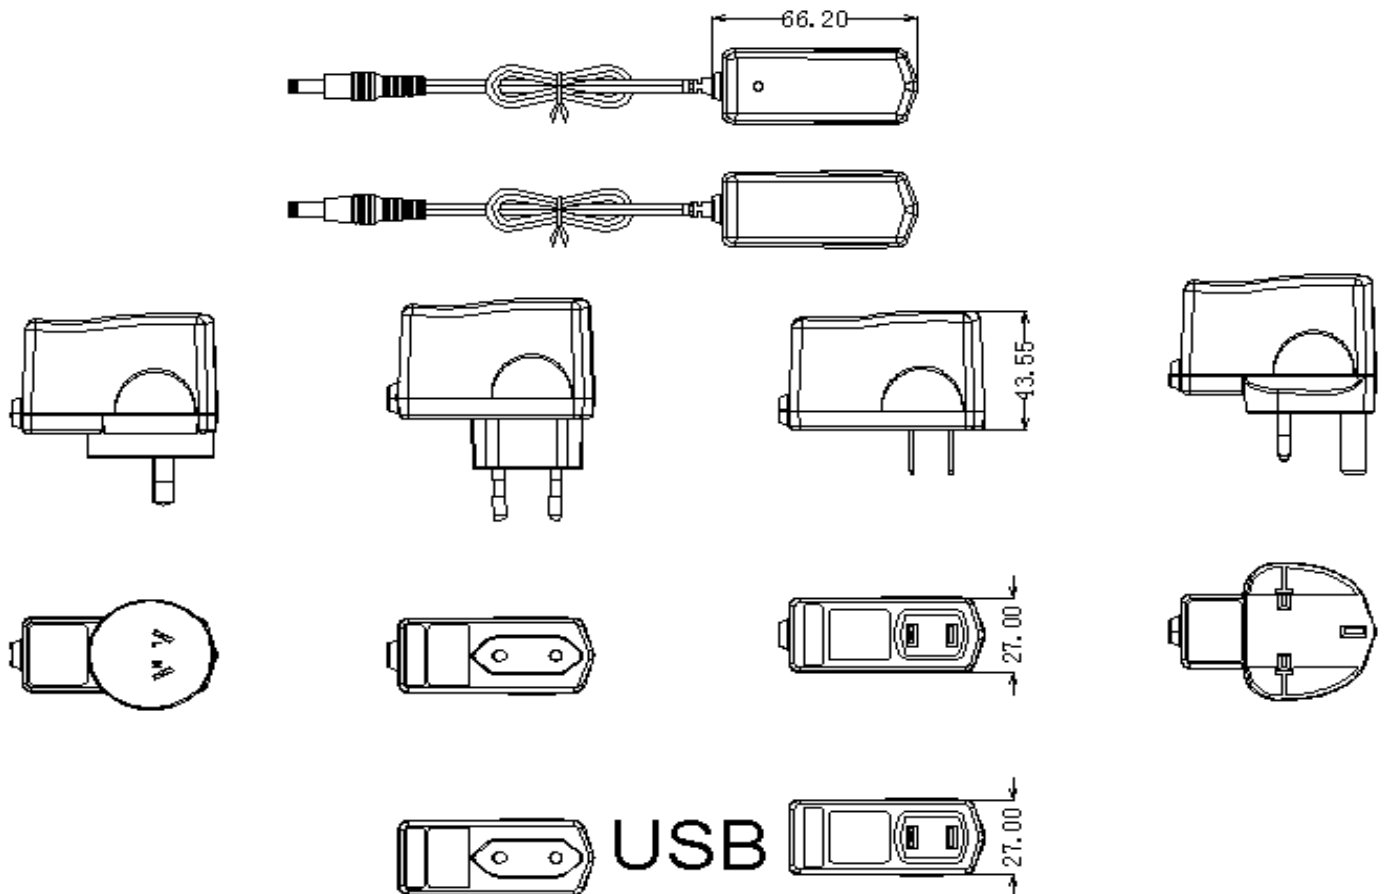

Aquilstar Precision Industrial (Shenzhen) Co., Ltd

Add: No.4 of Tengfeng Third road,Fenghuang Third Industry,Fuyong Town,Bao'an Zone.Shenzhen,China

TEL: + 86 0755 33262973/33933017 Fax: +86 0755 29915525 www.aquilstar.com.cn,

http://www.globalsources.com/aquilstar.co