

Haoliyuan (Shenzhen) Electronic Co., Ltd


E-mail:julie@haoliyuan.net

Mobile:+86-15220117341

Skype ID:julie_4139

Know about the Smart Human Presence+Luminance Sensor

This is a smart Human Presence+Luminance sensor, adopts super low power Zigbee wireless networking technology with AC 90~240V supply, it can detect people(even breaths) or animals that are moving, 6M detection distance, whether day and night can be real-time monitoring, and can measuring the level of light in a room, make your home control system to be able to intelligently maintain its ambiance. Suitable to be used for safety protection of residential villas, factories, shopping malls, warehouses, office buildings, banks, computer room and other places.

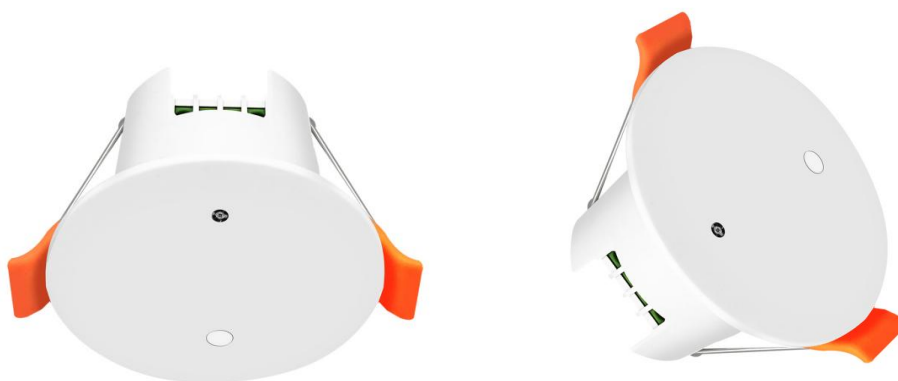

LED	Blinking	The device enters Zigbee network configuration mode(preparing to connect the gateway)
	OFF	The device is under standby status
Power Jack	AC 90~240V	
Button	Reset or enter configuration mode	Press and hold the button for 5 seconds then the LED blinks, the device will enter configuration mode

Haoliyuan (Shenzhen) Electronic Co., Ltd

E-mail:julie@haoliyuan.net

Mobile:+86-15220117341

Skype ID:julie_4139

Technical parameters

App/Platform	Tuya
OS support	Android/IOS
Transmission Protocol	Zigbee, IEEE802.15.4
Power support	AC 90~240V
Zigbee Wireless distance	Max 90 meters(Empty area)
Detecting Range	≤6 Meters(Adjustable)
Viewing angel	120 degree
The detect brightness range	0~1000lux
Operating Temperature	-10℃~+50℃
Operating Humidity	Maximum 95%RH
Sensitivity	LOW→HIGH(Multi-stage selectable) LOW: Can detect some motion such as wave hand HIGH: Can detect subtly motion, such as breath
Dimension(LxWxH)	67x46x45mm