

CDD系列宽支腿型全电动堆垛车

CDD SERIES LEG-INSERT TYPE FULL-ELECTRIC STACKER

主要特点

MAIN CHARACTER

- 1、美国CURTIS控制器，质量可靠，性能优异，使整车性能达到最佳状态
- 2、进口液压站，低噪音，小振动，密封性能好，确保起升下降平稳可靠
- 3、高强度车身设计，特殊压制工艺制造的“C”型钢门架，坚固耐用，使用寿命长
- 4、配置大容量牵引电池，电量持久，并选用智能充电器，德国REMA充电插件，充电方便快捷
- 5、宽支腿型车身，具有高度稳定性，支腿宽度可调节
- 6、锻造货叉，货叉外宽可调节，操作更方便
- 7、可选配人性化的护臂结构和折叠式踏板，关闭操作方便

1. Top quality controller system from CURTIS, high reliability, ensures best performance in different states
2. WINNER hydraulic power pack, low noise, few vibration and excellent leak tightness, ensures smooth lifting
3. High-strength frame design and "C" shaped mast, strong and durable, ensures longer service life
4. Configure with 240Ah large capacity battery, intelligent charger, REMA plug from Germany
5. Adjustable straddle leg, stable enough. Adjustable forging forks, convenient and solid enough
6. Optional humanized design of handrail and folded pedal, easy operating

可选配置 OPTIONAL




F型手把
F Type Handle




踏板扶手
Pedal and Handrail



交流电机
AC Driving Motor

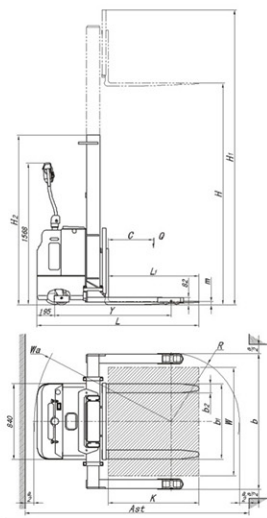

SKT12/SKT15

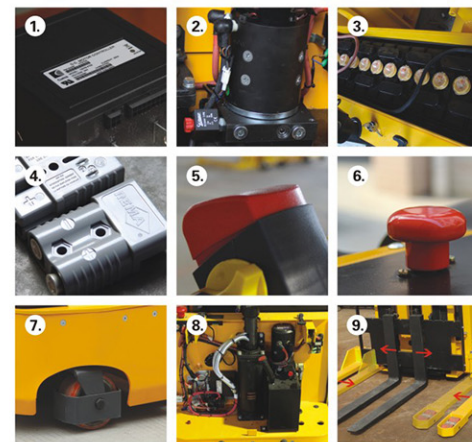

- 1、美国CURTIS控制器
 - 2、WINNER液压泵站
 - 3、240Ah大容量蓄电池
 - 4、德国REMA充电插件
 - 5、紧急反向行驶功能，按下此按钮，车子可反向行驶
 - 6、紧急情况下可按下红色断电开关，切断所有电源，车子立即停止
 - 7、平衡轮带护罩，保证操作者安全
 - 8、超大维护保养空间，打开后罩后内部部件一览无余
 - 9、货叉和支腿宽度可调
1. CURTIS controller from America
 2. WINNER pump station from Taiwan
 3. 240Ah large capacity battery
 4. REMA plug from Germany
 5. Reverse button, press this button, the truck will travel in reverse
 6. Press the red button in an emergency, cut down all the power, stop the truck
 7. Balance wheel with cover, protect the operator
 8. Large maintenance room
 9. Adjustable width of legs and forks

技术参数

TECHNICAL DATA

特性 Identification	产品型号 Model		CDD15						
	配置号 Config-code	标准型 Standard type	SK12/SK15						
		带踏板扶手 With pedal and handrail	SKT12/SKT15						
	驱动形式 Drive Unit		电动 Electric						
驾驶方式 Operation type		步行式 Pedestrian / 站驾式 Standing							
基本尺寸 Dimension	额定载重 Load capacity	Q	kg	1200/1500					
	载荷中心 Load center	C	mm	500					
	总长 Overall length	L	mm	1788					
	总宽 Overall width	b	mm	1197~1502					
	总高 Overall height	H2	mm	2166	1876	2101	2201	2301	2401
	起升高度 Lift height	H	mm	1600	2450	2900	3100	3300	3500
	作业时最大高度 Max working height	H1	mm	2410	3260	3710	3910	4110	4310
	货叉尺寸 Fork dimensions	L1 x b2 x m	mm	1000x100x35					
	货叉外宽 Maximum fork width	b1	mm	210~825					
	最小堆垛通道 Min. aisle width for stacking	Ast	mm	2475					
性能 Performance	行驶速度 Travel speed	满载 Loaded	Km/h 4.8						
		空载 Unloaded	Km/h 6.0						
	提升速度 Lift speed	满载 Loaded	mm/s 95						
		空载 Unloaded	mm/s 144						
	下降速度 Lowering speed	满载 Loaded	mm/s 150						
		空载 Unloaded	mm/s 120						
	制动方式 Brake type		电磁制动 Electric-magnetic						
电机 Electric Motor	驱动电机功率 Drive motor power		KW 1.2						
	提升电机功率 Lift motor power		KW 2.0						
	蓄电池容量/电压 Battery capacity/voltage		Ah/V 240/24						
重量 Weight	自重(不含电池) Weight without battery		kg	820	885	895	905	910	920
	电池重量 Battery weight		kg 235						