


1080P HIGH DEFINITION PTZ COLOR VIDEO CAMERAS

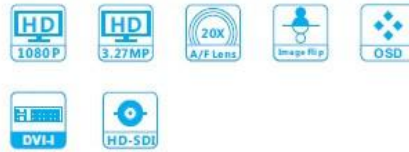

Order Models:


AMC-S2003: up to 1080p/60, 20X, 3.27MP

AMC-K2001: up to 1080p/60, 20X, 2.2MP


Specifications

- ※ 1/2.8" EXMOR CMOS image sensor, up to 3.27MP;
- ※ Up to 20X Optical, 12X digital zoom;
- ※ Video formats: 1080p/60, 1080p/50, 1080p/30, 1080p/25, 1080i/60, 1080i/50, 720p/60, 720p/50 etc;
- ※ Simultaneous outputs of HD and SD Videos;
- ※ Video interfaces: DVI-I (for DVI-D, HDMI, YPbPr, VGA, 5-BNC etc), HD-SDI;
- ※ Control: RS-232IN, RS-232OUT, RS-422/RS-485 etc;
- ※ Optional external wide angle lens, providing wider view angle;
- ※ On-screen display menu with simple program;
- ※ Has image flip function;
- ※ Support VISCA protocols, daisy chain;
- ※ IR remote controller;
- ※ Smart AE technology to effectively avoid the interference of complicated lights from projectors, monitors etc (only for AMC-S2003);
- ※ New design of PTZ mechanism with higher precision and reliability.

Dimensions

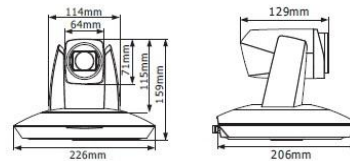

Rear View




Specifications

Model	AMC-S2003	AMC-K2001
Image Sensor	1/2.8" Exmor CMOS, 3.27MP	1/2.8" Exmor CMOS, 2.2MP
HD Signal Format	1080p/60, 1080p/50, 1080p/30, 1080p/29.97, 1080p/25, 1080i/60, 1080i/59.94, 1080i/50, 1080i/25, 1080i/30, 720p/60, 720p/50, 720p/30, 720p/25	
SD Signal Format	NTSC, PAL	
Focal	f=4.7-94.0mm	
IRIS	F1.6-F3.5	
Optical Zoom	20X	
Digital Zoom	12X	
Shortest Focus Distance	10mm(tele), 1,000mm(wide)	
Field of View	55.4 degree - 2.9 degree	
Focus	Auto, Manual, Zoom Trigger AF, PT Trigger AF, PTZ Trigger AF	Auto, Manual, PTZ Trigger AF
Illumination	0.5Lux(F1.6, 50 IRE, High Sensitivity Mode)	
Shutter	1/1 - 1/10,000s	1/30(25) - 1/60,000s
AGC	Auto/Manual	
BLC	Auto, Indoor, Outdoor, One Push, Manual	
WDR	Yes	
AE Control	Auto, Manual, Shutter Priority, Iris Priority, Bright Mode	Auto, Manual, Shutter Priority, Iris Priority
S/N Ratio	≥50dB	
Pan Range	Pan Range: -170° - 170°	
Tilt Range	Tilt Range: -30° - 90°	
P/T Speed	Pan: 0.1° - 200° /sec, Tilt: 0.1° - 150° /sec	
Preset Number	128	

OSD	Yes
Image Flip	Yes
Wide Angle Lens	Optional
HD Video Output Interface	DVI-I(for DVI-D,HDMI,YPbPR,VGA),HD-SDI
SD Video Output Interface	CVBS
Control Interface	RS-232IN, RS-232OUT, RS-422/RS-485
Protocol	VISCA and Support Daisy Chain, Pelco-D,Pelco-P
Prectra Address	64
Operating Temperature	0° C--+40° C
Storage Temperature	-20°C--+60° C
Humidity	≤95%(non-condensation)
Power	12VDC, <15W
Dimension(W X H X L)	226mm x 206mm x 159mm
Weight	1.7kg
Body Color	Black/Gray

Accessories

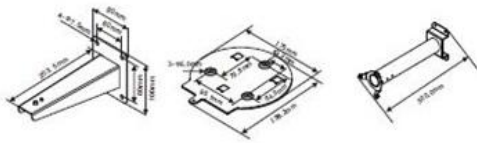

Wall Bracket

Ceiling Plate

Pole Bracket

*** Product specification are subject to change without notice ***

www.winsafecctv.com