

Product Description:

- Tinned ,annealed,stranded or solid copper conductor.
- PE OR XL-PE insulation.
- Rated temperature:60℃OR80℃.Rated voltage:90volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CSA FT1 vertical flamt test
- **Top coated conductor is available**

说明:

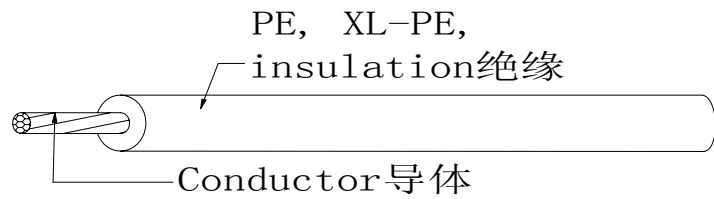
- 导体使用单股或绞线裸铜或镀锡铜
- PE, XL-PE绝缘
- 额定温度: 60℃,80℃ 额定电压: 90V
- 使用标准厚度, 易剥, 截断容易。
- 可通过UL VW-1 及 CSA FT1 , 垂直燃烧测试

Applications:

- Internal wiring of Class 2 circuits in electronic equipment or as insulated single in jacketed multiconductor cables

应用:

- 用于电子及电器设备内部配线

Construction:**构造:**

UL Style	Conductor		Insulation Thickness mm	Overall Diameter mm	Stand Put-up		Conductor Resistance at 20℃ Ω/KM
	AWG	No/mm			Ft/coil	M/Coil	
UL10444 (Stranded)	32	7/0.08	0.23	0.75	2000	610	597.00
	30	7/0.102	0.23	0.80	2000	610	381.00
	28	7/0.127	0.23	0.90	2000	610	239.00
	26	7/0.16	0.23	1.00	2000	610	150.00
	24	11/0.16	0.23	1.15	2000	610	94.20
	22	17/0.16	0.23	1.30	2000	610	59.40
	20	21/0.178	0.23	1.50	2000	610	36.70
	18	34/0.178	0.23	1.70	2000	610	23.20
UL10444 (Top-coated)	16	26/0.25	0.23	2.00	2000	610	14.60
	28	7/0.127	0.23	0.90	2000	610	248.00
	26	7/0.16	0.23	1.00	2000	610	150.00
	24	7/0.20	0.23	1.15	2000	610	88.70
	22	7/0.254	0.23	1.30	2000	610	54.70
UL10444 (Solid)	20	7/0.32	0.23	1.50	2000	610	37.10
	28	1/0.32	0.23	0.85	2000	610	239.00
	26	1/0.404	0.23	0.90	2000	610	143.00
	24	1/0.511	0.23	1.10	2000	610	89.30
	22	1/0.634	0.23	1.25	2000	610	56.40
	20	1/0.813	0.23	1.45	2000	610	35.20