



www.eng.com.tw

AC-DC 3W


3A-032WUxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,FCC ,CB,standard



Dimension:

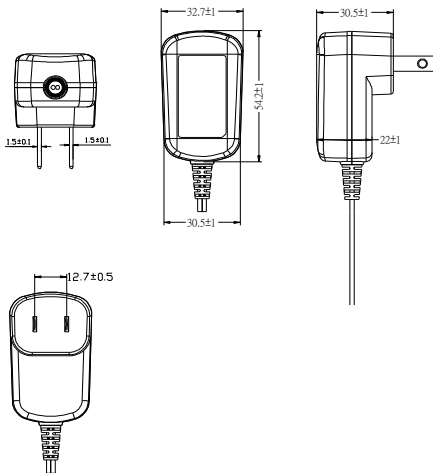

Model No.	Output	Additional Safety
3A-032WU05	4-7.5V 2.8W MAX for 4V; 3W MAX for others	
3A-032WU09	9-15V 3W MAX	

Specification:

Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	100mA
	Leakage Current	< 0.25mA
Others	Start up time	<3000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Conversing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15

英格爾科技股份有限公司
ENG ELECTRIC CO.,LTD.

TEL:886-3-212-1122 FAX:886-3-2121570 E-mail:eng@eng.com.tw

http:www.eng.com.tw





www.eng.com.tw

AC-DC 12W


3A-125WUxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,CB,PSE



Dimension:

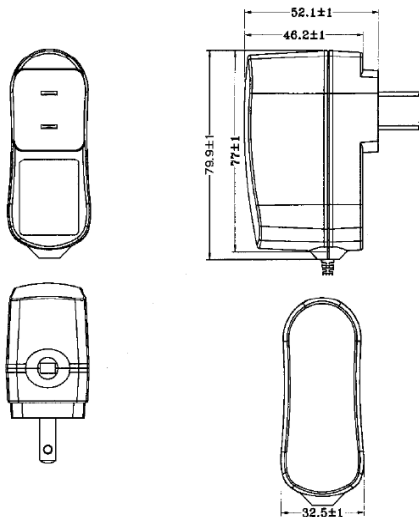

Model No.	Output		Additional Safety
	5V	2A	
3A-125WU05			

Specification:

Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	400mA
	Leakage Current	< 0.25mA
Others	Start up time	<3000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>6mS @ 100V~240V input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4

英格爾科技股份有限公司
ENG ELECTRIC CO.,LTD.

TEL:886-3-212-1122 FAX:886-3-2121570

台灣省桃園縣龜山鄉民生北路1段536號5樓

5F, No. 536, Sec.1, Min Sheng N. Rd.,

Kweishan Hsing, Taoyuan Hsiang, Taiwan

E-mail:eng@eng.com.tw

http:www.eng.com.tw



ISO 14001

