


DIN CAST IRON GLOBE CHECK VALVE PN16

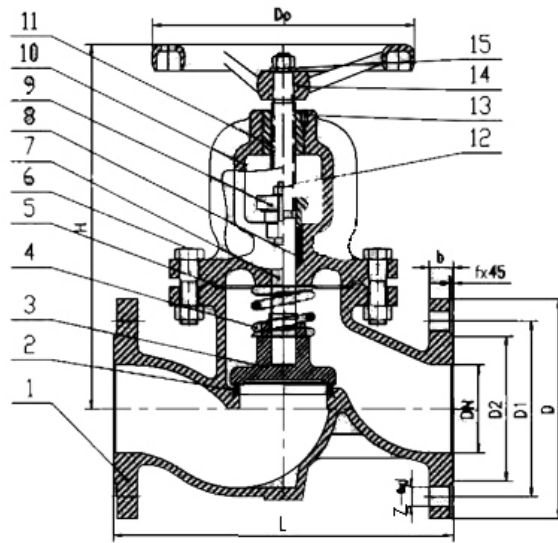

DESCRIPTION:

Available Medium: Water, Steam, Petroleum Products, T-Water, Steam

Working Temperature: H, T- $\leq 200^{\circ}\text{C}$, W- $\leq 100^{\circ}\text{C}$

Face to Face Dimensions: DIN3202 F1

Flange Dimensions: DIN2533

DIMENSIONS (MM)									
DN	L	D	D1	D2	b	Z- ϕ d	f	H	D0
15	130	95	65	47	14	4-14	2	170	80
20	150	105	75	58	16	4-14	2	170	80
25	160	115	85	68	16	4-14	2	190	100
32	180	140	100	78	18	4-18	2	210	120
40	200	150	110	88	18	4-18	3	220	120
50	230	165	125	102	20	4-18	3	235	140
65	290	185	145	122	20	4-18	3	275	160
80	310	200	160	138	22	8-18	3	335	240
100	350	220	180	158	24	8-18	3	375	240
125	400	250	210	188	26	8-18	3	425	280
150	480	285	240	212	26	8-23	3	490	320
200	600	340	295	268	30	12-23	3	620	360
250	730	405	355	320	32	12-27	3	705	400

MATERIALS

ITEM	PARTS NAME	MATERIAL
1	BODY	CAST IRON
2	SEAT RING	BRASS/STAINLESS STEEL
3	DISC	CAST IRON +BRASS/ STAINLESS STEEL
4	SPRING	STAINLESS STEEL
5	GASKET	GRAPHITE
6	BOLT NUT	CARBON STEEL
7	STEM	STAINLESS STEEL
8	PACKING	GRAPHITE
9	GLAND	CAST IRON
10	BONNET	CAST IRON
11	STEM NUT	BRASS
12	BOLT NUT	CARBON STEEL
13	BOLT	CARBON STEEL
14	WHEEL	CAST IRON
15	NUT GASKET	CARBON STEEL