



# Win-Kare Technology Company Ltd.

Unit 305,Block B, Danzhutou Hi-Tech Park, No.58 Yuandun Road ,  
Nanwan Street,Longgang District, Shenzhen, Duangdong, China  
Tel: 86 755 25003075; mail: service@win-kare.com

## User Manual

|                     |                                               |
|---------------------|-----------------------------------------------|
| Product Name:       | Foot Operated Slide Dimmer with ON/OFF Switch |
| Product Model:      | WK-300SP -1:                                  |
| Electrical Ratings: | 220-240VAC; 50/60hz; 2A; OP1:Max 300W;Ta: 45℃ |


### User Instructions:

1. WK-300SP-1 is suitable for dual light halogen lamp, incandescent lamp and LED lamp with dimmerable driver. It provides dimmer for the light and ON/OFF switch
2. The dimmer contains a replaceable fuse with rating 2A, 250V.
3. The wire dimension is: 3x0,75/3x1,0mm<sup>2</sup>, the max. external diameter of wire is 6.5mm.


### Installation:

1. Required parts for installation: 7 pcs of screws; 1 pcs of binding post.
2. Read the wiring drawing in **picture 1**;
3. Connect the wire of lamp 2 first, then connect the grounding line.
4. Connect input wire to the line-in port on the terminal.
5. Use the screw and binding post to fix the line according to **picture 2**.
6. Close the enclosure and secure with 3 screws.

**Picture 1**

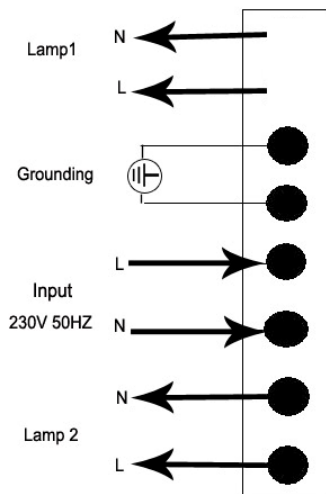

**Picture2**

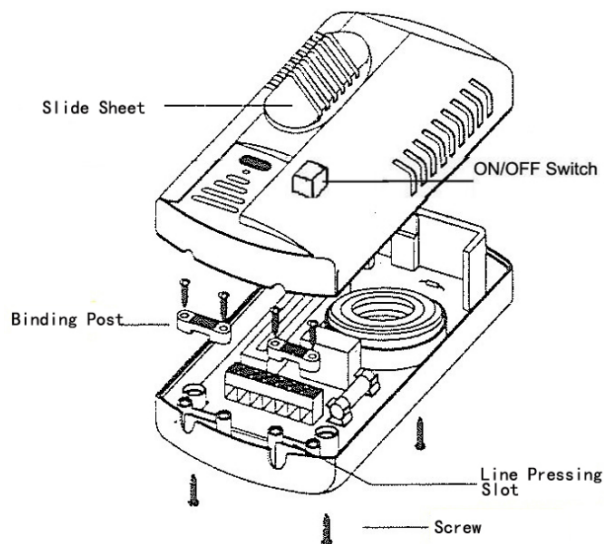

### Warning!

Always disconnect the power before you do any operation to the dimmer.

