


DIN CAST IRON NEW TYPE Y STRAINER PN16

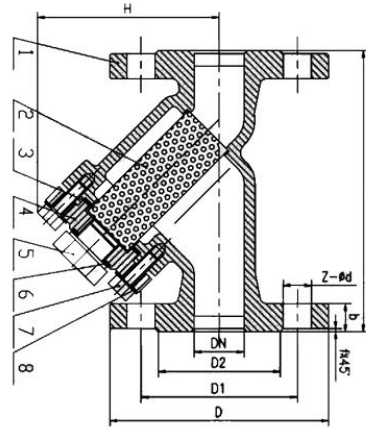

DESCRIPTION:

Available Medium: Water, Steam, Petroleum

Working Temperature: $\leq 200^{\circ}\text{C}$

Face to Face Dimensions: DIN3202 F1


Flange Dimensions: DIN2533

DIMENSIONS (MM)									
DN	L	D	D1	D2	b	Z-φd	f	H	KG
25	160	115	85	68	16	4-14	2	100	4
32	180	140	100	78	18	4-18	2	118	6
40	200	150	110	88	18	4-18	3	128	7
50	230	165	125	102	20	4-18	3	147	11.8
65	290	185	145	122	20	4-18	3	168	16.45
80	310	200	160	138	22	8-18	3	195	19
100	350	220	180	158	24	8-18	3	224	24.9
125	400	250	210	188	26	8-18	3	255	35.6
150	480	285	240	212	26	8-23	3	300	51.9
200	600	340	295	268	30	12-23	3	370	92.3
250	730	405	355	320	32	12-27	3	435	142
300	850	460	410	378	32	12-27	4	502	210

MATERIALS

ITEM	PARTS NAME	MATERIAL
1	BODY	CAST IRON
2	SCREEN	STAINLESS STEEL
3	GASKET	GRAPHITE
4	BONNET	CAST IRON
5	PLUG	GGG40 GRAPHITE
6	GASKET	GRAPHITE
7	BOLT	CARBON STEEL
8	GASKET	CARBON STEEL

DIN CAST IRON Y STRAINER PN16

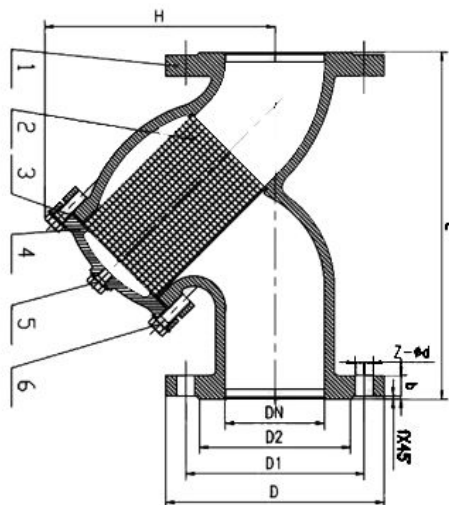

DESCRIPTION:

Available Medium: Water, Steam, Petroleum

Working Temperature: $\leq 200^{\circ}\text{C}$


Face to Face Dimensions: DIN3202 F1

Flange Dimensions: DIN2533 GB12233

MATERIALS		
ITEM	PARTS NAME	MATERIAL
1	BODY	CAST IRON
2	SCREEN	STAINLESS STEEL
3	GASKET	GRAPHITE
4	BONNET	CAST IRON
5	PLUG GASKET	GGG40 GRAPHITE
6	BOLT GASKET	CARBON STEEL

DIMENSIONS (MM)									
DN	L	D	D1	D2	b	Z-φd	f	H	KG
15	130	95	65	45	14	4-14	2	76	2.33
20	150	105	75	58	16	4-14	2	83	3
25	160	115	85	68	16	4-14	2	91	4
32	180	140	100	78	18	4-18	2	111	6
40	200	150	110	88	18	4-18	3	118	7
50	230	165	125	102	20	4-18	3	178	11.8
65	290	185	145	122	20	4-18	3	211	16.45
80	310	200	160	138	22	8-18	3	202	19
100	350	220	180	158	24	8-18	3	226	24.9
125	400	250	210	188	26	8-18	3	264	35.6
150	480	285	240	212	26	8-23	3	309	51.9
200	600	340	295	268	30	12-23	3	410	92.3
250	730	405	355	320	32	12-27	3	444	142
300	850	460	410	378	32	12-27	4	486	210
350	980	520	470	438	36	16-27	4	595	284.7
400	1100	580	525	490	38	16-30	4	673	399.4

DIN CAST IRON Y TYPE STRAINER, THREAD END, PN16

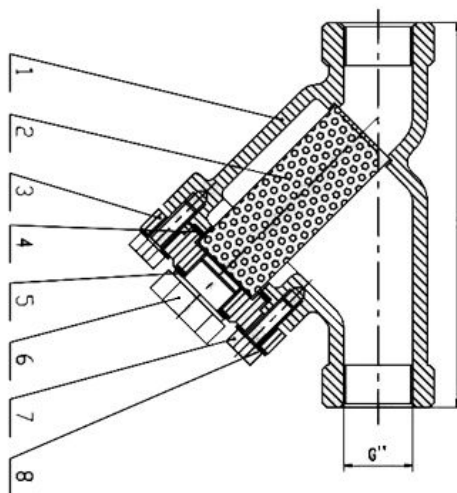

DESCRIPTION:

Available Medium: Water, Steam, Petroleum


Working Temperature: $\cong 200^{\circ}\text{C}$

Screwed:: BSP

MATERIALS		
ITEM	PARTS NAME	MATERIAL
1	BODY	CAST IRON
2	SCREEN	STAINLESS STEEL
3	BONNET	CAST IRON
4	GASKET	GRAPHITE
5	GASKET	GRAPHITE
6	PLUG	DUCTILE IRON
7	BOLT	CARBON STEEL
8	GASKET	CARBON STEEL

DIMENSIONS (MM)			
DN	L	G"	KG
15	90	1/2	1.1
20	100	3/4	1.49
25	120	1	1.92
32	140	1-1/4	3.62
40	170	1-1/2	3.8
50	200	2	6.7
65	260	2-1/2	
80	280	3	12.1

U-TYPE STRAINER

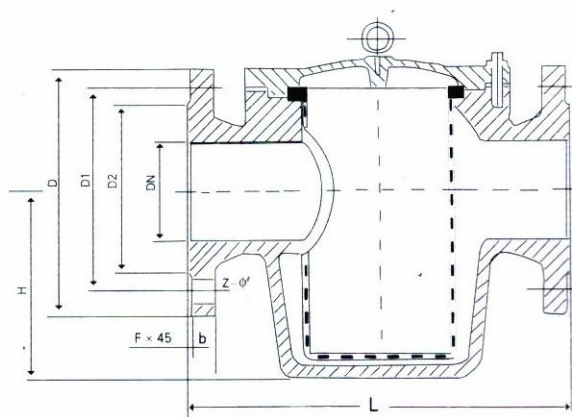

DESCRIPTION:

Available Medium: Water, Petroleum

Working Temperature: $\leq 120^{\circ}\text{C}$

Flange: DIN2532

Face to Face: DIN3202 F1

MATERIALS		
ITEM	PARTS NAME	MATERIAL
1	BODY/BONNET	GRAY CAST IRON
2	SCREEN	STAINLESS STEEL
3	BOLT/RING	CARBON STEEL
4	GASKET	GRAPHITE

DIMENSIONS (MM)								
DN	L	D	D1	D2	f	Z- φ d	H	kg
25	160	115	85	68	3	4-14	82	6.05
32	180	140	100	78	3	4-18	90	8.10
40	200	150	110	88	3	4-18	100	10.2
50	230	165	125	102	3	4-18	125	13.32
65	290	185	145	122	3	4-18	135	18
80	310	200	160	138	3	4-18	150	23.2
100	350	220	180	158	3	8-18	170	26.5
125	400	250	210	188	3	8-18	220	38.8
150	480	285	240	212	3	8-18	250	50
200	600	340	295	268	3	8-18	310	76.3