

3-WAY BALL VALVE, REDUCED, THREADED END, 1000WOG, WITH MOUNTING PAD (L TYPE) SIZE:1/4"-4"




- Investment Castings For Body And Cap
- Internal Entry Blow-Out Proof Stem
- Mounting Pad: ISO5211
- Pressure Rating: 1000PSI (PN63)
- Threaded Ends: ANSI B2.1, BS 21, DIN 259/2999
- Material: CF8M, CF8, CF3M, WCB
- Pressure Test : API 598

MATERIAL LIST

ITEM	PART	MATERIAL	QTY
1	CAP	CF8M	3
2	GASKET	PTFE	3
3	BALL SEAT	PTFE	4
4	BALL	SS316	1
5	BODY	CF8M	1
6	STEM	SS316	1
7	THRUST WASHER	PTFE	1
8	O-RING	VITON	1
9	STEM PACKING	PTFE	1
10	STEM RING	SS316	1
11	WASHER	SS301	1
12	NUT	SS304	2
13	PLATE WASHER	SS304	1
14	NUT STOPPER	SS304	1
15	LOCK DEVICE	SS304	1
16	HANDLE	SS304	1
17	HANDLE COVER	PLASTIC	1
18	STOP PIN	SS304	1

DIMENSION TABLE

SIZE	d	L	H	W	F	A	J	ISO5211	N-M	KGS
1/4"	9.5	75	66	130	37.5	57.5	9	F03/F04	8	0.70
3/8"	11	75	66	130	37.5	57.5	9	F03/F04	8	0.67
1/2"	12	75	66	130	37.5	57.5	9	F03/F04	8	0.63
3/4"	15	85	72	161	42.5	65.5	11	F04/F05	9	0.94
1"	20	100	77	161	50.0	79.0	11	F04/F05	15	1.38
1-1/4"	25	122	92	203	61.0	97.0	14	F05/F07	20	2.89
1-1/2"	32	131	96	203	65.5	106.5	14	F05/F07	30	3.60
2"	40	158	107	203	79.0	129.0	14	F05/F07	45	6.21
2-1/2"	49	178	135	254	89	145	17	F07/F10	50	9.00
3"	60	202	147	254	101	167	17	F07/F10	80	13.10
4"	75	246	160	310	123	203	17	F07/F10	100	22.10

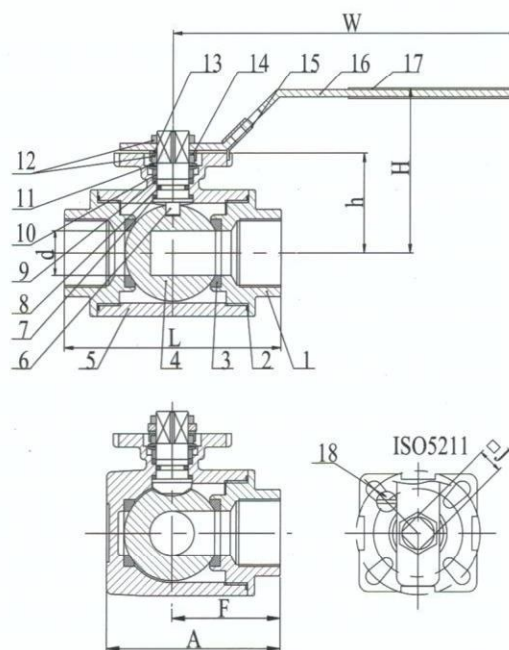

E-MAIL: nancygao@public.qd.sd.cn
nancygao@bdchina.com

TEL: 0086/532/66753307 OR 013953280182
 FAX: 0086/532/66753309 OR 85791651