


CDD系列轻型全电动堆垛车

CDD Series Light Type Full-electric Stacker

主要特点 Main character

- 1、侧面驾驶，操作方便
 - 2、采用进口驱动和液压泵站
 - 3、适应狭小空间操作和短时间工作
1. Convenient operation with side steering
 2. Imported driving wheel and hydraulic pumping station
 3. Suitable for short time using in narrow space

CDDH

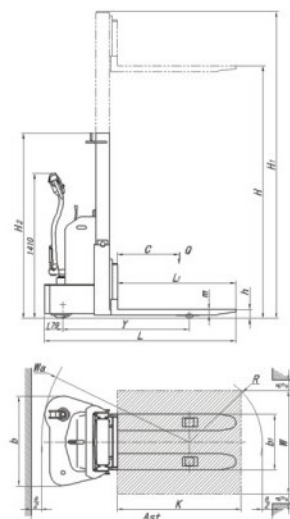

技术参数 Technical data

特性 Identification	产品型号 Product Model designation		CDD10H /CDD13H		
	驱动形式 Drive Unit		电动 Electric		
	驾驶方式 Operation type		步行式 Pedestrian		
	额定载重 Load capacity	Q kg	1000/1300		
	载荷中心 Load center	C mm	600		
基本尺寸 Dimension	总长 Overall length	L mm	1859	1859	1859
	总宽 Overall width	b mm	873	873	873
	总高 Overall height	H2 mm	2090	1800	2025
	起升高度 Lift height	H mm	1600	2450	2900
	作业时最大高度 Max working height	H1 mm	2090	2980	3433
	货叉最小离地高度 Lowered fork height	h mm	90		
	货叉尺寸 Fork dimensions	L1 x b2 x m mm	1150 x 160 x 56		
	货叉外宽 Maximum fork width	b1 mm	540	540	540
	最小堆垛通道 Min. aisle width for stacking	Ast mm	2280	2280	2280
	轴距 Wheelbase	Y mm	1230	1230	1230
	转弯半径 Turning radius	Wa mm	1440	1440	1440
性能 Performance	行驶速度 Travel speed	满载 Loaded	Km/h		
		空载 Unloaded	Km/h		
	提升速度 Lift speed	满载 Loaded	mm/s		
		空载 Unloaded	mm/s		
	下降速度 Lowering speed	满载 Loaded	mm/s		
		空载 Unloaded	mm/s		
电机 Electric Motor	制动方式 Brake type		电磁制动 Electric-magnetic		
	驱动电机功率 Drive motor power		KW		
	提升电机功率 Lift motor power		KW		
	蓄电池容量/电压 Battery capacity/voltage		Ah/V		
重量 Weight	自重(不含电池) Weight without battery		kg	463	530
	电池重量 Battery weight		kg	55	554

注：最小堆垛通道Ast的计算请参附录 Note: Min. stacking aisle width(Ast), please refer to Appendix