



**Product Description:**

- Tinned, annealed, stranded or solid copper conductor.
- TPE OR XL-PE insulation
- TPE OR XLPE jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature:105°C. Rated voltage:300Volts
- Passes UL VW-1&CUL FT1 vertical flame test

**说明:**

- 导体使用单股或绞线裸铜或镀锡铜。
- TPE或者XL-PE绝缘
- TPE 或者XL-PE 被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：105℃ 额定电压：300Volts
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试

**Applications:**


- Pipe heating cable where the acceptability of the combination is to be determined by Underwriters Laboratories Inc.

应用:

- 管加热电缆在可接受的组合来确定保险商实验室有限公司。

Construction:

构造:

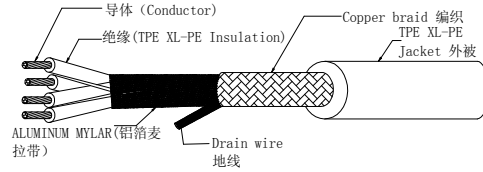

UL Style& CUL Type	Cores	Conductor		Insulation Thickness	Nom. Dia	Shield Coverage	Jacket Thickness	Overall Diameter	Conductor Resistance at 20°C
		AWG	No/mm						
UL20292 CUL (Stranded)	2C	22	17/0.16	0.51	1.8	>=65	0.51	5.5	59.4
		20	21/0.178	0.51	2.00	>=65	0.51	5.90	36.70
		18	34/0.178	0.51	2.20	>=65	0.51	6.40	23.20
		16	26/0.25	0.51	2.50	>=65	0.51	7.00	14.60
		14	41/0.25	0.51	2.90	>=65	0.51	7.80	8.96
UL20292 CUL (Stranded)	3C	22	17/0.16	0.51	1.8	>=65	0.51	5.80	59.40
		20	21/0.178	0.51	2.00	>=65	0.51	6.20	36.70
		18	34/0.178	0.51	2.20	>=65	0.51	6.80	23.20
		16	26/0.25	0.51	2.50	>=65	0.51	7.40	14.60
		14	41/0.25	0.51	2.90	>=65	0.51	8.40	8.96