

CDD系列三级门架全电动堆垛车

CDD SERIES 3-LAYER MAST FULL-ELECTRIC STACKER

主要特点

MAIN CHARACTER

- 1、美国CURTIS控制器，质量可靠，性能优异，使整车性能达到最佳状态
- 2、进口液压站，低噪音，小振动，密封性能好，确保起升下降平稳可靠
- 3、高强度车身设计和三级“H”型钢门架，坚固耐用，使用寿命长
- 4、配置大容量牵引电池，电量持久，并选用智能充电器，德国REMA充电插件，充电方便快捷
- 5、可选配人性化的护臂结构和折叠式踏板，开闭操作方便

1. Top quality controller system from CURTIS, high reliability, ensures best performance in different states
2. WINNER hydraulic power pack, low noise, few vibration and excellent leak tightness, ensures smooth lifting
3. High-strength frame design and 3-layer "H" shaped mast, strong and durable, ensures longer service life
4. Configure with 240Ah large capacity battery, intelligent charger, REMA plug from Germany
5. Optional humanized design of handrail and folded pedal, easy operating

可选配置 OPTIONAL




F型手把
F Type Handle



踏板扶手
Pedal and Handrail




交流电机
AC Driving Motor

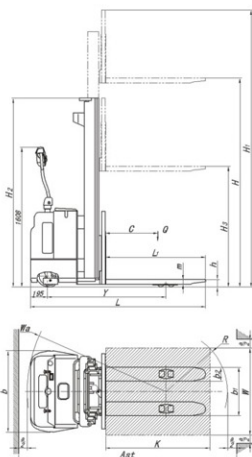

AT12/AT15



ATM12/ATM15

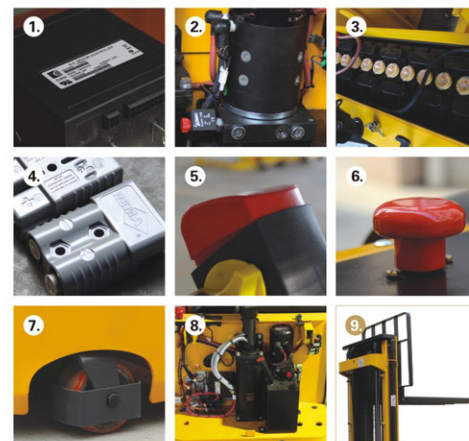

- 1、美国CURTIS控制器
- 2、WINNER液压泵站
- 3、240Ah大容量蓄电池
- 4、德国REMA充电插件
- 5、紧急反向行驶功能，按下此按钮，车子可反向行驶
- 6、紧急情况下可按下红色断电开关，切断所有电源，车子立即停止
- 7、平衡轮带护罩，保证操作者安全
- 8、超大维护保养空间，打开后罩后内部部件一览无余
- 9、带自由提升，货叉起升时门架不起升

1. CURTIS controller from America
2. WINNER pump station from Taiwan
3. 240Ah large capacity battery
4. REMA plug from Germany
5. Reverse button, press this button, the truck will travel in reverse
6. Press the red button in an emergency, cut down all the power, stop the truck
7. Balance wheel with cover, protect the operator
8. Large maintenance room
9. With free lifting height, when forks raising, mast is still

技术参数

TECHNICAL DATA

特性 Identification	产品型号 Model	CDD15				
	配置号 Config-code	标准型 Standard type	A12/A15			
		带踏板扶手 With pedal and handrail	AT12/AT15			
	驱动形式 Drive Unit	电动 Electric				
基本尺寸 Dimension	额定载重 Load capacity	Q	kg	1200/1500		
	载荷中心 Load center	C	mm	600		
	总长 Overall length	L	mm	2017		
	总宽 Overall width	b	mm	940		
	总高 Overall height	H2	mm	2175	2342	2508
	起升高度 Lift height	H	mm	4500	5000	5500
	作业时最大高度 Max working height	H1	mm	5373	5873	6373
	自由提升高度 Free lift height	H3	mm	1550	1717	1884
	货叉最小离地高度 Lowered fork height	h	mm	90		
	货叉尺寸 Fork dimensions	L1 × b2 × m	mm	1150 × 160 × 56		
	货叉外宽 Maximum fork width	b1	mm	560/680/720		
性能 Performance	行驶速度 Travel speed	满载 Loaded	Km/h 4.8			
		空载 Unloaded	Km/h 6.0			
	提升速度 Lift speed	满载 Loaded	mm/s 100			
		空载 Unloaded	mm/s 150			
	下降速度 Lowering speed	满载 Loaded	mm/s 110			
		空载 Unloaded	mm/s 120			
制动方式 Brake type	电磁制动 Electric-magnetic					
电机 Electric Motor	驱动电机功率 Drive motor power	KW 1.2				
	提升电机功率 Lift motor power	KW 3.0				
	蓄电池容量/电压 Battery capacity/voltage	Ah/V 240/24				
重量 Weight	自重(不含电池) Weight without battery	kg	1010	1085	1160	
	电池重量 Battery weight	kg	235			

注：最小堆垛通道Ast的计算请参附录 Note: Min. stacking aisle width(Ast), please refer to Appendix