


电子节能灯用

Energy-save lamp

CD11M

外形图Dimensions

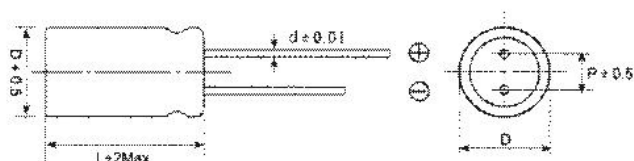

纹波电流倍乘因子Multiplier for ripple current
频率因子 Frequency correction factor for ripple current

ϕD	6.3	8	10	13	16	18
ϕd	0.5	0.6	0.6	0.6(0.8)	0.8	0.8
P	2.5	3.5	5	5	7.5	7.5

Frequency W.V Factor	120	1K	10-30K	30-100K
160-250	0.55	0.85	0.90	1.00
350-400	0.5	0.8	0.9	1.00

尺寸与最大纹波电流与阻抗一览表
Size And Max Ripple Current

尺寸Size: $\phi D \times L(\text{mm})$
纹波Ripple Current: (mA/105°C, 100KHz)

$C_n(\mu F)$ $U_n(V)$	160		200		250		400	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
1	6.3 × 12	23	6.3 × 12	25	6.3 × 12	25	8 × 12	28
2.2	6.3 × 12	35	6.3 × 12	40	6.3 × 12	40	8 × 12	49
3.3	6.3 × 12	46	8 × 12	60	10 × 12	60	8 × 16	69
4.7	6.3 × 12	55	8 × 12	71	10 × 12	71	10 × 12	80
6.8	8 × 12	67	8 × 12	86	10 × 16	100	10 × 16	111
10	8 × 12	97	10 × 12	116	10 × 16	116	13 × 20	150
22	10 × 16	186	10 × 20	223	10 × 20	223	13 × 25	254
33	10 × 20	255	13 × 20	310	13 × 20	310	16 × 25	380
47	13 × 20	350	13 × 25	370	13 × 20	415	16 × 3	500
68	13 × 20	480	13 × 25	500	13 × 25	550	16 × 35	655
100	13 × 25	630	16 × 30	735	16 × 30	735	18 × 40	840
150	16 × 30	840	16 × 35	970	16 × 35	1030		
220	16 × 35	970	18 × 35	1250	18 × 35	1340		
330	18 × 40	1530						

