
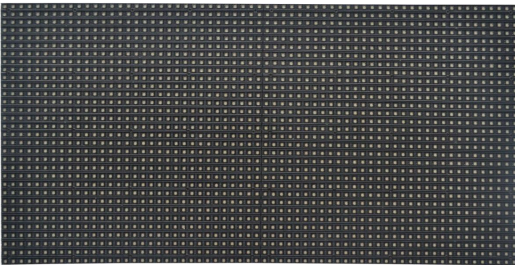


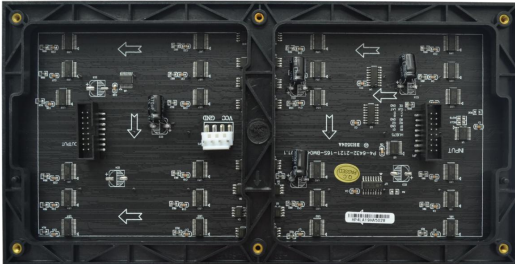

P4 Indoor Full Color Specification

 	Specification		
	Size:256mm×128mm		
	LED color:1R1G1B 3in1 led 2121		
	Module Power Consumption 6A / 30W		
	Constant Current Drive:1/16Scan IC SM16016/16017		
	RLED Epistar{350-400CD} Wavelength625±2nm		
	GLED Epistar{6500--750CD} Wavelength520±2nm		
	BLED Epistar{200--300CD} Wavelength470±2nm		
	Weight0.22kg		
	Module Thickness 1.5CM		
	Power Supply VH		
	Brightness 1200CD		
	Module Pixel 64×32=2048 Dot Pixel 4mm		
	LEDAngle Horizontal ≥140° Vertical ≥140°		
	Connector: HUB75		
	Color Ratio: R:G:B/3:6:1		
	Warranty	Use Life 100000Hrs	
		Warranty 2 Year	
	Screen Parameter	Brightness, automatic adjust by sensors	
		Pixel	62500 Dot
		Continuous working time ≥48hrs	
		Best view distance 4m--80m	
		Average Power consumption 450W/m ²	
	ValtageAC220V±10%		
	Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing			
Power cable	45CM by 2	Flat cable 20CM	
Carton Size	63.2*31.7*30	Volume 0.060CBM	
Weight	9.50kg	QTY/CTN 36PCS/CTN	
		30.6PCS/SQM	