

Product Description:

Tinned ,annealed,stranded or solid copper conductor.

- TPE insulation.
- Rated temperature:90 105°C .Rated voltage:600volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CUL FT1 vertical flame test
- **Top coated conductor is available**

说明:

- 导体使用单股或绞线裸铜或镀锡铜
- TPE绝缘
- 额定温度：90 105℃ 额定电压：600Volts
- 使用标准厚度，易剥，截断容易。
- 可通过UL VW-1 及 CUL FT1 ， 垂直燃烧测试
- 可使用先绞后镀（TC）为导体

Applications:


■ External Interconnection of Electronic Equipment, where the acceptability of the combination is to be determined by Underwriters Laboratories, Inc.

应用:

■ 外部互连的电子设备是由美国保险商实验室决定相结合的可接受性

Construction:

构造:

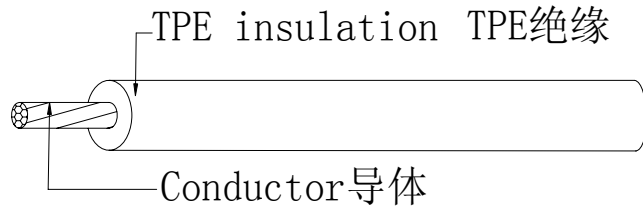

367	Conductor		Insulation Thickness	Overall Diameter	Standard Put-up		Conductor Resistance at 20°C
	AWG	No/mm			mm	mm	
UL10367 CUL (Stranded)	24	11/0.16	1.524	3.70	2000	610	94.20
	22	17/0.16	1.524	3.90	2000	610	59.40
	20	21/0.178	1.524	4.10	2000	610	36.70
	18	34/0.178	1.524	4.40	2000	610	23.20
	16	26/0.25	1.524	4.80	2000	610	14.60
	14	41/0.25	1.524	5.00	2000	610	94.20
	12	65/0.25	1.524	5.40	2000	610	59.40
	10	105/0.25	1.524	6.00	2000	610	59.40
UL10367 CUL (Solid)	24	1/0.511	1.524	3.70	2000	610	89.30
	22	1/0.643	1.524	3.90	2000	610	56.40
	20	1/0.813	1.524	4.10	2000	610	35.20
	18	1/1.024	1.524	4.40	2000	610	22.20
	16	1/1.29	1.524	4.80	2000	610	14.00
	14	1/1.63	1.524	5.00	2000	610	8.96
	12	1/2.05	1.524	5.40	2000	610	5.64
	10	1/2.588	1.524	6.00	2000	610	59.40