

Bluetooth In-Ceiling Speaker

It allows you to wirelessly stream audio from your portable device (iPod, iPad, iPhone, iPod Touch, Bluetooth unit etc.) To your Kitchen, Bathroom and every room


Control your music with freedom, no need to be connected to a docking station.

Simply use your smart device to control on/off, volume, tracks etc.

The built-in amplifier auto-senses a Bluetooth sync to working mode or Stand-by mode.

Initial Pairing to your Bluetooth In-Ceiling Speakers

Here, We take the iPhone for example, Other Bluetooth enabled devices will follow the Bluetooth settings instruction.

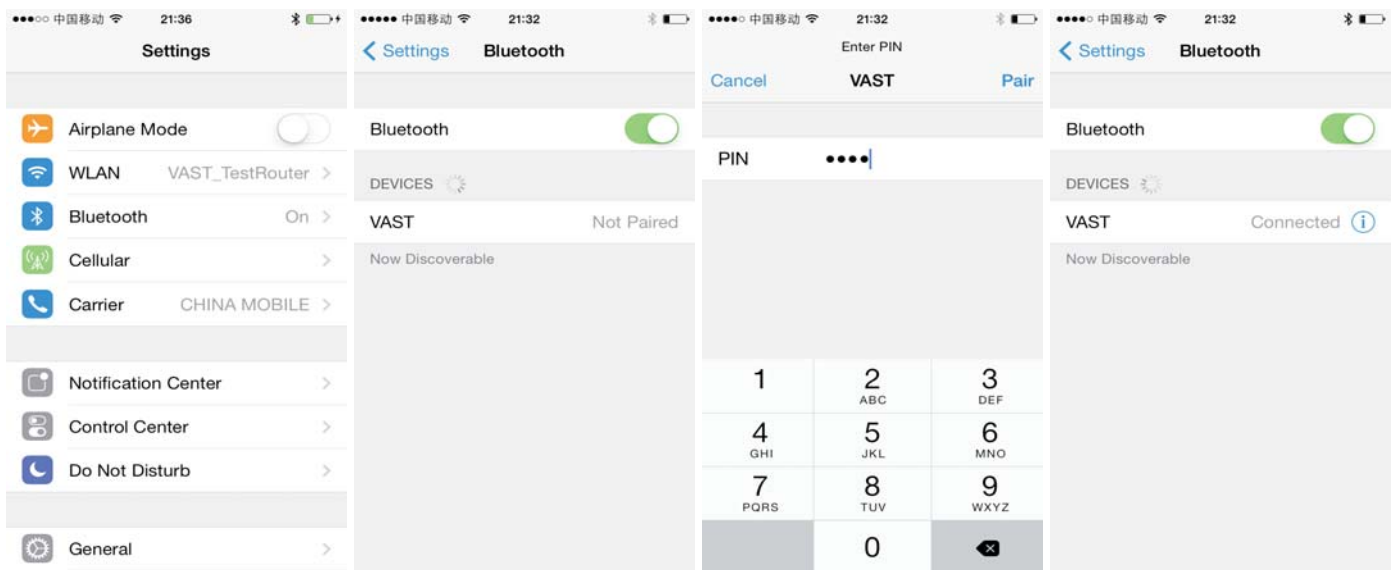

- 1 In touch home page, Open "Settings" Select "Bluetooth"
- 2 Open "Bluetooth" Search devices, Select the "VAST"
- 3 Enter PIN code:"0101"
- 4 Connected OK

Instructions (Disconnecting / Changing Connected Device) :


If you want to switch from your iPad, iPod touch, iPhone other Bluetooth enabled to an others device, Please kindly follow below steps:

1. Enter to Bluetooth setting and turn the Bluetooth function to "OFF".
2. The Bluetooth In-Ceiling Speaker can be connected to a different device now.
3. Follow the directions in "Initial pairing to your Bluetooth In-Ceiling Speaker" connect to different device.



Tips:

If you move out of range > 10m or turn off the Bluetooth function on your iPad, iPod touch, iPhone, or any other Bluetooth enabled device, the Bluetooth In-Ceiling Speaker will disconnect. To reconnect your devices, simply access the "Settings" icon on the Home Screen of your devices, Tap the "Bluetooth On" option, select the "VAST" device, No need enter the PIN code.

Bluetooth In-Ceiling Speaker

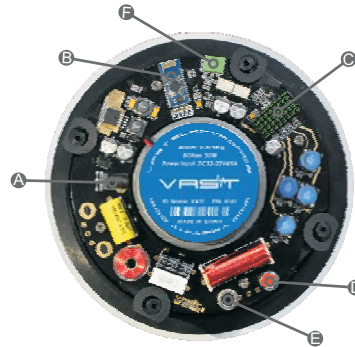

- A** DC Input: DC12-20V ⊕ ⊖
- B** Bluetooth V4.0
- C** 2 x 45W RMS Class "D" Digital Amplifier
- D** Speaker Terminals (Right--RED ⊕)
- E** Speaker Terminals (Right--BLACK ⊖)
- F** External Audio Input

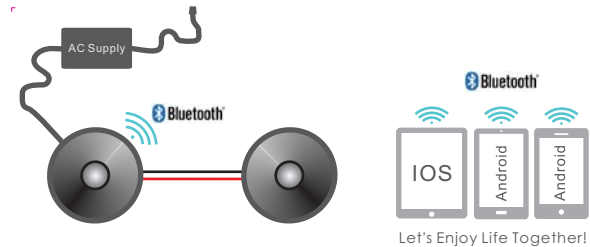

AMP Technical Specifications

Power Requirements: AC Supply: AC100-240V, 60/50Hz, 1A | DC Input: DC12-20V @ 5A
 Total Quiescent Current: Typical 40mA
 Frequency Response: 20Hz to 35KHz (± 3dB)
 Speaker Impedance: 8 ohms - 4 ohms minimum
 Output Power(RMS): 2CH*45W
 External Audio Input: AUX(3.81mm connector)

Bluetooth Technical Specifications

Bluetooth System: Bluetooth V4.0 Version
 Frequency Range: 2.40GHz-2.4832GHz (ISM Band)
 RF Channels: 79 Channels for USA, Japan, and Europe
 Receiver sensitivity: -90 dBm
 Range: Up to 10 Metres
 ID Name: VAST
 Security: 4-Digit PIN Code "0101"

Speaker Technical Specifications

Rated Power: 30W
 Rated impedance: 8Ohm
 Frequency Range: 50Hz-35KHz (-6dB)
 Sensitivity: 91 ± 2dB
 Hole Size: Ø179mm
 Dimension: Ø205*90mm (Diameter*Thickness)
 Material: ABS
 Protrusion: 4mm
 Speaker Unit: 1"swirl loaded titanium dome tweeter, 5.25"glass fiber cone bass/midrange

Packing and Accessory:

1pc (V-BT580H) Bluetooth In-Ceiling Amplifier Speaker
 1pc (V-CS580) Ceiling Speaker
 1pc (V-P190) power adaptor