



**Product Description:**

- Tinned, annealed, stranded or solid copper conductor.
- TPE OR XL-PE insulation
- TPE jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature: 105°C. Rated voltage: 600V OR 1000V
- Passes UL VW-1 & CUL FT1 vertical flame test

**说明:**

- 导体使用单股或绞线裸铜或镀锡铜。
- TPE或者XL-PE绝缘
- TPE被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：105℃ 额定电压：600V 或者1000V
- 可通过UL VW-1 及 CUL FT1，垂直燃烧测试

**Applications:**


- External interconnection or internal wiring of electronic equipment.

应用:

- 外部互连或电子设备的内部布线

Construction:

构造:

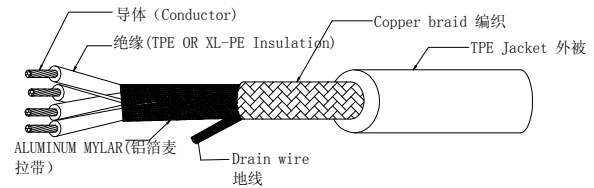

UL Style & CUL Type	Cores	Conductor		Insulation Thickness mm	Nom. Dia mm	Shield Coverage %	Jacket Thickness mm	Overall Diameter mm	Conductor Resistance at 20°C Ω /KM
		AWG	No/mm						
UL21184 CUL (Stranded)	2C	18	34/0.178	0.76	2.80	>=65	0.76	7.80	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	8.40	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	9.20	8.96
		12	65/0.25	0.76	4.00	>=65	0.76	10.2	5.64
UL21184 CUL (Stranded)	3C	18	34/0.178	0.76	2.80	>=65	0.76	8.20	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	8.80	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	9.80	8.96
		12	65/0.25	0.76	4.00	>=65	0.76	11.00	5.64
UL21184 CUL (Stranded)	4C	18	34/0.178	0.76	2.80	>=65	0.76	9.00	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	9.80	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	10.80	8.96
		12	65/0.25	0.76	4.00	>=65	0.76	12.00	5.64