


SV-328 LCD Projector

Accessories and Lenses

Supplied Accessories	Remote Control x 1,
	UL power wire x 1,
	AV wire x 1
	VGA wire x 1
	user's manual x 1

Replacement Parts

Lamp	LED
Remote Control	HL03031
Filter	UX38841

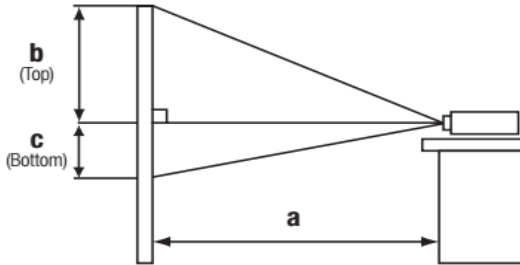

a: Projector distance

b: Lens centre to higher edge of the screen

c: Lens centre to the lower edge of the screen

Image size 4:3(from Projector's end)

ScreenSize (Diagonal)	Projector distance		Screen Height (mm)	
	Width(m)	Tele(m)	b(top)	c(bottom)
30"(0.8m)	0.9	1	39	7
40"(1.0m)	1.2	1.4	52	9
50"(1.3m)	1.5	1.8	65	11
60"(2.5m)	1.8	2.1	78	13
100"(2.5m)	3	3.6	131	22
200"(5.1m)	6	7.2	261	44
300(7.6m)	9.1	10.9	392	65

Image size 16:9(from Projector's end)

ScreenSize (Diagonal)	Projector distance(a)		Screen Height (mm)	
	Width(m)	Tele(m)	b(top)	c(bottom)
30"(0.8m)	0.9	1	39	1
40"(1.0m)	1.2	1.4	52	1
50"(1.3m)	1.5	1.8	65	1
60"(2.5m)	1.8	2.1	78	2
100"(2.5m)	3	3.6	131	3
200"(5.1m)	6	7.2	261	6
300(7.6m)	9.1	10.9	392	9

sales@4szqianpu.com

WWW.szqiangpu.com

Display	Projection Technology	Single TFT LCD Panel Native
	LCD Size	5.8 inch
	Resolution	WXGA-1280*800
	White Light Output	2800 ANSI Lumen
	Color Light Output	2800 ANSI Lumen
	Colors	16.77 million colors
	Aspect Ratio	Native 4:3 , 16:9 compatible.
	Contrast Ratio	2000:1
	Throw Ratio	1.5-1.8:1
	Focus Distance	35"-453"
Display Size	54"-160"	
Lens&Operation	Lens	F=200mm
	Lamp	LED Lamp
	Expected Lmap Life*	Approximately 50000 hours
	Expected Filter	Approximately 50000 hours
Compatibility	Speaker Output	2W*2
	Keystone	Hand V: +/-15°
	Copmputer	VGA,SVGA,XGA,WXGA,WXGA+/SXGA/ WSGA+UXGA
	H-Sync	31.5k HZ-106k Hz
	V-Sync	56 Hz-120 Hz
	Composite Video	NTSC, NTSC4.43,PLA, PLA-M,-N,SECAM
	Componet Video	480i,480p,576i,720p, 1080i,1080p
	HDMI	480i,480p,576i,720p, 1080i,1080p
		Computer signal TMDS Clock27mhz-150MHZ
	Connectors	Digital Input
PC signal Input		VGA Port
TV signal input		DVB-T digital TV Free view, Support MPEG-2、H.264
Video Input		
		AV (RCA Terminal x1)
		Color Pr/Pb/Y (RCA Terminalx3)
		HDMI Ports (HDMI Terminalx2)
Audio Input		RCA signalx2
USB		USB D-SUB Interfacex2
Control Terminals		9-pin D-sub x 1 (RS-232 control)
Rating&Warranty	Power Supply	AC100-120V/ AC220-240V,50/60Hz
	Power Consumption	150W
	Operating Temperature	41°F-95°F (5°C-35°C)
	Dimensions(W x D x H)	303mmx222mmx120mm(including protruding parts)
	Weight	Approximately 3.2Kg (not including the packing)
	Approvals	FCC CCC
	Warranty	Projector/ lamp :2 Years/6 month*** Extended Service Contract available(additional cost)
Notice		* Actual filter life will vary by individual filter based on environment conditions, selected operating mode, user setting and usage, Hours of average filter specified are not guaranteed and do not constitute part of the product warranty. Lamp brightness decreases over time
		** Where a lamp fails within warranty and a replacement lamp will be maximum of 6 months(dependent on warranty hours stated). The specification above and photography is for reference only and may be subject to change