

Product Description:

- Tinned ,annealed,stranded or solid copper conductor.TPE XL-PE insulation
- Tinned copper wire spiral shield
- TPE jacketed single core
- Use of spiral shield allows for fast and simple termination
- Rated temperature:105°C.Rated voltage:600V
- Passes UL VW-1&CUL FT1 vertical flame test

说明:

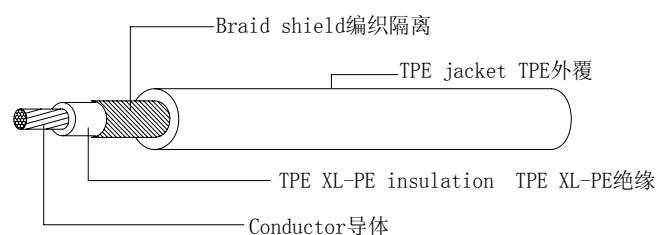
- 导体使用单股或绞线裸铜或镀锡铜,TPE绝缘
- 镀锡铜线缠绕
- 单芯TPE被覆
- 编织隔离
- 额定温度: 105℃ 额定电压: 600V
- 可通过UL VW-1 及 CUL FT1 , 垂直燃烧测试

Applications:

- Internal wiring

应用:

- 内部布线。

Construction:**构造:**

UL Style& CUL Type	Conductor		Insulation Thickness	No.of core	Shielded Coverage	Jacket Thickness	Overall Diameter	Conductor Resistance at 20℃
	AWG	No/mm	mm		%	mm	mm	Ω/KM
UL10734 CUL (Stranded)	30	7/0.10	0.76	1	≥65	0.38	3.10	381.00
	28	7/0.127	0.76	1	≥65	0.38	3.20	239.00
	26	7/0.16	0.76	1	≥65	0.38	3.30	150.00
	24	11/0.16	0.76	1	≥65	0.38	3.50	94.20
	22	17/0.16	0.76	1	≥65	0.38	3.70	59.40
	20	21/0.178	0.76	1	≥65	0.38	4.20	36.70
	18	34/0.178	0.76	1	≥65	0.38	4.90	23.20
	16	26/0.25	0.76	1	≥65	0.38	5.10	14.60
	14	41/0.25	0.76	1	≥65	0.38	5.70	8.96