

Product Description:

- Tinned ,annealed,stranded or solid copper conductor.
- PVC insulation.
- Rated temperature:80℃ .Rated voltage:300volts
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1&CSA FT1 vertical flamt test
- **Top coated conductor is available**

说明:

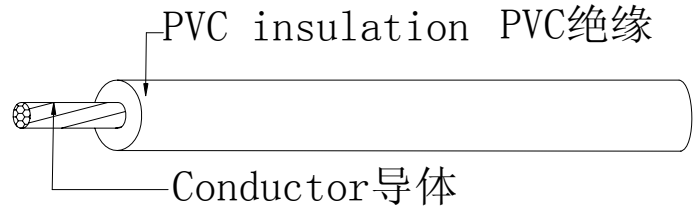
- 导体使用单股或绞线裸铜或镀锡铜
- PVC绝缘
- 额定温度：80℃额定电压：300Volts
- 使用标准厚度，易剥，截断容易。
- 可通过UL VW-1 及 CSA FT1 ，垂直燃烧测试

Applications:

- For general purpose internal wiring of electronic and electricalequipment

应用:

- 用于电子及电器设备内部配线

Construction:**构造:**

UL Style& CSA Type	Conductor		Insulation Thickness mm	Overall Diameter mm	Stand Put-up		Conductor Resistance at 20℃ Ω/KM
	AWG	No/mm			Ft/coil	M/Coil	
UL1581 CSA AWM I A (Stranded)	18	34/0.18	0.40	2.10	2000	610	23.20
	16	26/0.25	0.40	2.40	2000	610	14.60
	15	33/0.25	0.40	2.60	2000	610	11.10
	14	41/0.25	0.40	2.80	2000	610	8.96
	13	52/0.25	0.40	3.10	1000	305	6.97
	12	65/0.25	0.40	3.40	1000	305	5.64
	11	83/0.25	0.40	3.70	1000	305	4.39
	10	105/0.25	0.40	4.10	1000	305	3.55
UL1581 CSA AWM I A (Solid)	18	1/1.02	0.40	2.00	2000	610	22.20
	16	1/1.29	0.40	2.25	2000	610	14.00
	15	1/1.45	0.40	2.35	2000	610	10.80
	14	1/1.63	0.40	2.65	2000	610	8.78
	13	1/1.83	0.40	2.90	2000	610	6.82
	12	1/2.05	0.40	3.00	1000	305	5.53
	11	1/2.3	0.40	3.30	1000	305	4.30
	10	1/2.58	0.40	3.60	1000	305	3.48