

Product Description:

- Tinned, annealed, stranded or solid copper conductor.
- TPE OR XL-PE insulation
- TPE jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature:105°C. Rated voltage:600V
- Passes UL VW-1&CUL FT1 vertical flame test

说明:

- 导体使用单股或绞线裸铜或镀锡铜。
- TPE或者XL-PE绝缘
- TPE被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：105℃额定电压：600V
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试

Applications:


- Internal wiring or external wiring

应用:

- 内部布线或外部接线

Construction:

构造:

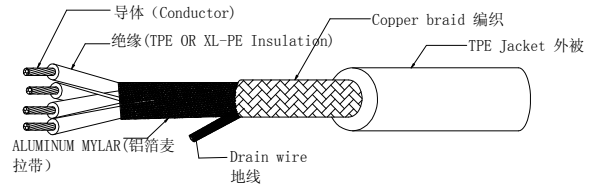

UL Style& CUL Type	Cores	Conductor		Insulation Thickness mm	Nom. Dia mm	Shield Coverage %	Jacket Thickness mm	Overall Dimeter mm	Conductor Resistance at 20°C Ω /KM
		AWG	No/mm						
UL21183 CUL (Stranded)	2C	18	34/0.178	0.76	2.80	>=65	0.76	7.80	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	8.40	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	9.20	8.96
		12	65/0.25	0.76	4.00	>=65	0.76	10.2	5.64
UL21183 CUL (Stranded)	3C	18	34/0.178	0.76	2.80	>=65	0.76	8.20	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	8.80	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	9.80	8.96
		12	65/0.25	0.76	4.00	>=65	0.76	11.00	5.64
UL21183 CUL (Stranded)	4C	18	34/0.178	0.76	2.80	>=65	0.76	9.00	23.20
		16	26/0.25	0.76	3.10	>=65	0.76	9.80	14.60
		14	41/0.25	0.76	3.50	>=65	0.76	10.80	8.96
		12	65/0.25	0.76	4.00	>=65	0.76	12.00	5.64