

WOLF-Guard[®]
All For Your Security

GSM Alarm System

- Supports 100 wireless sensors
- One relay switch
- Remote control the system via App, SMS, RFID card, remote call, remote control

Enjoy the home security



2015 New APP Controlled Wireless & Wired GSM Home Security Alarm System

Touch Keypad Alarm Base Unit + 1 PIR Motion Sensors + 1 Wireless Door/Window Sensors +
+ 2 Remote Controls + 2 RFID cards + 1 Power Supply



Wolf-guard[®] APP

Manage your alarm system from anywhere:

- Away arm
- Disarm alarm system
- Check the system status
- Android user search "Wolf-guard" from Google play
- iPhone user search "Wolf-guard" from app store



Upgrade your expectations

A burglar can easily disable some of the simpler, less expensive detection devices. The more complex and unfamiliar devices, the more likely the burglar is to trigger the alarm or give up trying to disable it. But getting all the high-end security gadgets will cost you a lot and it may be very hard for you to use. Below you will find some advanced features from our new alarm system:

- Support Android and iPhone App
- Arm and Disarm via RFID card
- Humanized menu
- Elegant design with touch panel



Manage your alarm system from anywhere

You can arm the alarm panel via phone(SMS, Call), Android app/iPhone app, remote control, RFID card or the arm button of alarm base unit. If you frequently travel or want to make certain that your home is secure while you are away, this system is an ideal choose for you.



Alarm Triggered

The alarm system will be triggered by door sensor, PIR motion sensor, emergency SOS alarm and other detectors. If thief want to break your door/window to get in your house, the door sensor and pir motion sensor will trigger the alarm base unit to alarm.



Taking Action

When the alarm is triggered at your home, the siren will immediately sound to alert the thief, the alarm base unit will call your preset alarm phone number and also send SMS to tell you which detector is triggered, then you can have time to take further action to make sure your home/office is security.




Two-way SOS Talking

If you need, you can also contact the police, fire department, hospital or other emergency personnel to come to your home immediately. You can contact child/older to confirm whether they are okay or in need of assistance, and if the older need emergency help, they can trigger the alarm system to let you know they need your help.



More Details

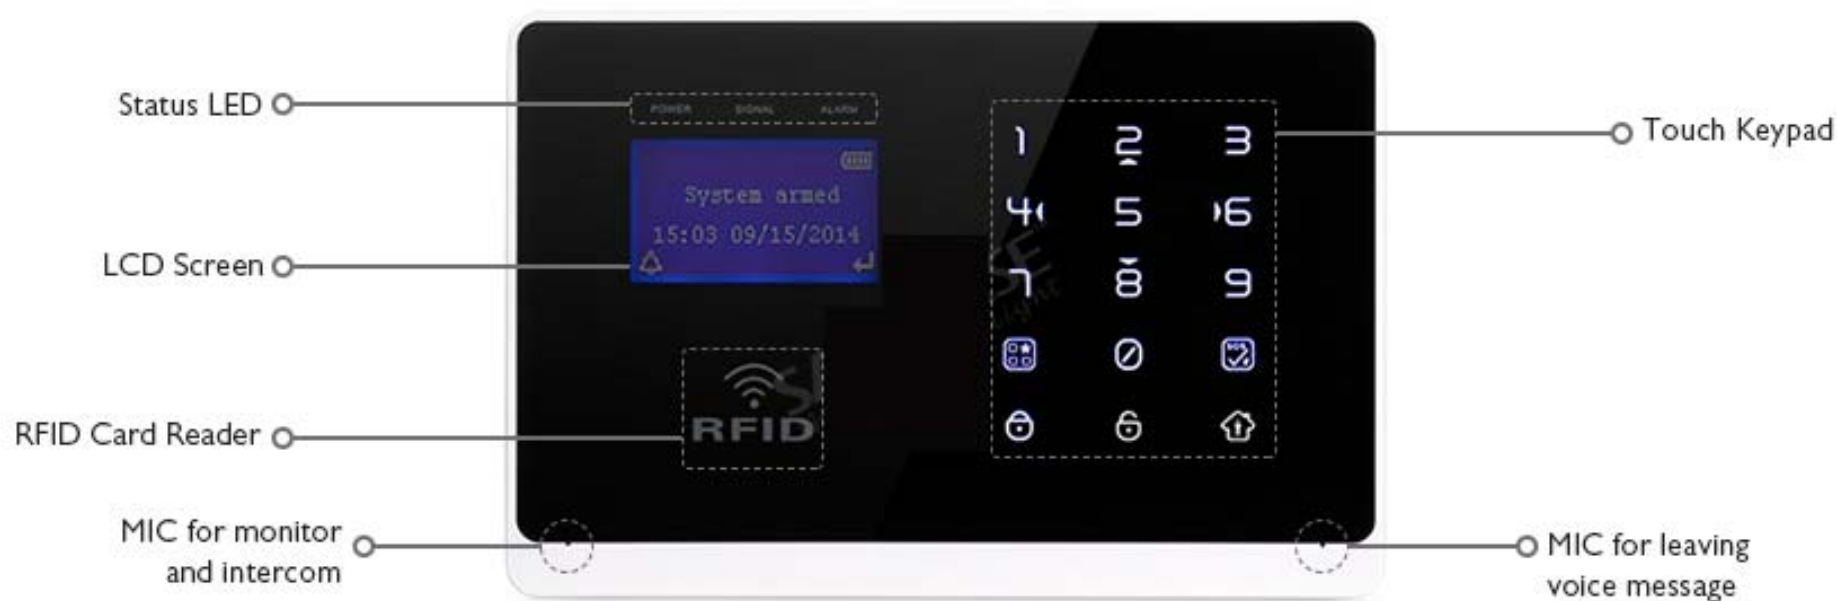

Main Functions

- Android APP and iPhone APP for easy control, enjoy the security.
- **Four Bands: 850/900/1800/1900MHZ**, for worldwide usage.
- Elegant touch keypad Design, Built-in RFID reader, can use 125KHz RFID card to arm/disarm the alarm base unit.
- Friendly humanized menu and voice prompt for easy operation, all information will be displayed on TFT color screen, you can operate it like mobile phone.
- **10 Wireless defense zones**: Each defense zone can be coded 10 wireless sensor, so totally can be coded 100 wireless sensors.
- 2 Wired defense zones: Can be totally connected to different defense zone's wired sensors. ■ No need to plug into a phone line: Simply insert a SIM card into the Wireless GSM Control Host.
- Tamper alarm function: there is a button at the back side of the panel, it will make alarm once the button is loosen.
- Blue LCD screen with time clock and alarm status display.
- 3 Groups of timely Arm and Disarm: You can timely Arm and Disarm the system even you are not at home.
- Can store 6 phone numbers: when alarming, system will make alarm call to these numbers three times automatically.
- Dial on the keypad directly to make a phone call just like the cellphone.
- **Remote control the alarm system Arming, Disarming, Monitoring and Intercom by your cellphone(SMS, Call, APP).**
- 10-second automatic message recording: After you connecting the GSM SIM card, you can record 10-second message.
- SOS, fire, gas, door, hall, window, balcony, and boundary places alarm.
- Real-time, delay, 24 hours, bypass defense zones programming function.
- Wireless coding: easy to add additional wireless accessories.
- **SMS confirmed** 聽 when you Arm/Disarm the alarm system through Text.
- SMS alert for power failure or recovery.
- **Built-in Backup rechargeable battery**: Still can last for 5 hours and Send SMS to remind you when power off.
- Built-in MIC and Loudspeaker, easy for you monitor or intercom with the spot. (**NOT built-in siren**)
- There is GSM signal bar on the LED screen: easy to check the GSM signal strength.
- Can be used as GSM alarm system(with compatible GSM SIM card) or Spot alarm system. (Without SIM card)
- **The Main Host can connect more than one wireless flash sirens A6 and one wired siren at the same time.**

Application



Office



Residential



Retailing



Garage



Boat Ship



RV/Camper

Installation Guide

If you need, you can also contact the police, fire department, hospital or other emergency personnel to come to your home immediately. You can contact child/older to confirm whether they are okay or in need of assistance.



The Standard Kit of YL-007M2FX:



GSM Alarm Base Unit

Input Voltage	DC 12V
Standby Current	< 55mA
Alarming Current	< 450mA
Wireless Frequency	433MHz
GSM Frequency	850 / 900 / 1800 / 1900MHz
Sensors	10 Wireless zone can max store 100 wireless sensors
Remote Control	Store Max. 8 wireless remotes
125KHz RFID cards	Store Max. 10 RFID cards
Wired Sensor	2 Wired sensors zone can connect N pcs wired sensors.
Back-up Battery	Last 4 hours when power cut off
Siren	Support one wired siren and more wireless flash sirens

Wireless Door/Window Sensor (Gap Detector. There is a SOS button on door sensor)

Power Supply	27A 12V Battery
Static Current	≤20 mA
Transmission Current	≤15mA
Transmission Frequency	433MHZ ± 0.5MHZ
Transmission Distance	About 30m with one barrier
Internal Distance	15 mm
Working Condition	Temperature -10 degrees ~ + 40 degrees
Humidity	≤ 90% rh
Battery Life Time	About 12 months

Wireless P.I.R Motion Detector

Power Supply	4x AAA battery
Transmission Current	≤20mA
Static Current	≤10mA
Wireless Frequency	433MHZ ± 0.5MHZ
Transmission Distance	About 30m with one barrier
Detective Speed	0.3 - 3m/s
Detective Distance	5 - 12m
Detective Range	Horizontal 110°, Vertical 60°
Working Condition	Temperature -10 degrees ~ + 40 degrees
Humidity	≤ 90 rh
Battery Life Time	About 12 months

Remote Control (Keyfobs)

Static Current	0
Emission Current	≤15 mA
Transmission Frequency	433MHZ ± 0.5MHZ
Emission Speed	T≤1 second
Emission Distance	About 30 meters
Working Condition	Temperature -10 degrees ~ + 40 degrees
Humidity	≤ 90 rh
Battery Life Time	About 12 months

We also have other Wireless & Wired accessories to meet your need of beefing up your alarm system, if you need them, please feel free to contact us.