TG08-1300-011B

Specification

- Contact rating : 18A 125VDC UL & C-UL
  25A 125VAC
  1HP 125VAC 2HP 250VAC
  13(13A) 250~ 5E4 ENEC
  15(15)A 125V~ 5E4
- Initial contact resistance
  With by-pass : 30mΩ(max.)
- Insulation resistance : 500MΩ(min.) 500VDC
- Terminal to terminal dielectric
- Initial withstand voltage :
  Please reference test specification-3.3
- Operation life for loading : 50,000 cycles(min.)
- Operation force : full stroke 32±5N (MAX 47N)
- Lock type : lock on/off
- Material used must be comply with BQI-0555.
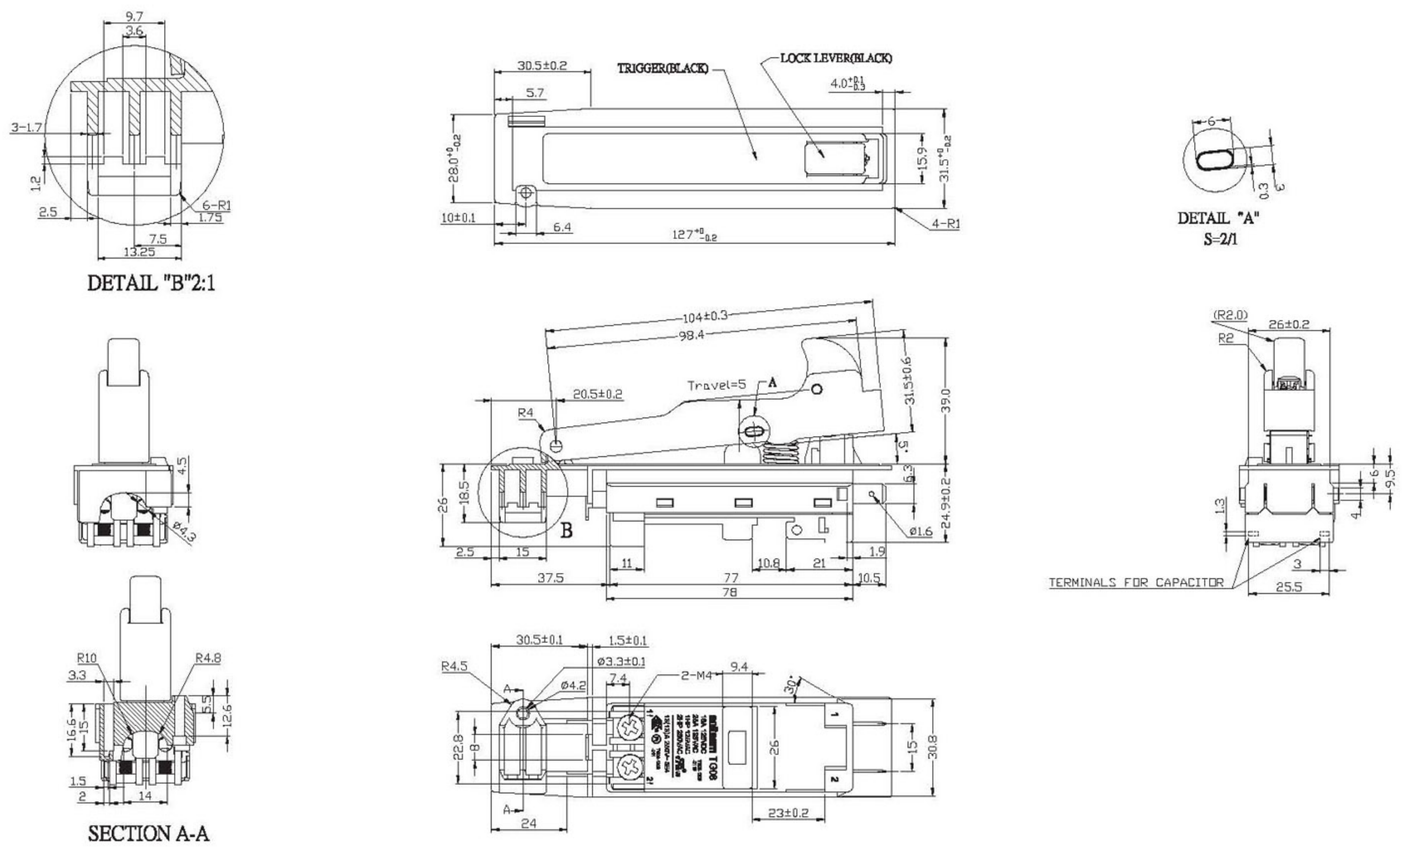
Dimensions in mm